RX-7 Factory Service Material

This manual can be downloaded for free from http://members.xoom.com/twinturboteddy/fsm/rx7.htm

Or you can donate \$10 to diepat@earthlink.net through paypal.com and a gift CD with all manuals and resources I carry will be sent to you.

This includes

1993 Factory Service Manual 1988 Factory Service Manual 1995 Printed Microfiche of all parts 1989 Printed Microfiche of all parts* 1990 Printed Microfiche of all parts* 1986 Printed Microfiche of all parts* 1987 Printed Microfiche of all parts*

The \$10 donation is used to offset the tremendous amount of time it takes to make everything available.



^{*} These works are currently in process and may or not be readily available upon request. They will be hosted on the same link above and for download

1988 Mazda RX-7

Wiring Diagram

FOREWORD

This wiring diagram incorporates the wiring schematic for the basic vehicle and its available optional equipment. Actual vehicle wiring may vary slightly depending upon optional equipment and/or local specifications. All information contained in this booklet is based on the latest information available at the time of printing. Mazda Motor Corporation reserves the right to make changes without previous notice

Mazda Motor Corporation HIROSHIMA, JAPAN

Name	Page
■ HOW TO USE THIS WIRING DIAGRAM	50-3
SYMBOLS IN THIS WIRING DIAGRAM	50-7
HOW TO READ ELECTRIC PARTS	50-8
# PARTS INDEX (ABBREVIATIONS)	50-10
■ POWER SYSTEM	50-10
■ ELECTRICAL WIRING SCHEMATIC	50-14
STARTING & CHARGING SYSTEM	50-14
■ E.G.I. & EMISSION CONTROL	30.10
& IGNITION SYSTEM	50-22
■ FUEL PUMP & SUB-ZERO STARTING ASSIST SYSTEM	50-34
COOLING FAN SYSTEM	50-38
■ METERS & WARNING SYSTEM	50-40
FRONT WIPER & WASHER	50-44
REAR WIPER & WASHER	50-46
■ HEADLIGHTS	50.48
RETRACTABLE HEADLIGHTS HEADLIGHT CLEANER ILLUMINATION LIGHTS	50-50
COMBINATION LIGHTS LICENSE LIGHTS STORAGE BOX LIGHT\$ GLOVE BOX LIGHT	50-54
■ STOP LIGHTS ■ HORN	50-58
TURN & HAZARD FLASHER LIGHTS BACK-UP LIGHTS	50-60
■ HEATER & AIR CONDITIONER	50-64
■ WARNING & AUTO CLOCK SYSTEM	50-70
CARGO ROOM LIGHT COURTESY LIGHTS INTERIOR & SPOT LIGHTS WARNING BUZZER OR CHIME DOOR LOCK CYLINDER & IGNITION KEY CYLINDER LIGHTS	50-74
■ POWER STEERING CONTROL SYSTEM	50-78
AUTO ADJUSTING SUSPENSION CONTROL SYSTEM	50-80
■ SLIDING SUNROOF	50-84
REAR WINDOW DEFROSTER	50-86
POWER WINDOW	50-88
■ REMOTE CONTROL MIRROR ■ CIGARETTE LIGHTER	50-90
■ CRUISE CONTROL SYSTEM	50-92
THEFT-DETERRENT SYSTEM	50-94
AUDIO SYSTEM POWER ANTENNA	50-96
■ POWER DOOR LOCK SYSTEM	50-102
ANTI-LOCK BRAKE SYSTEM	50-104
CONVERTIBLE TOP CONTROL SYSTEM	50-108
■ PARTS LOCATION	50-112
# FRONT HARNESS	50-114
■ ENGINE HARNESS	50-116
■ EMISSION HARNESS	50-117
■ INSTRUMENT PANEL HARNESS	50-118
■ REAR HARNESS	50-119
GROUND CIRCUIT	50-1120
(c) 1987 Marda Marer C	200120

SYSTEM NAME

SYSTEM PA	GE	SYSTEM	PA	GE
HOW TO USE THIS WIRING		WARNING & AUTO CLOCK		
DIAGRAM 50-	3	SYSTEM	50-	70
SYMBOLS IN THIS WIRING		CARGO ROOM LIGHT		
DIAGRAM 50-	7	COURTESY LIGHTS	50-	74
HOW TO READ ELECTRIC		INTERIOR & SPOT LIGHTS	50-	74
PARTS	8	WARNING BUZZER OR CHIME .	50-	74
PARTS INDEX		DOOR LOCK CYLINDER &		
(ABBREVIATIONS) 50-	10	IGNITION KEY CYLINDER		
POWER SYSTEM 50-	12	LIGHTS	50-	74
		POWER STEERING CONTROL		
ELECTRICAL WIRING SCHEMATIC50-	14	SYSTEM		78
STARTING & CHARGING		AUTO ADJUSTING SUSPENSIO		
STARTING & CHARGING SYSTEM50-	16	CONTROL SYSTEM [A.A.S.]	50-	80
E.G.I. & EMISSION CONTROL		SLIDING SUNROOF		
& IGNITION SYSTEM 50-	22	REAR WINDOW DEFROSTER		
FUEL PUMP & SUB-ZERO		POWER WINDOW	50-	88
STARTING ASSIST SYSTEM 50-	34	REMOTE CONTROL MIRROR		
COOLING FAN SYSTEM 50-	38	CIGARETTE LIGHTER		
METERS & WARNING SYSTEM 50-		CRUISE CONTROL SYSTEM .	50-	92
FRONT WIPER & WASHER 50-		THEFT-DETERRENT SYSTEM		
REAR WIPER & WASHER 50-		AUDIO SYSTEM	50-	96
HEADLIGHTS 50-	48	POWER ANTENNA	50 -	96
RETRACTABLE HEADLIGHT 50-		POWER DOOR LOCK SYSTEM.	50-	102
HEADLIGHT CLEANER 50-		ANTI-LOCK BRAKE SYSTEM		
ILLUMINATION LIGHTS 50-		[A.B.S.]		104
COMBINATION LIGHTS 50-		CONVERTIBLE TOP CONTROL		
LICENSE LIGHTS 50-	54	SYSTEM	50-	108
STORAGE BOX LIGHTS 50-		PARTS LOCATION	50-	112
GLOVE BOX LIGHT 50-	54	FRONT HARNESS	50-	114
STOP LIGHTS 50-	58	ENGINE HARNESS	50-	116
HORN 50-	58	EMISSION HARNESS	50-	11/
TURN & HAZARD FLASHER		INSTRUMENT PANEL HARNESS	50	118
LIGHTS 50-	60	REAR HARNESS		
BACK-UP LIGHTS 50-	60	GROUND CIRCUIT	50-	120
HEATER & AIR CONDITIONER . 50-	64			

The Way to View a Wiring Diagram


This Wiring Diagram is made up of circuit diagrams connector diagrams. location diagrams, and harness diagrams.

The circuit diagrams are divided according to each system, and by using them, the wiring of each system's circuit can be understood

Connector diagrams and location diagrams are divided according to vehicle harness, and the location diagrams are designed so that the connector locations and the circuit's course in the vehicle harnesses can be understood From the connector diagrams the connector shape and the arrangement of the pins used in the circuit diagrams can be understood.

In the circuit diagrams and the location diagrams, the different kinds of harnesses are colored differently, which makes easy distinguishing.

The harness diagrams on the last page can be understood to indicate the connector shape for each harness, the wiring color, and each part and each turning point in the vehicle.

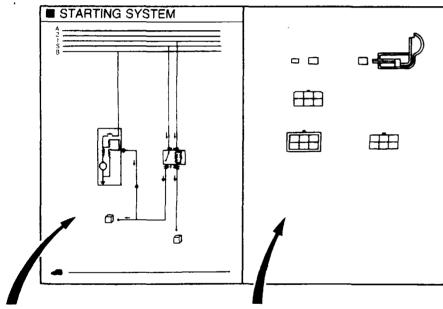


Circuit Diagram

Designed so that operation of electrical parts and the layout of the wiring may be understood.

Connector Diagram


Lists the connectors that are used in the circuit on the left page

As a rule it shows the connectors on the harness side.

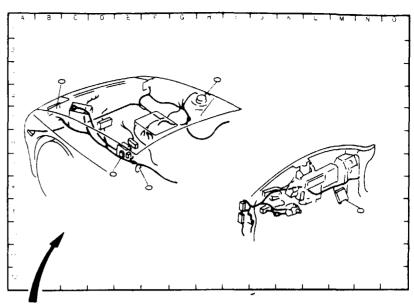

Location Diagram

This page illustrates the actual location of each connector and the routing diagram of the harness.

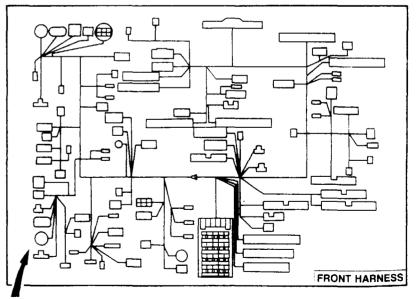

Harness Diagram


Indicate the connectors used in the circuit diagrams, arranging them according to each different, kind of harness.


TO USE THIS WIRING DIAGRAM

Overview of Power Source Diagrams and Ground Circuit Diagrams


The electrical power sources on the circuit are shown by designated code numbers. Therefore, by extending to the left the folding power source diagram, the power sources and fuse that are used be seen and understood at one glance.

Here are listed together the fuses that have been designated for use in the vehicle.

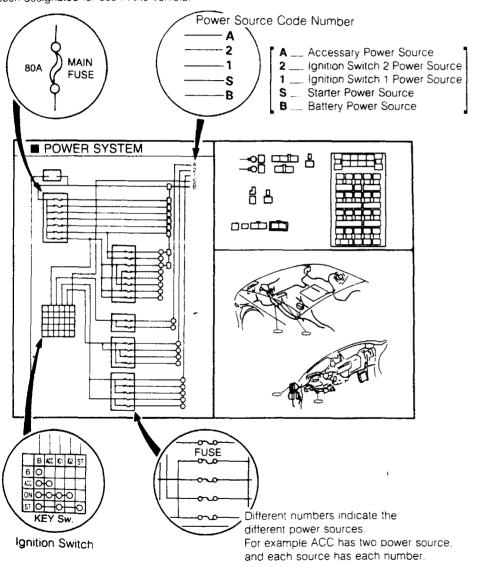


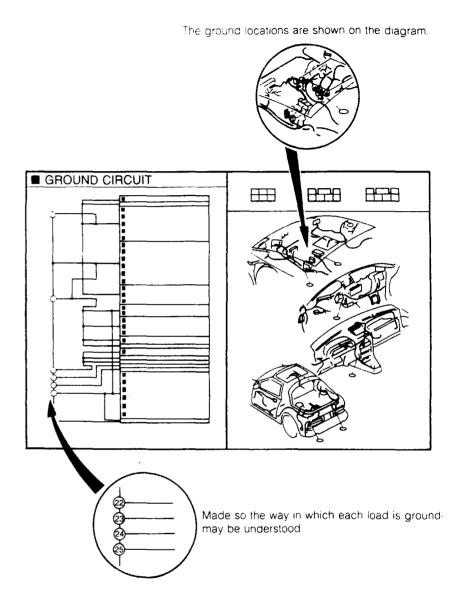

Some Points to Remember When Viewing a Harness Diagram

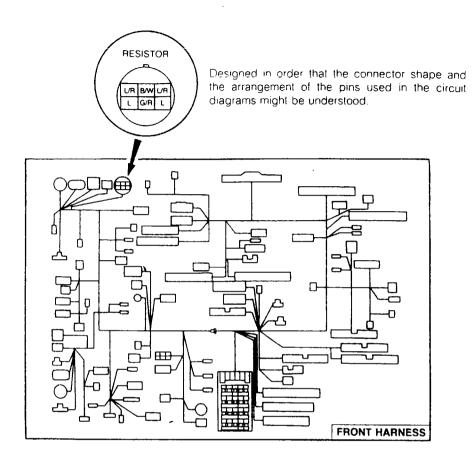


The way of looking at a connector

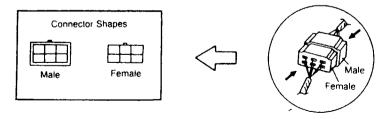


HARNESS SYMBOLS

Each harness is distinguished by a symbol to indicate to which harness belong a wiring and connector in circuit diagrams and connector charts.

DESCRIPTION OF HARNESS	COLOR	SYMBOL	DECRIPTION OF HARNESS	SYMBOL
Front harness		[F]	Interior light harness	[In]
Engine harness		(Ē)	Cluster switch harness (L.H.)	[Cr 1]
Instrument panel harness		[1]	Cluster switch harness (R.H.)	[Cr 2]
Rear harness	ابت	[R]	No. 1 Door harness	[Dr 1]
Emission harness		[EM]	No. 2 Door harness	[Dr 2]
Meter harness	,	[Me]	Air conditioner harness	[Ac 1]
Storage harness	,	[St]	Air conditioner harness	[Ac 2]
A.B.S. harness		[A]		•

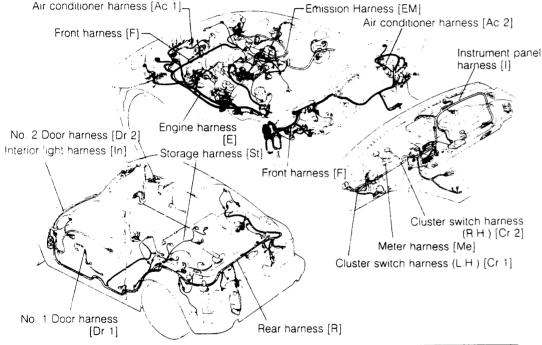


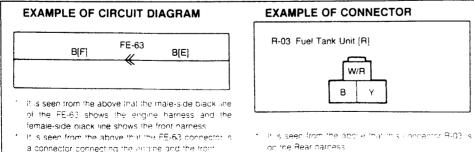


SYMBOLS IN THIS WIRING DIAGRAM

LOGICAL SYMBOLS

The logical symbols are of four kinds: OR, AND, INV. (Inverter), PROCESS. The circuit operation can be easily read by understanding these symbols.

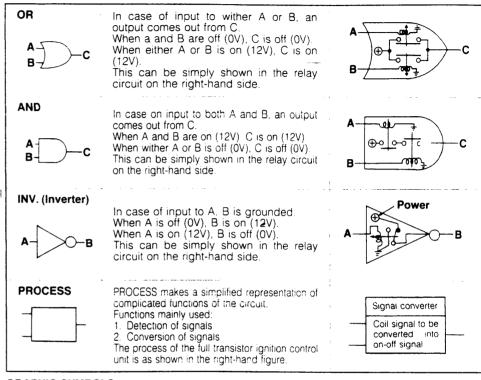

GRAPHIC SYMBOLS

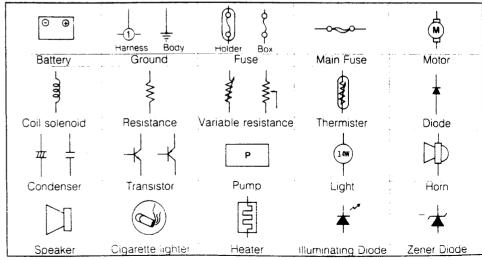

50 SYMBOLS IN THIS WIRING DIAGRAM


GRAPHIC SYMBOLS

GRAFIIC STM					
					F
Control Unit	Relay	Switch	Injector	Meter	Inhibitor Switch
	0			@	<i>10∶10</i>
Door Switch	Combination Switch	Air Conditioner	Solenoid Valve	Panel Light Control Switch	Auto Clock
	<u> </u>	₩			
Alternator	Boost Switch	Ignition Coil	Blower Motor Switch	Electric Fan Motor	Starting Motor
R				©	†
Parking Brake Switch	Magnet Clutch	Power Steering Arigle Sensor	Radio	Tail Light Switch	: Water Temp Switch
	M	POP			
A.A.S.	Power Antenna	Stop Light Switch			
		%			
Warning Light	Charge	Cooling Fan	Fuel	Coolant	High Beam Rear Fog
			الميكرا		•
Hazard	Stop Light	Battery Electrolyte Low Level	Oil	Seat Belt	Sedimentor

50 HOW TO READ ELECTRIC PARTS

AN OVERVIEW OF ELECTRICAL COMPONENTS

Following is an overview of electrical components representative of the many electrical components related to the control and warning instruments in automobiles.




The nature of diode is to allow a current to flow in only one direction. It is used in a circuit when desiring to let current flow in only one direction, or as a rectifier when changing an alternating current to a direct current.

The different terminals of a diode are called anode (A) and cathode (K). Electric current flows from anode to cathode, but never from cathode to anode.

In checking a diode with a tester be careful about the tester's polarity. The tester's (-) means positive electrical potential, and (+) means negative electrical potential. To check a diode's current, Touch the tester's (-) lead to the anode, and the tester's (+) lead to the cathode.


ILLUMINATING DIODE



An illuminating diode emits light from the contact surface of a semiconductor when an electric current flows in its forward direction.

In setting the two battery in tester for the $10k\Omega$ range, touch the tester's (-) lead to the anode (A), and the (+) lead to the cathode (K), it lights up.

RESISTOR




Color Band	No. 1	No. 2	No. 3	No. 4
Color	Value	Value	Multiplier	Clearance
Black	0	0	×10°	
Brown	1	1	×10	
Red	2	2	×10 ²	
Orange	3	3	×10 ^J	
Yellow	4	4	×10 ⁴	
Green	5	5	×10 ⁵	·
Blue	6	6	×10 ⁶	
Purple	7	7	×10 ⁷	<u>:</u>
Gray	8	8	×10 ⁸	1
White	9	9	× 10°	
Gold			×10 '	±5%
Silver	!		×10 ⁻²	±10%
Non				±20%

330

As resistors are essential to make an electric circuit. Reading the resistance value of the widely used resistor is explained below

As shown in the chart at left, there are four color bands to represent resistances. Each resistance value can be understood from each color band For example:



The resistance value is 200kΩ ±5%

Code number clarification

The first two digits in each code number represent the resistance value, and the third digit represents multiplier.

 \rightarrow 3.3k Ω (33×10²) For example:




 \rightarrow 33 Ω

→ 3.3M
$$\Omega$$
 (33×10⁵) 332 → 33×10²(Ω) → 3.3×10³(Ω) → 3.3(k Ω)

CONDENSER

330



A Condenser is for storing electricity.


In the case of an open circuit, a condenser is not able to store electric charge. And the circuit remains in an open state.

A short circuit, its name indicate, means the break-down phenomena when voltage is applied.


Inspection of low voltage condenser with circuit tester


- (1) Short a condenser and discharge the remaining electric charge
- (2) Set $\times 10$ k Ω , largest resistance range in the circuit tester
- (3) When the test lead touches both ends, the indicate moves a little bit and then returns to ~ (Ω)

TRANSISTOR



Electrodes indication





- Current Flow only C to B
- Current Flow only E to B
- Current Flow only B to E

only B to C

There are two types of transistor function:

- (1) Switching Acting a switch
- (2) Amplification action Amplifying a small signal to a big signal

Transistors are classified according to polarity (structure):


NPN and PNP

Generally, the NPN are widely used.

Transistor has three terminals: Emitter (E), Collector (C), and Base (B).

To operate the transistor, make a base current flow to the arrow direction (B to E). Then the resistance between the collector and the emitter becomes extremely small, and large current flows from the collector to the emitter (In the case of PNP transistor, electric current flows to th emitter to the collector).

Name of Models

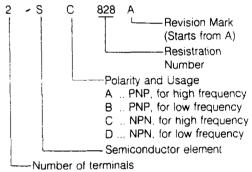

A simply way of checking

PNP and NPN transistor can be symplified shown in diagrams on the left-hand side.

Set $\times 100\Omega$ or $1k\Omega$, resistance measurement range in the circuit tester, and touch leads to each electrode to check conductivity

ABBREVIATIONS


ABBREVIATIONS USED IN THIS BOOKLET


A.	Ampere	HI.	High
A.A.S.	Auto Adjusting Suspension	IS.C.	Idle Speed Control
A.B.S.	Anti-lock Brake System	iG.	Ignition
A.C.V	Air Control Volum	ILLUMI.	Illumination
	Air Control Valve	INT	. –
A.E.	Acoustic Equilibration		Intermittent
A.I.S.	Air Injection System	J.B.	Joint Box
A.S.	Auto Stop	L.H.	Left Hand
A.S.V.	Air Supply Valve	LCD.	Liquid Crystal Display
A/C	Air Conditioner	LO.	Low
A/F	Air Fuel	LW	Low Wave
A/R	Auto Reverse	M.	Motor
A/T	Automatic Transmission	M.I.L.	Mulfanction Indicator Light
ACC.	Accessory	M.T.R.	Mechanical Tuning Radio
	Accelerator	M/T	Manual Transmission
ADD.	Additional	MI	Middle
		MIN.	
ALT.	Alternator		Minute
AM	Amplitude Modulation	MIX.	Mixture
AMP.	Amplifier	MPX.	Multiplex
ANT.	Antenna	MTX	Manual Transaxle
ATP.	Atmospheric Pressure	MW	Middle Wave
ATX.	Automatic Transaxle	NC	Normatly Closed
B.	Battery	NO	Normally Open
B.A.C	By-pass Air Control Valve	O.D.	Over Drive
B/L	Bi-Level	P.	Power
C.P.U.	Central Processing Unit		Pressure Regulator Control
C.S.D	Cold Start Device		Solenoid Valve
CARB	Carburator	PTC	Positive Temperature
CCT.	Circuit	0	Coefficient Heater
CIGAR.		P/S	Power Steering
	Cigarette	PRG.	Purge Solenoid Valve
	Combination	-	
CON.	Conditioner	Q.S.S.	Quick Start System
CONT.	Control	R	Rear
D.O.H.C.	Double Over Head Camshaft	R.H.	Right Hand
DEF	Defroster	R.L	Rear Left
E.C.E.	Economic Commission For Europe	RPM	Revolution Per Minute
E.G.I	Electric Gasoline Injection	RR	Rear Right
EGR	Exhaust Gas Recirculation	REC	Recirculation
EGRP.	Exhaust Gas Recirculation	SOL	Solenoid
	Pressure Sensor	SQ.	Square Per Milimeter
E L.R.	Emergency Locking Retructor	ST.	Start
ELEC.	Electric	SW	Short Wave
ETR	Electronic Tuner	SW.	Switch
EXH.	Exhaust	T C.V	Twin Scrol Turbocharger
F.	Front	. 0.0	Solenoid Valve
FICB	Fast Idle Cam Breaker	T I.C.S	Triple Induction Control System
		TEMP	Temperature
F.L.	Front Left	TR.	Transistor
F.R	Front Right	V .	
F/B	Feed Back	-	Volt
F/I	Fuel Injector	V R.I.S.	Variable Resonance Induction
FM	Frequency Modulation	VENT	System
GEN	Generator	VENT	Ventiration
H.E.I	High Energy Ignition	VOL	Volume
H/D	Heat/Defroster	W-	Watt
HEAT	Heater		


PARTS	PAGE	PARTS PAC
A A S control switch	50-80	Convertible top motor
AAS control switch illumination light	50-80	Convertible top switch: 50-1
A A.S. control unit	5ŭ-80	Courtesy lights 50-
A.B.S control unit	50-104-	Coolant level sensor 50-
A.B.S. hydraulic unit	. 50-104	Coolant level unit 50-
A B S. sensor	50-104	Crank angle sensor
Accelerator switch	50-80	Cruise control switch 50-
Actuator	. 50-80.92	Cruise control unit 50-
ADD coolant warning light	50-70	1
Additional horn	50-94	Dimmer relay
Air by-pass relay		Dimmer switch
Air by-pass solenoid valve		Diode 50–18 25, 38
Air con. main relay		Door lock cylinder light 50-
Air flow meter		Door switch
Air mix motor		Door handle switch 50-
Air supply vaive (ASV)		Door lock link switch 50-
Anti-lock warning light		Door key cylinder switch 50-
ALT warning light relay		Door speaker
Alternator		Door warning light
Atmospheric pressure sensor (ATP)		Door woofer amp 50–96.
Auto clock		2007 Wooler amp
		E G R solenoid valve 50-25,
Back-up lights	50-60	Electrical fan sub relay 50-
Back-up light switch	50-60	Electrical fan relay 50-
Battery	50-12	Electronic control switch
Belt warning light	50-70	Emission control unit 50-22 25 28
Blower resistor	. 50-64.67	EX-HI relay
Blower motor	50-64 67	
Blower unit	50-64 67	Fan amp
Boost gauge	50-40	Front parking lights
Boost sensor	50-31	Front side marker light 50-
Brake pressure switch	50-80	Front speaker 50-96
Brake warning light	. 50-70	Front washer motor 50-
Brake fluid level sensor		Front washer switch 50-
Buzzer	50-108	Front wiper motor 50-
By-pass air control valve (BAC)		Front wiper switch 50-
b) padd an dermen rann (erre)	00 20.0	Fuel gauge 50-
Cargo room light	. 50-74	Fuel pump 50–34
Central processing unit.	50 - 74	Fuei pump circuit terminal 50–25
Check connector 50 – 22 28		Fuel pump relay & fuel pump resistor
Charge warning light		
Cigarette lighter		Fuel warning light 50-
Circuit openning relay		Fuse
Clutch switch	50-92	Charles to the control of the contro
Coil with igniter (T)	50-22 28	Glove box light 50-
Coil with igniter (L).		Glove box light switch 50-
Compact disc player	50-96 99	
Coolant level sensor		Hazard switch 50-
Coolant level unit .	50-40	Hazard & flasher unit . 50-
Cooling fan motor	. 50-38	Hatchback door switch 50-
Cooling fan control unit	50-38	Hatchback warning light 50-
Cooling fan indicator light	50-40	Headlight 50-
Cooling fan warning light	50-70	Headiight relay 50-
Combination meter	50-40	Headlight cleaner switch . 50-

PARTS	PAGE	PARTS PAG	ЗE
Headrest speaker box	50-99	Over drive indicator 50-	18
Heater relay 50-	64 67	Over drive oil pressure switch	
Headlight cleaner motor	50-50	Overheat warning light 50-	
Heat hazard switch 50-	-22 28	Over top switch	
High mounted stop light	50-58	30 20.	
High beam		Panel light control 50-	50
	50-94	Parking brake switch 50-	
	50 - 58	Port air solenoid valve	
Horn relay		Power antenna relay 50–96	
Horn switch		Power door lock motor	
		Power door lock relay 50 – 1	
IG relay	50-67	Power door lock switch 50–11	02
Ignition key cylinder light			
Ignition key reminder switch			
Ignition switch		Power steering relay 50 –	
Inhibitor switch 50–		Power steering switch	
Injector 50–		Power transistor 50–64.	
•		Power window motor	
	25, 31	Power window switch 50-	
Interior light		Power window main switch	
Inter lock switch		Pressure gauge	
Intermittent wiper relay	44, 46	Pressure sensor	25
Illumination light		Pressure regulator control solenoid valve	
Cigarette		(PRCV) 50 – 25	31
Meter !		_	
Turn		Radio 50–96.	
	50-60	Rear hatch key cylinder switch 50-	94
•	50-44	Rear side marker lights 50-	
Cruise		Rear speaker 50-96.	99
Rear wiper & washer	50-46	Rear washer motor 50-	46
		Rear wiper motor 50-	_
	50-18	Rear wiper switch 50-	46
Kick down switch	50-18	Rear washer switch	46
Knock control unit	50~25	Rear window defroster relay50+	86
Knock sensor	50-25	Rear window defroster switch	86
		Rear window defroster 50-	86
License lights	50-45	Rec-fresh select motor 50-64.	67
Light switch	50-50	Relief solenoid vaive 50-25.	31
Lock-up relay	50-18	Refrigerant pressure switch. 50-64.	67
Lock-up solenoid	50 – 18	Remate control mirror	90
		Remote control mirror switch 50-	
Main fuse	50-12	Retractable headlight motor	50
Magnet clutch 50-	64, 67		
	22, 28	Seat belt switch	74
Mode control motor 50-		Security indicator light	
Mode control switch 50-		Shift indicator light	
		Sliding sunroof switch 50-	
Neutral switch 50-	22 28	Sliding sunroof motor	
		Speed sensor 50~	
Oil level sensor	50-71	Split air solenoid valve 50–25.	
Oil pressure gauge unit		Spot light 50–	
Oil pressure gauge			
_	50-40 50-70	•	
9 ,		Starting motor	
O ₂ sensor 50-		Stepping motor	
	50 – 18	Stop light	
Over drive control switch	ວບ−18	Stop light switch	ъ8

PARTS	PAGE	PARTS PAGE
Stop light warning light		Turn switch
Stop light warning relay	50-58	Twin scroll turbocharger solenoid valve (TCV) 50-25
Storage box light	50-54	Vacuum switch
Storage box light switch	50-54	Variable reisstor 50-25, 31
Sub-zero motor	50-34 36	Volt gauge 50-40
Sub-zero sensor	50-34.36	
Sunroot relay	. 50-84	Warning & auto clock unit 50-71
Switching solenoid valve	. 50-25 31	Washer fluid level sensor 50-71
		Water temp_switch 50-22, 28, 38
Tachometer	50-40	Water temp. gauge unit
Tail lights	. 50-54	Water thermo sensor 50 +25, 31
Theft-deterrent control unit	50-94	Washer warning light
Thermostat	. 50-64-67	
Throttle sensor	. 50-25 31	20000 Miles switch 50-40
Temp. gauge	50-40	. 4AT control unit 50–18
Turn cancel sensor		4AT relay 50-18
Turn & nazard flasher light	50-60	4-3 switch 50-18
Turn indicator light		•

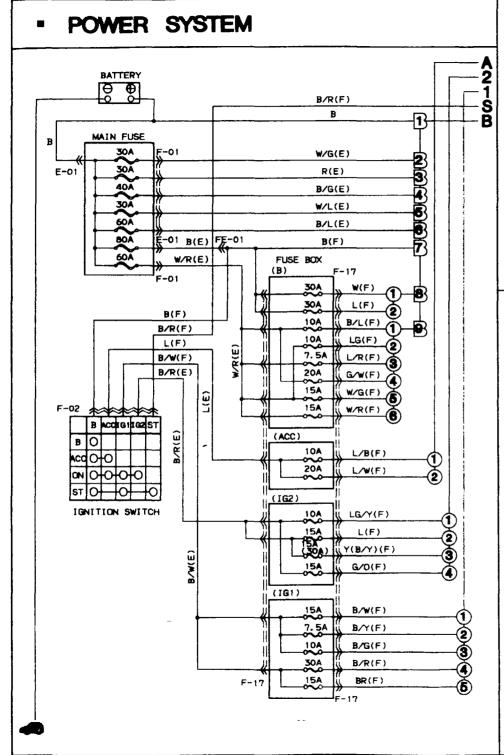

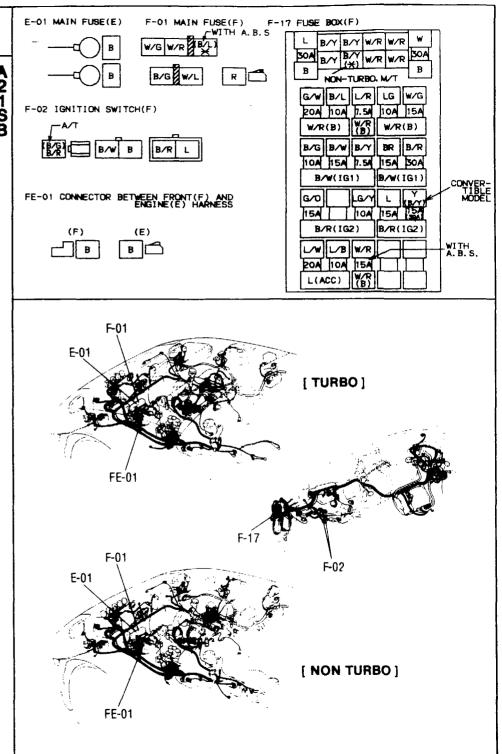

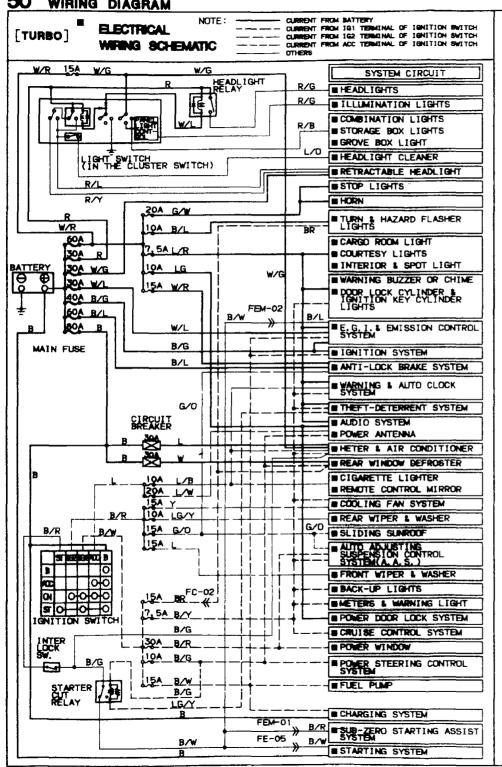

FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(FM) HARNESS

	(F)										
L/R	L/W	B/R		B/R	G	G/Y					
./	B/L	G/B	В	Y/B	G/B	G/W					
	\dashv										

	G/\	/ G	E	3/R		B/R	BR/R	L/R	L/W
ļ	G/V	V G/	ВΝ	//W	В	G/B	В	L/Y	L

/ C / A

FEM-02 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM) HARNESS

(F) 									
_G/B	B/W	L/R		G/R	B/Y	BR/R			
BR/Y	B/W	B/W	BR	LG	B/Y	B/L			
			===	===					

B/R	B/Y	B/R		W/L	B/W	LG/B
w	B/Y	LG	BR	B/L	B/W	BR/Y

FC-02 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR1) HARNESS


(F) G/B G/R R/B R/L W/G W/L R/G X R/G L/0 R/Y BR

						<u> </u>			
	B/G	R/G	R/W	W/G		R/L	R/B	G∕R	G/W
	B/L	R/Y	B/R	R	R/Y	L/O	R/G	ð	В
١.									

FE-05 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E) HARNESS





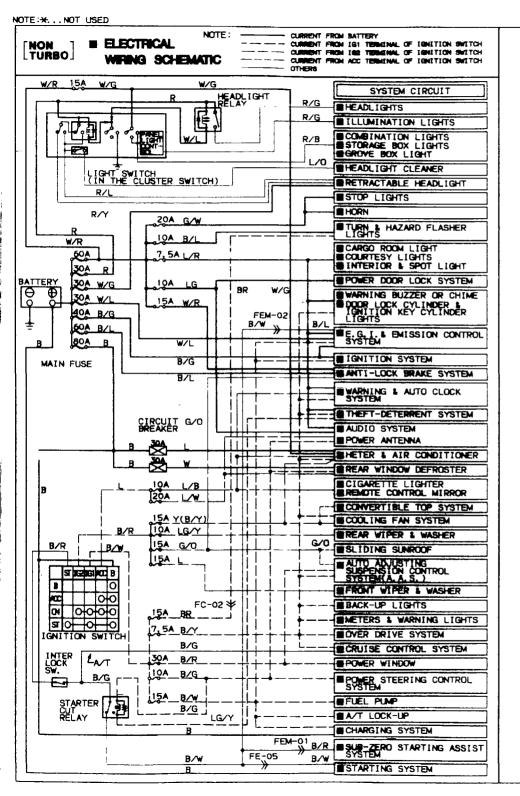

FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM) HARNESS

				.5. .)			
L/W	L/R	L/W	B/R		(B/W) B/R	G	G/Y
L	L/Y	W/B	*	В	*	G/B	G∕W

			``	PM /			
G/Y	G	B/R		B/R	B∕W	L/R	L/W
G∕ w	G/B	*	В	*	W/B	L/Y	L


FEM-02 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM) HARNESS

(F)									
Y/B	B/W	L/R		B/W	В/Ү	BR/R			
BR/Y	B/W	8/R	BR	*	B/Y	G∕B			

B/R	B/Y	B/R		W/L	B/W	Y/W
G/B	B/Y	*	BR	8 /L	B/W	BR/Y


(EM)


FC-02 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR1) HARNESS





,					اكـــــــــــــــــــــــــــــــــــــ	, L			
-	B/G	R⊿G	R/W	W/G		R/L	R/B	G∕R	G⁄₩
ı	B/L	R/Y	B/R	R	R/Y	L/0	R/G	G∕Y	В

FE-05 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E) HARNESS







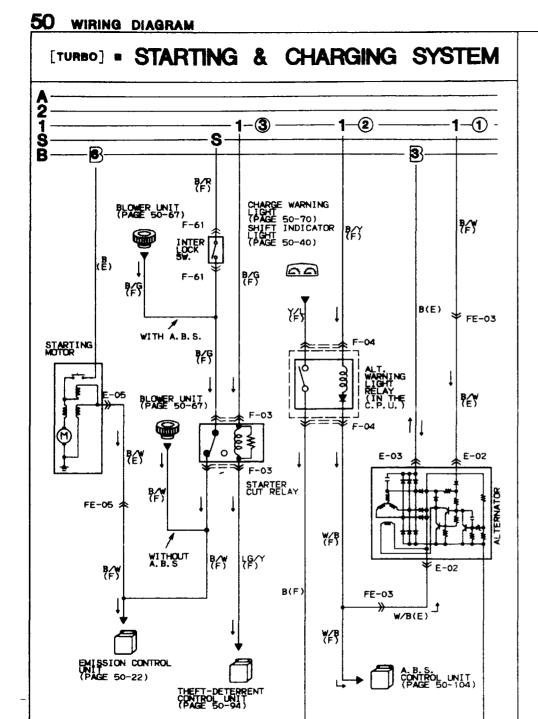

E-02 ALTERNATOR(E) --

E-03 ALTERNATOR(E)





E-05 STARTING MOTOR(E)

F-03 STARTER CUT RELAY(F)







F-61 INTER LOCK SWITCH(F)



F-04 ALT. WARNING LIGHT RELAY(F)

G∕R	G/0	G∕₩	W/B		Y/L	B/Y	L/R	Υ
×	×	R/W	L	В	الا∕يا	Y/R	G.∕B	G/W

FE-03 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E) HARNESS








FE-02 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E) HARNESS






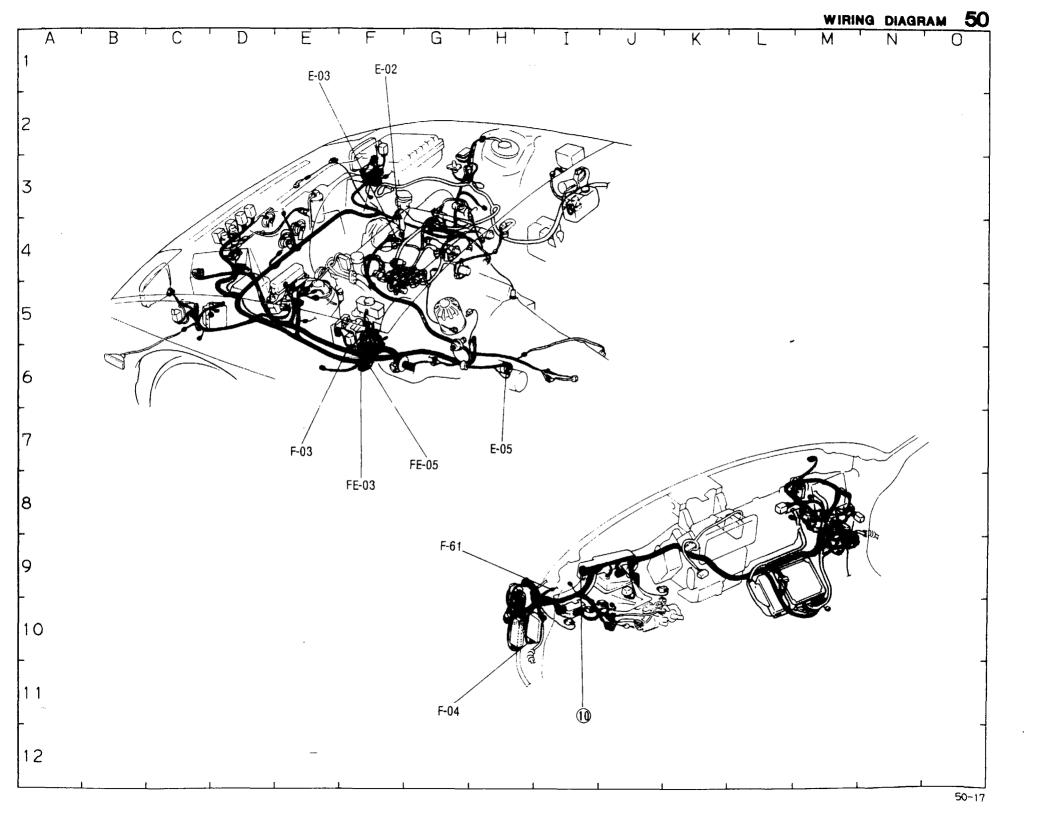


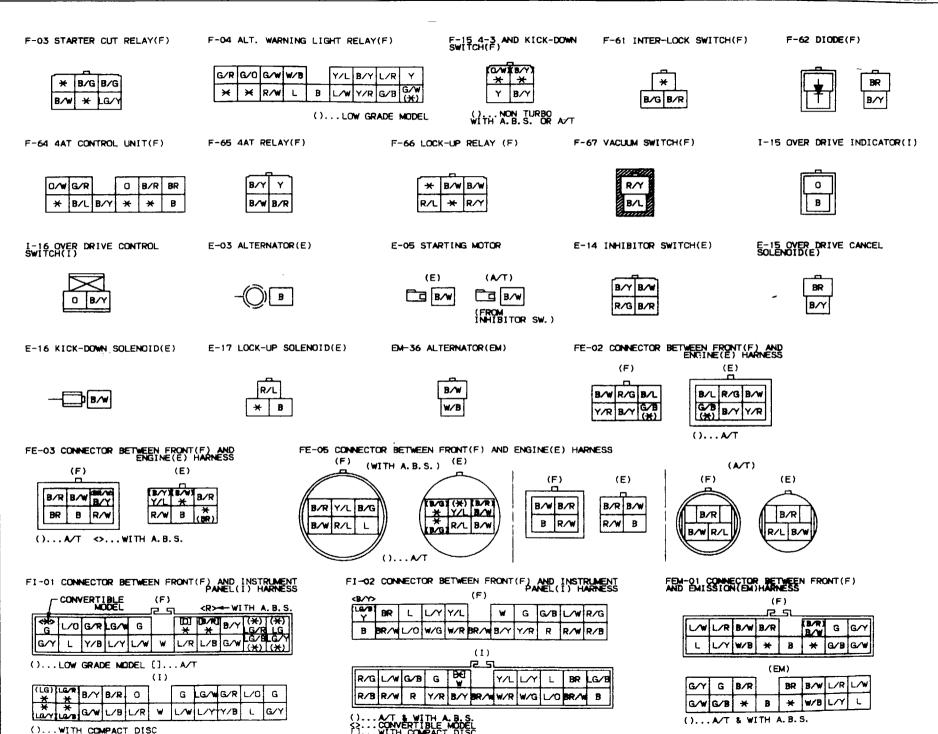


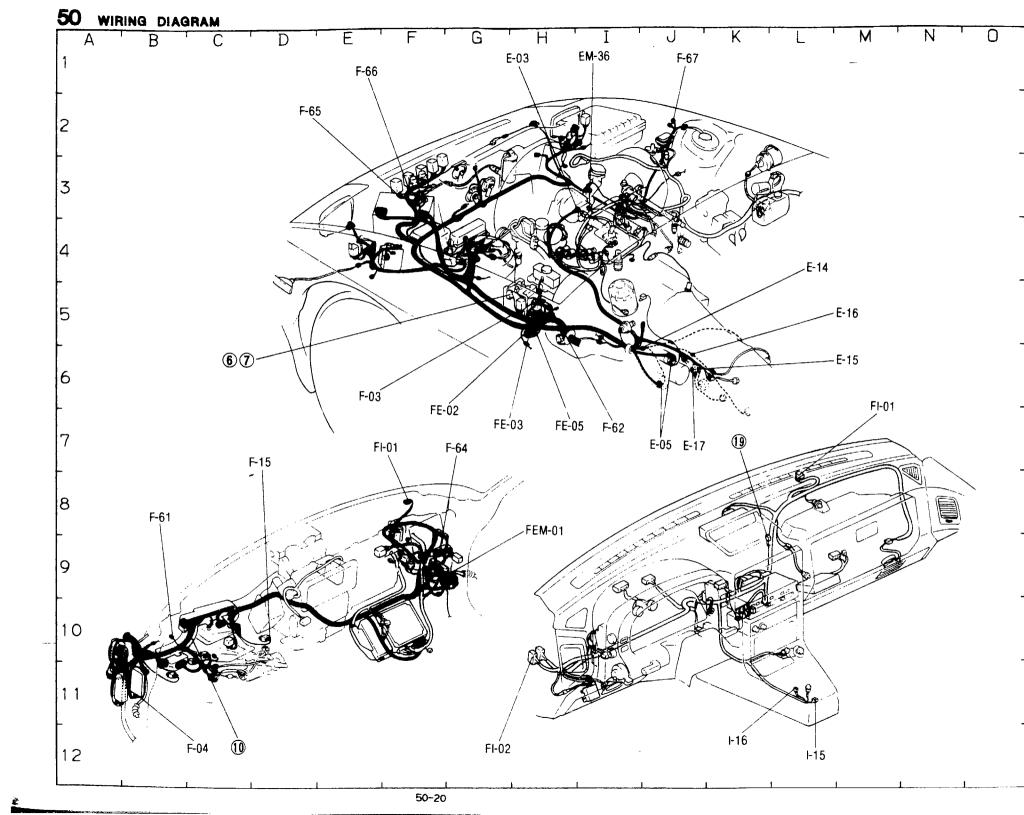



[TURBO] = E.G.I.& EMISSION CONTROL & IGNITION SYSTEM

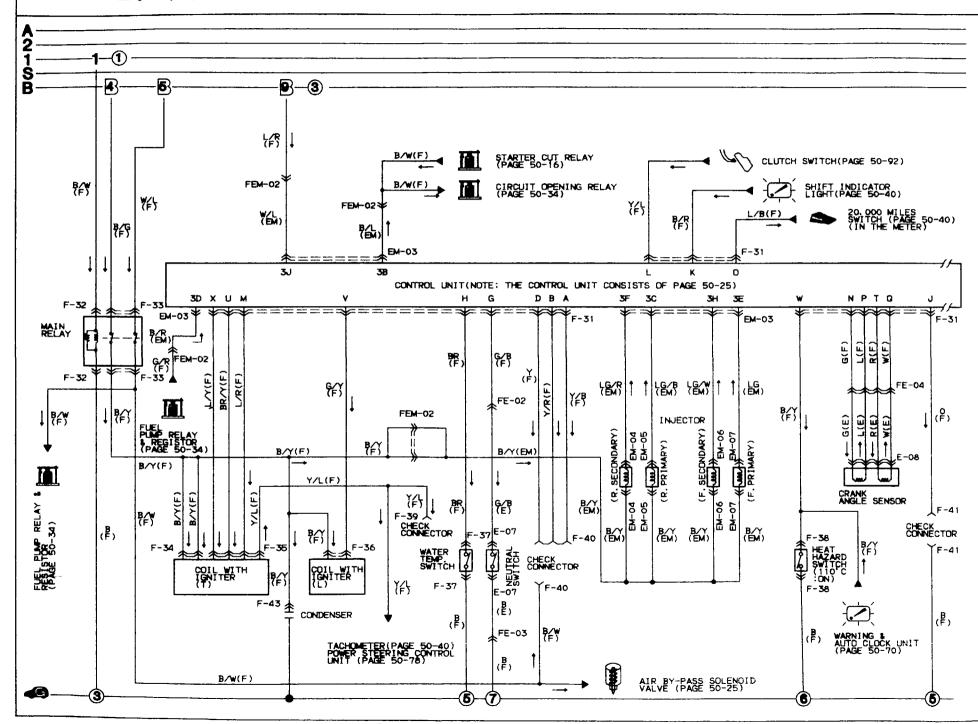


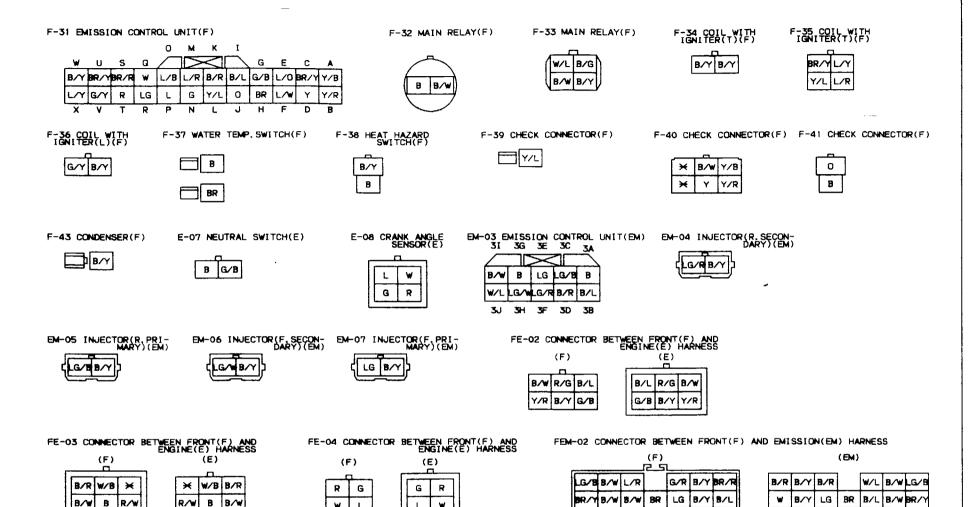

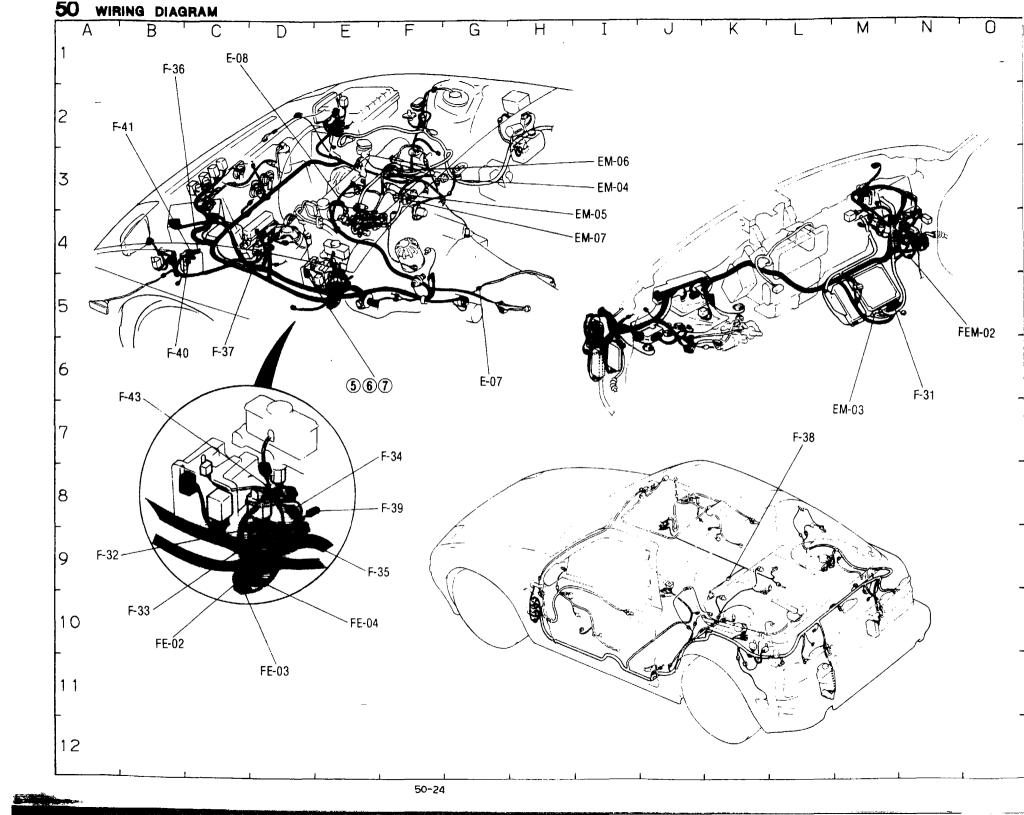


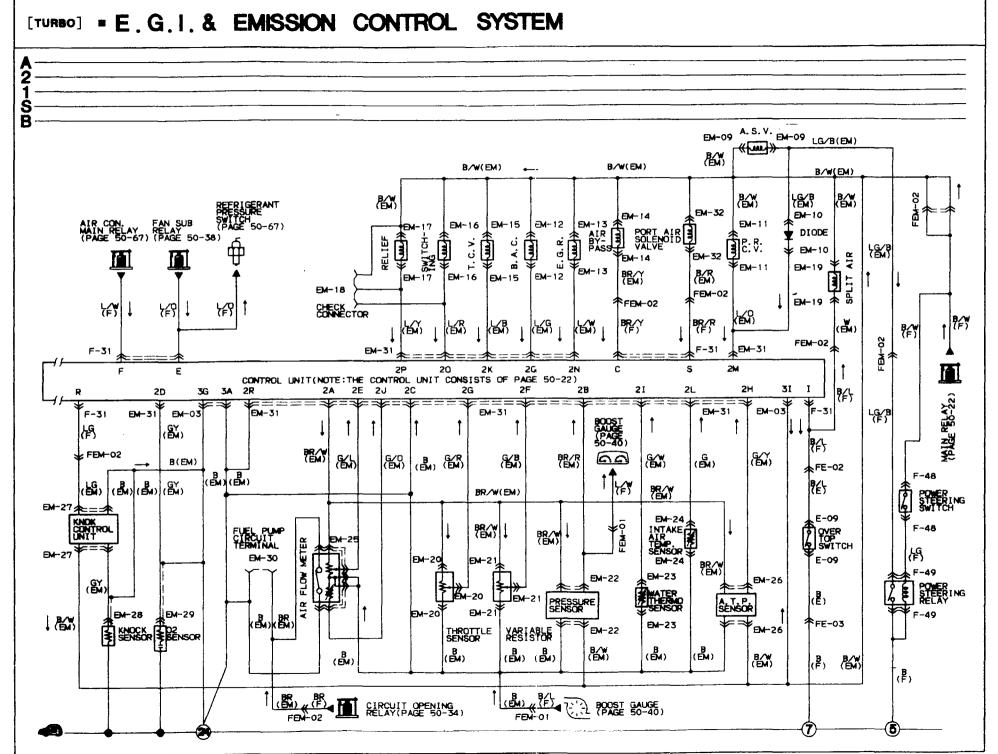


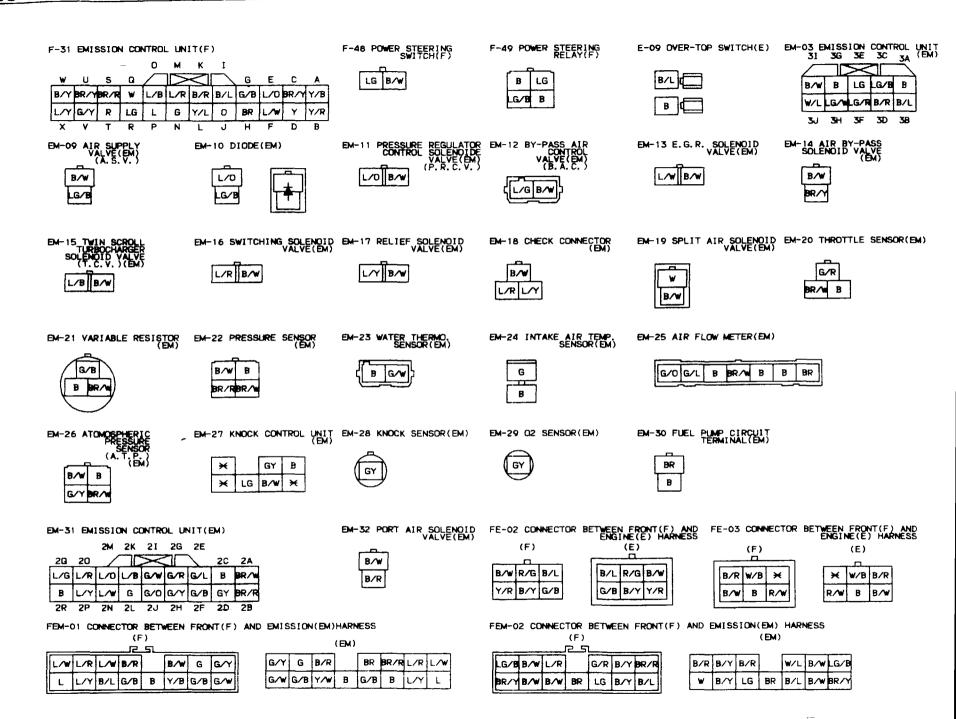


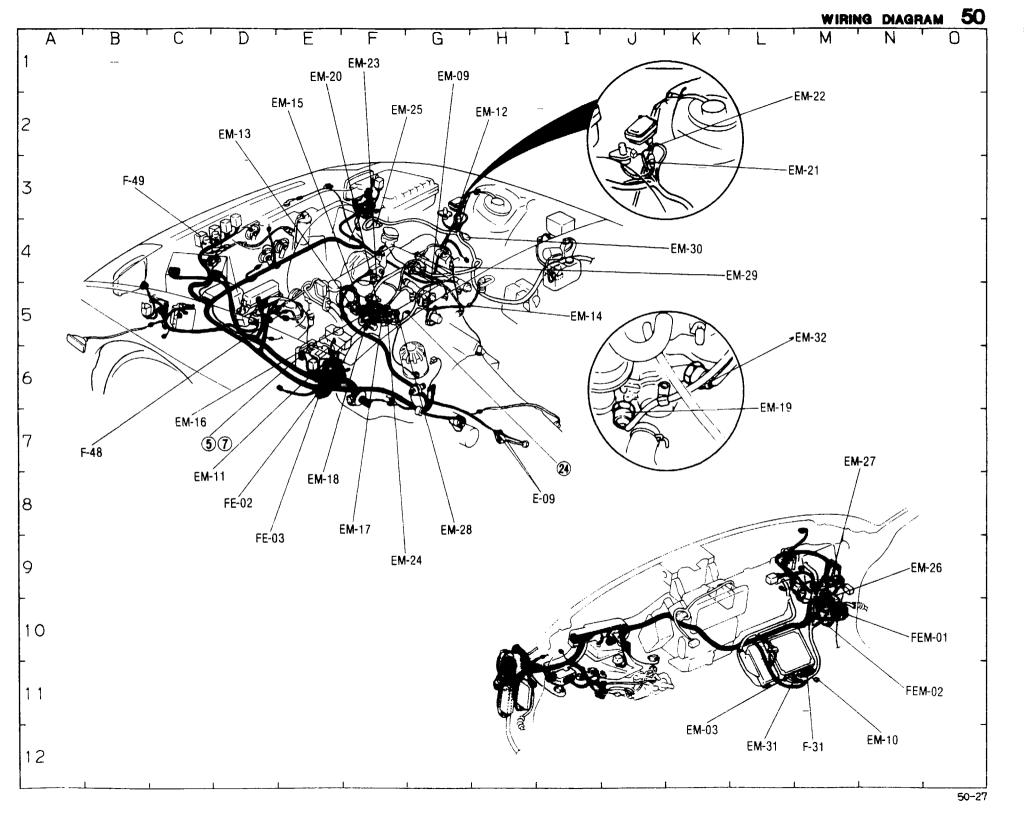



[NON PURBO] - E.G.I. & EMISSION CONTROL & IGNITION SYSTEM

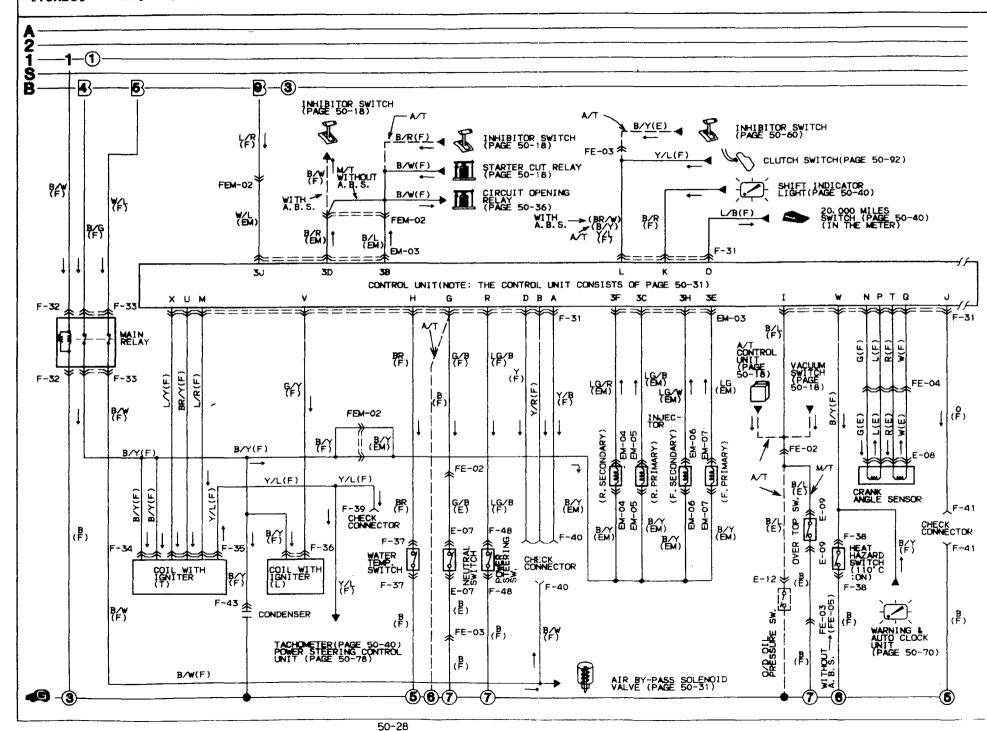


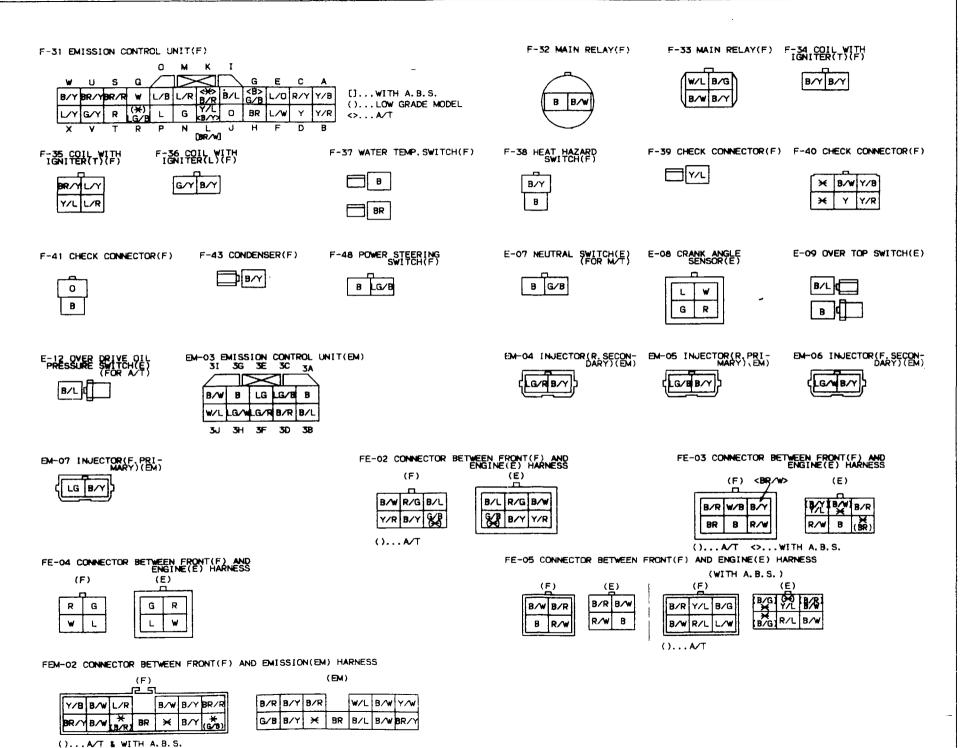


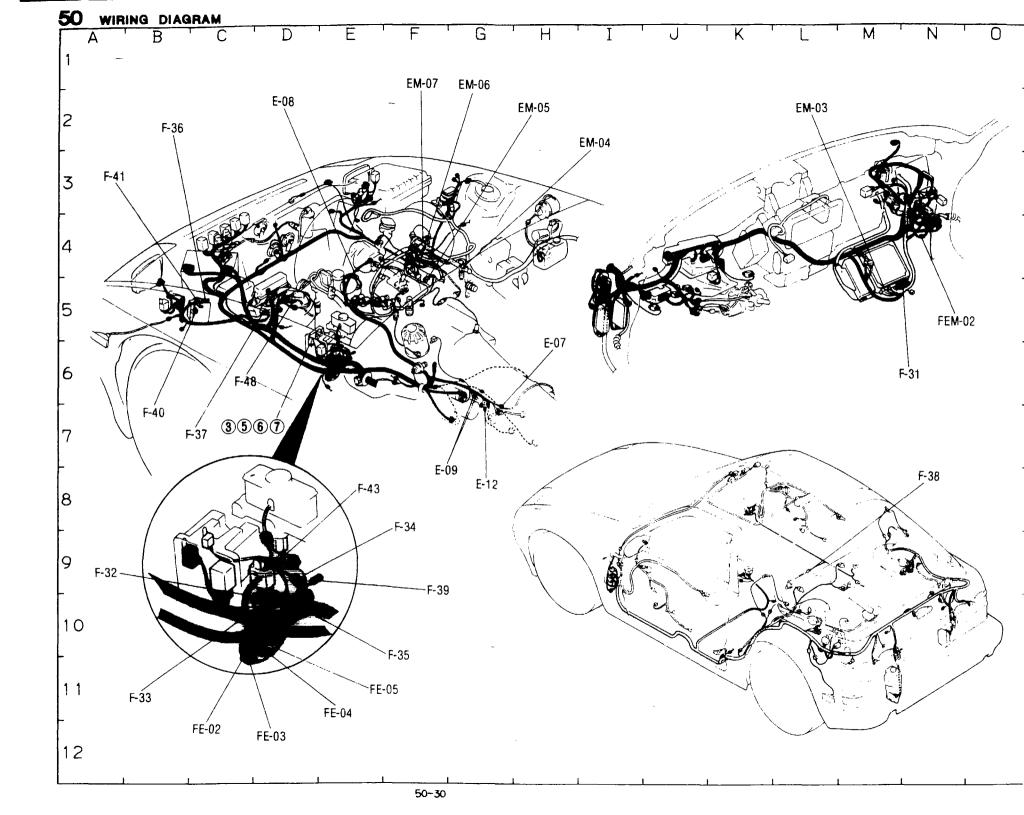

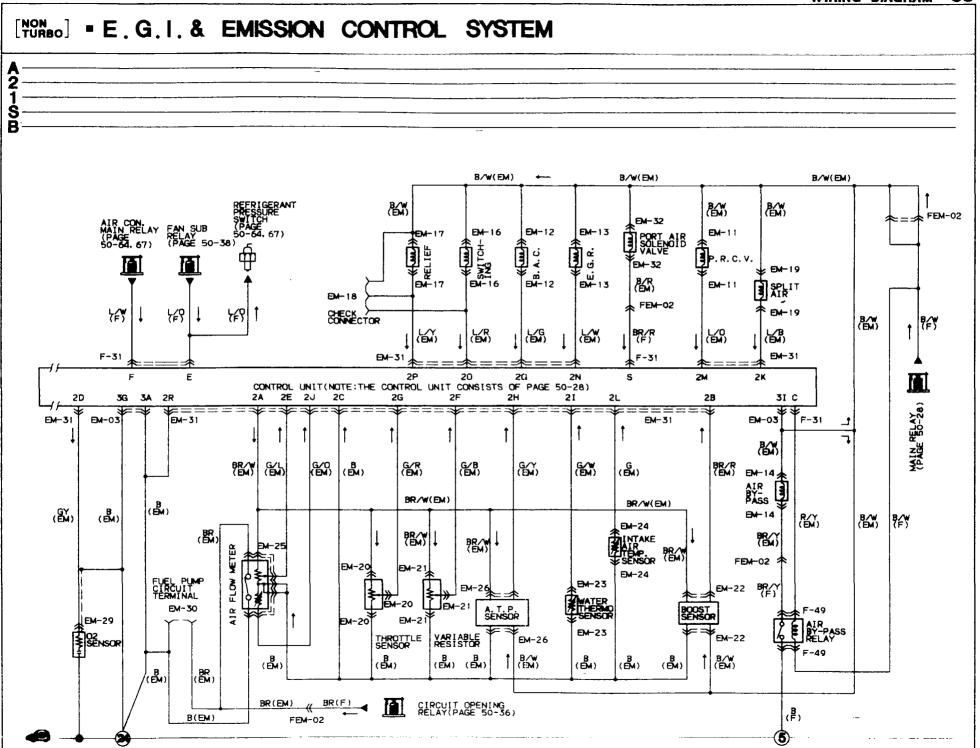

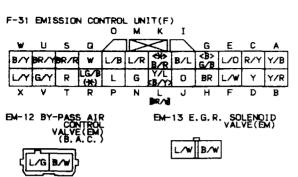


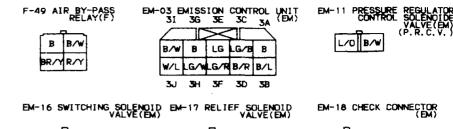

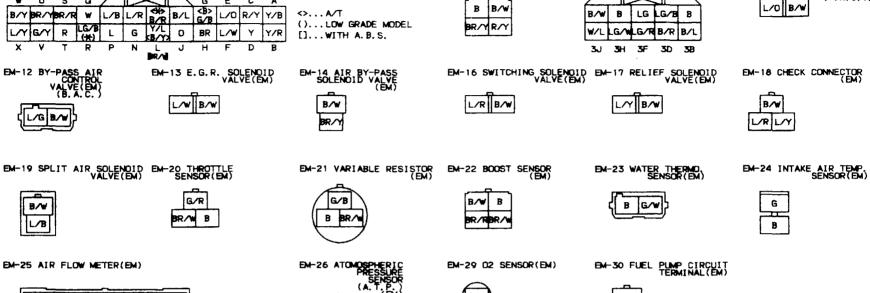






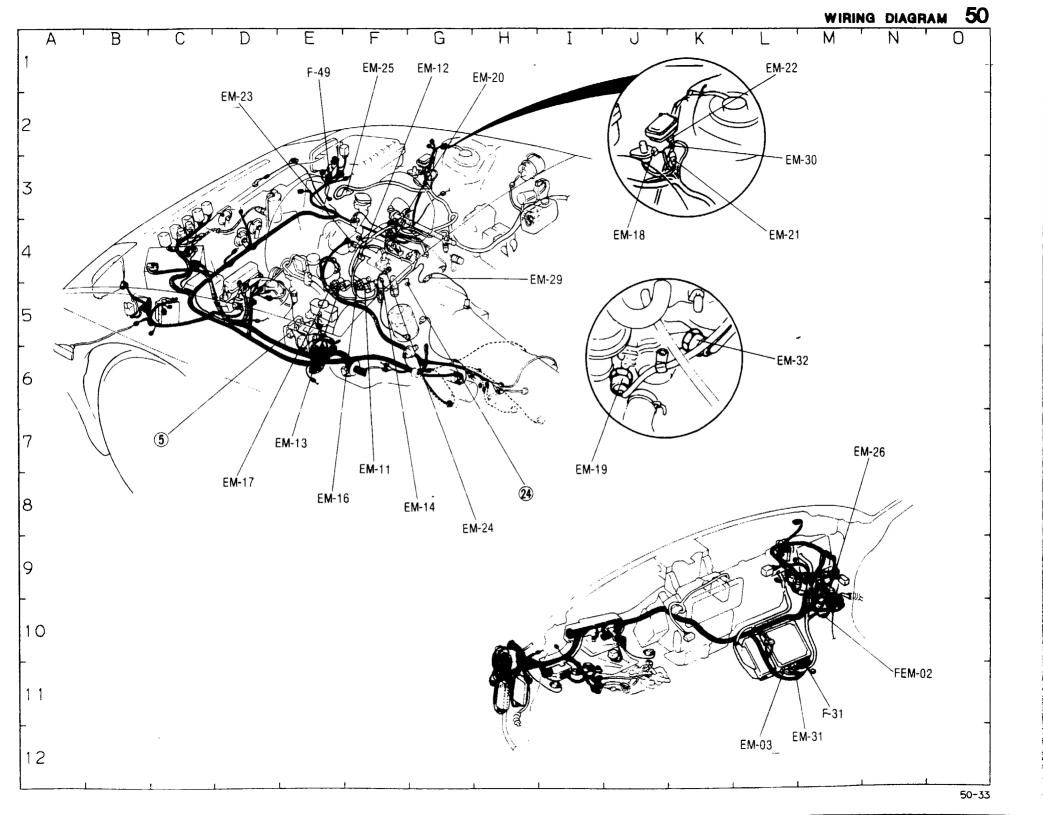



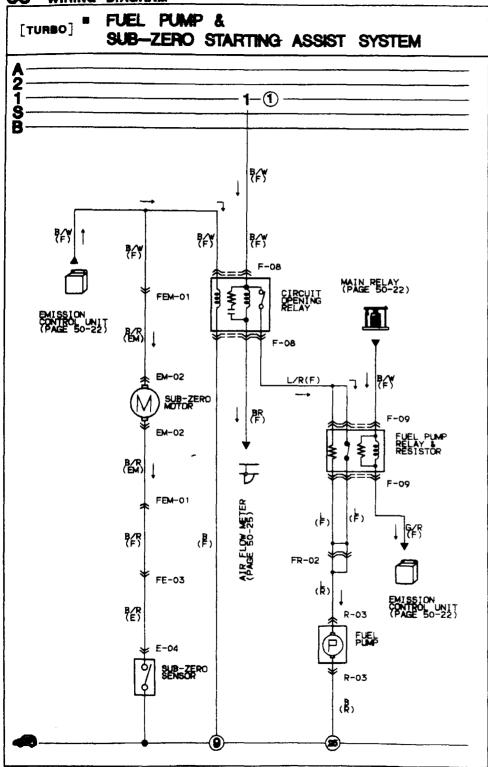

F-08 CIRCUIT OPENING RELAY(F)

F-09 FUEL PUMP RELAY & RESISTOR(F)





E-04 SUB-ZERO SENSOR(E)

R-03 FUEL PUMP(R)





EM-02 SUB-ZERO MOTOR (EM)


FE-03 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E)HARNESS








FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS



(R)


G	G/W	R/B	L/R		W/G	L/W	L/B	LG/Y
В	G/B	R/G	G	W/R	L	L	L/W	B/R


FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM) HARNESS




(EM)

G/Y	G	B/R		B/R	BR/R	L/R	L/W
G/W	G/B	Y/W	В	G/B	В	L/Y	L

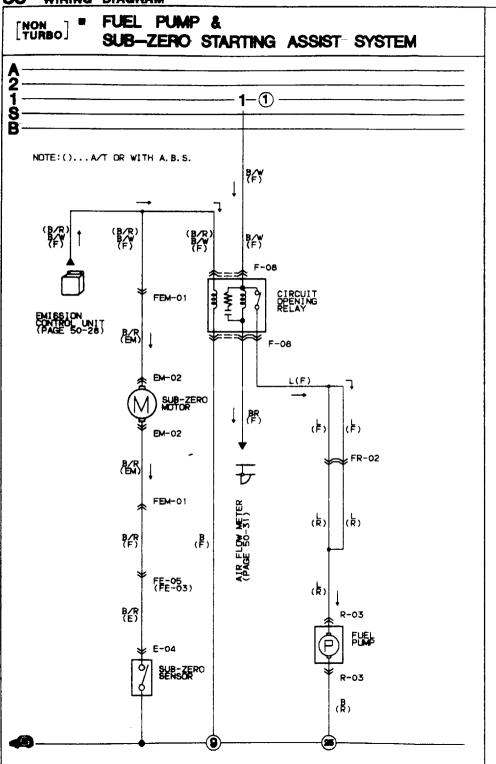







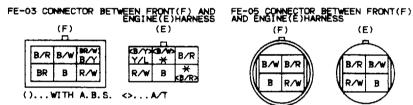


FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS

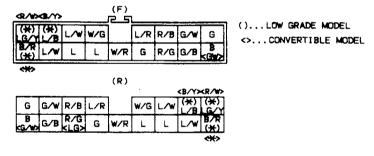

FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM) HARNESS

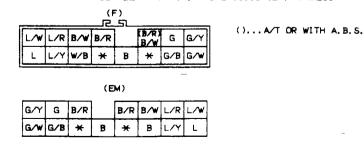

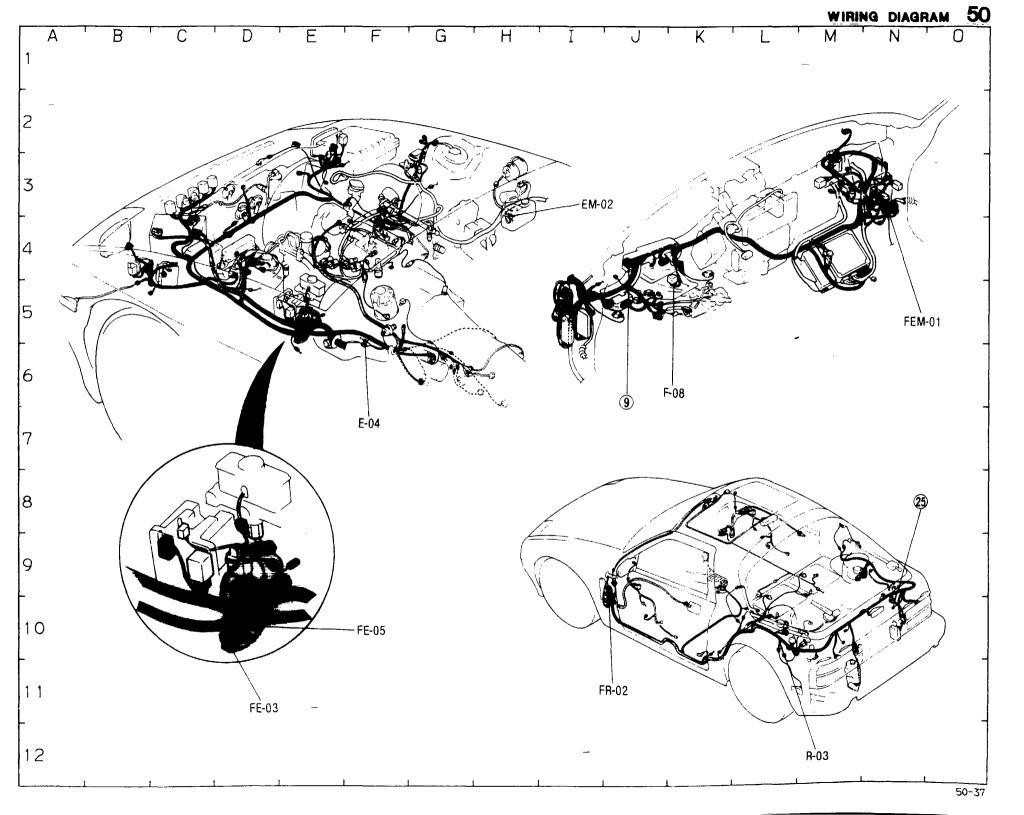

()...TURBO


B/R B/Y B/R

B/R B/L B/W


(F)


F-76


EMISSION CONTROL UNIT (PAGE 50-25, 31)

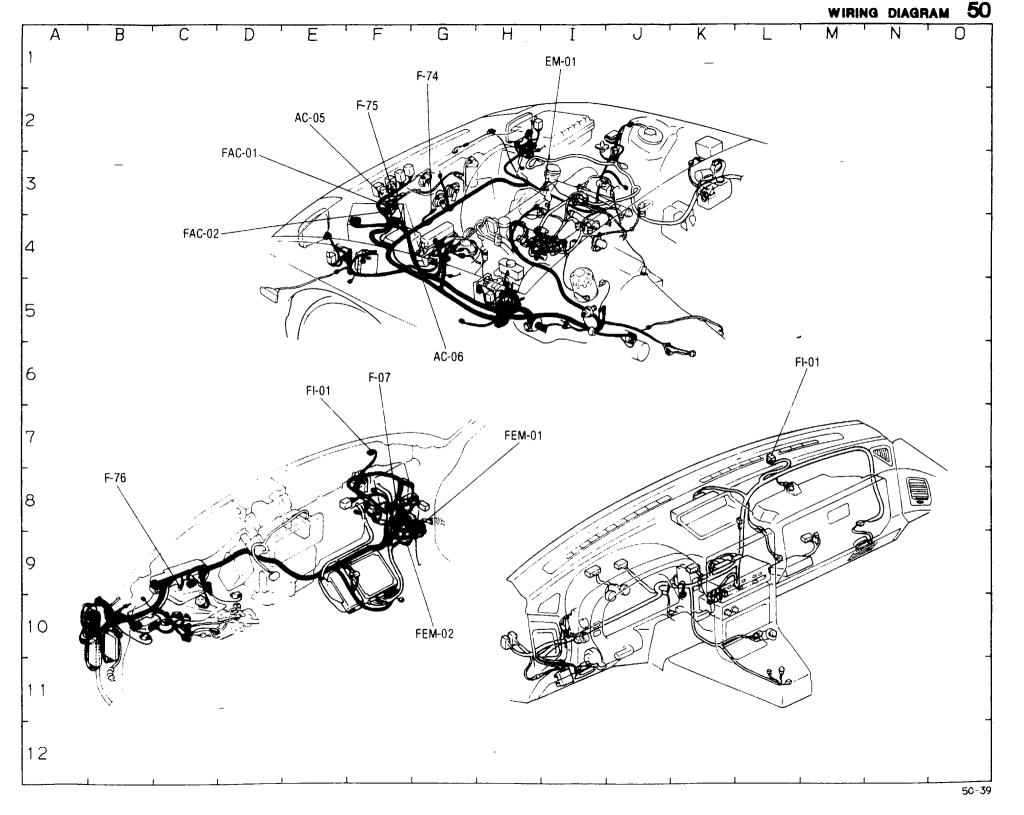


- METERS & WARNING SYSTEM

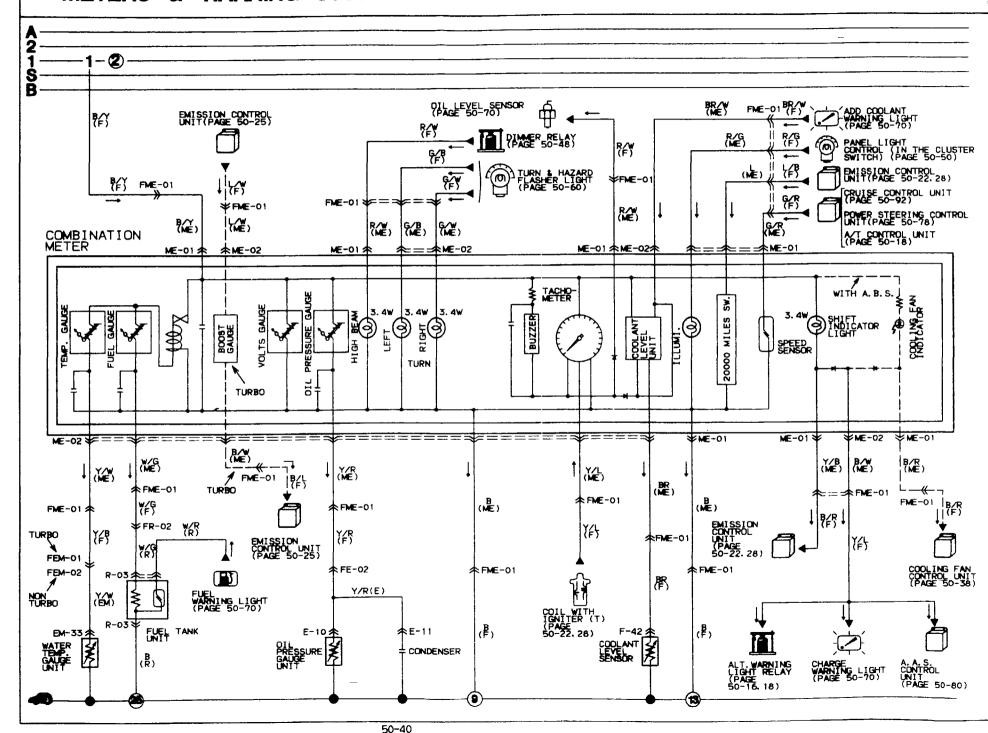

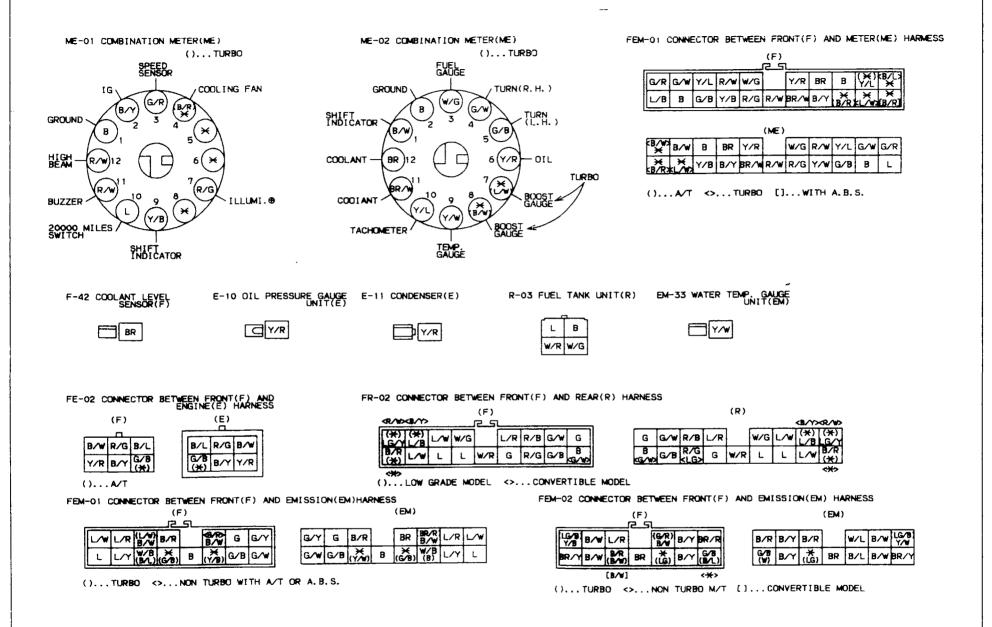

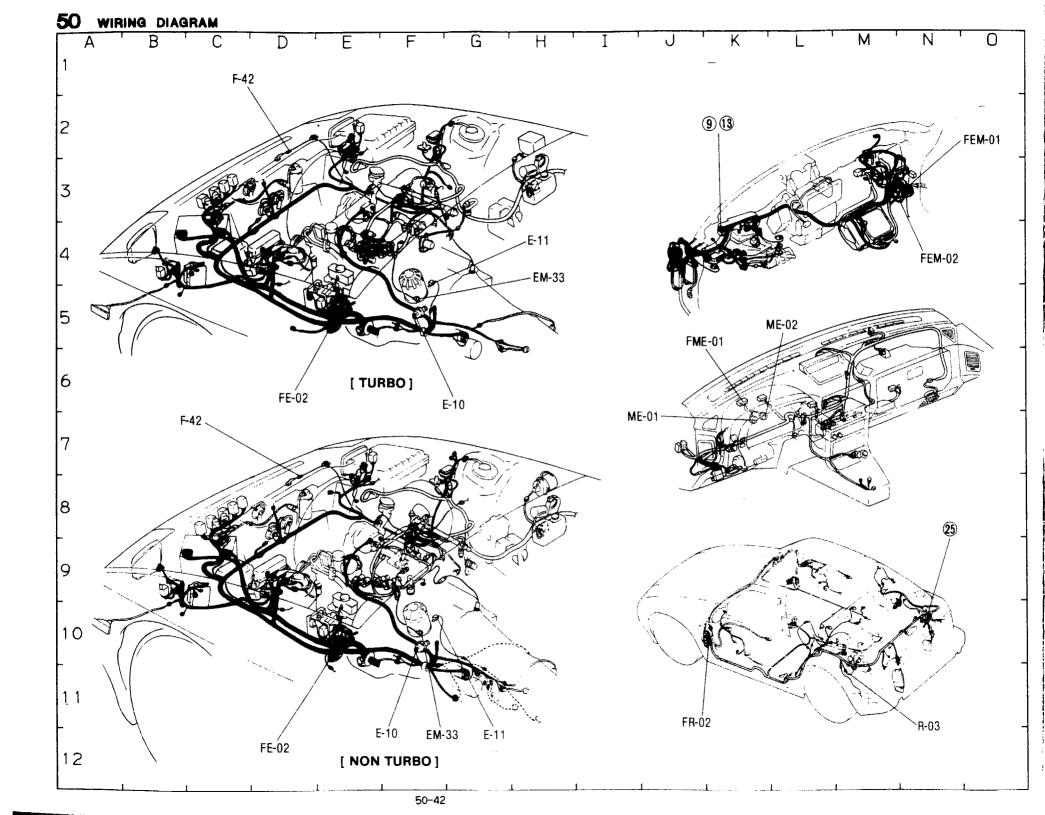

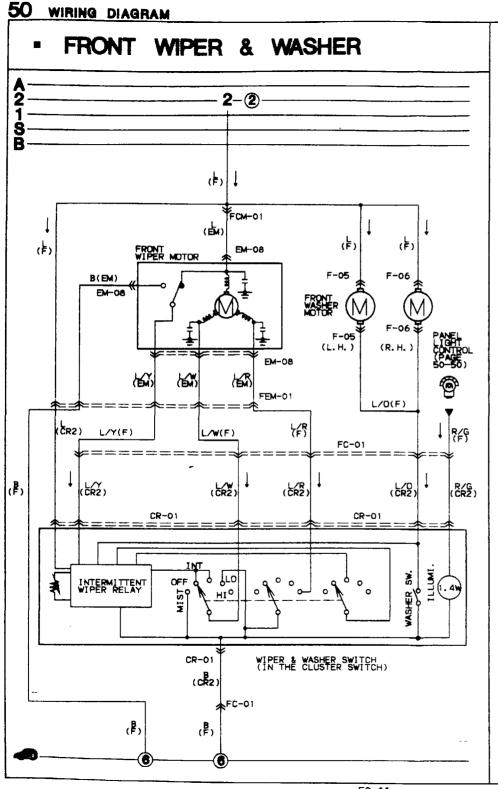


F-05 FRONT WASHER MOTOR(F) F-06 FRONT WASHER MOTOR(F)

EM-08 FRONT WIPER MOTOR (EM)

CR-01 WIPER & WASHER SWITCH(CR2)




FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM)HARNESS





()...TURBO ⇔...E.G.I. WITH A/T OR A.B.S.

FC-01 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR2)HARNESS



				(CH2					
В	GΥ	L/W	B/Y	G/O		R/G	B/R	L	7	L/0
×	G	G/L	L/RY	G/W	×	×	L/G	L/B	L/Y	L/R

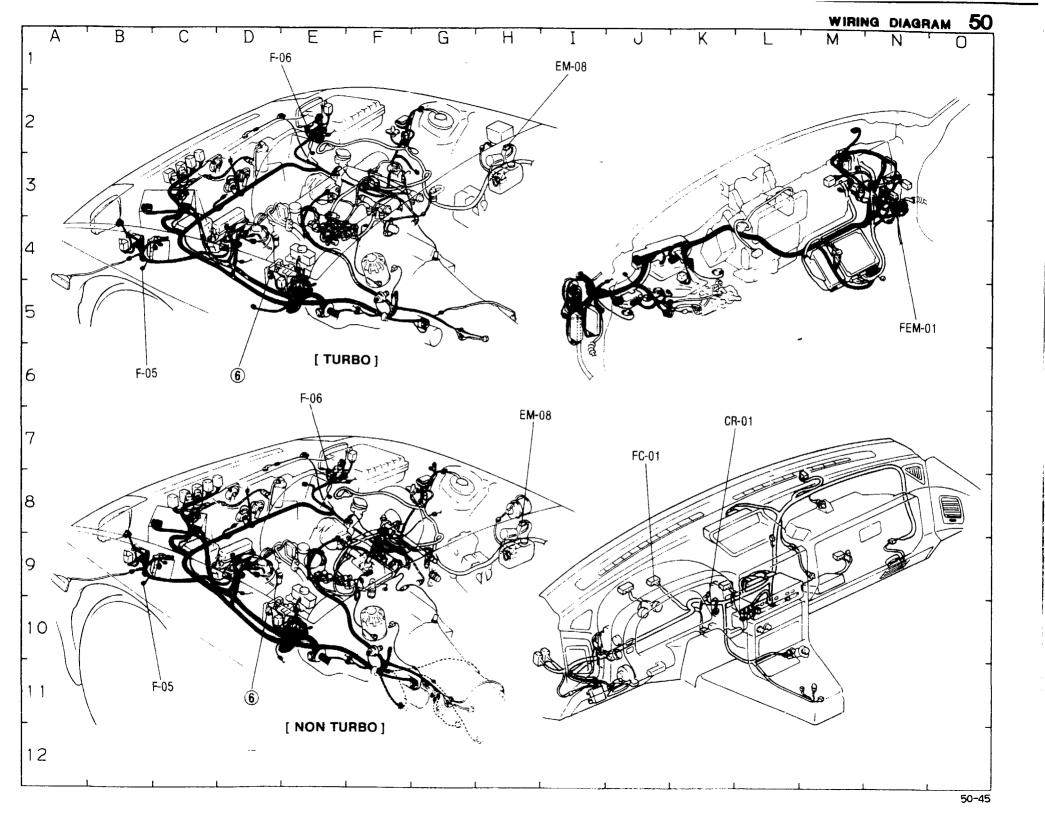

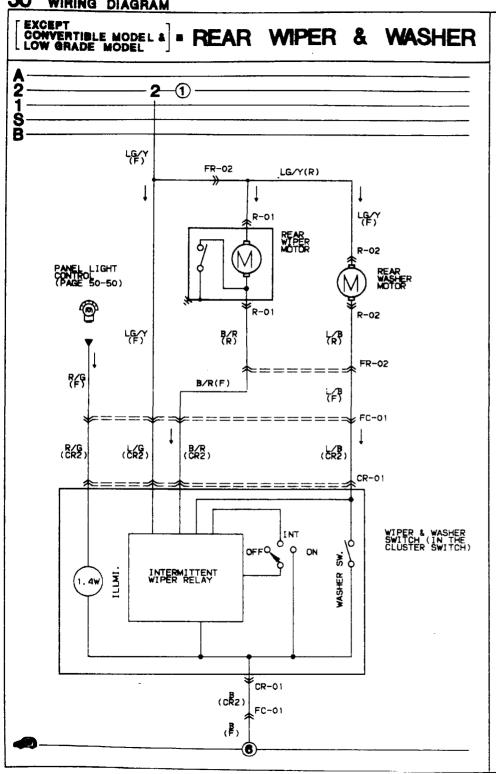


R-01 REAR WIPER MOTOR(R)

R-02 REAR WASHER

CR-01 WIPER & WASHER SWITCH(CR2)
(IN THE CLUSTER SWITCH)


Ì	G/0	R/G			L/G	L	L/B
	B/R	G/W	В	L/R	L/W	L/0	L/Y

FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS





_					(R)				
	G	G∕₩	R/B	L/R		W/G	L/W	L/B	LG/Y
ſ	В	G/B	R/G	G	W/R	L	L	L/W	B/R

FC-01 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR2) HARNESS(R.H.)



					(CR2)				
I	В	G/Y	L/W	B/Y	G/0		R/G	B/R	٦	L/W	L/O
	*	G	G/L	L/R	G/W	×	×	L/G	L/B	L/Y	L/R

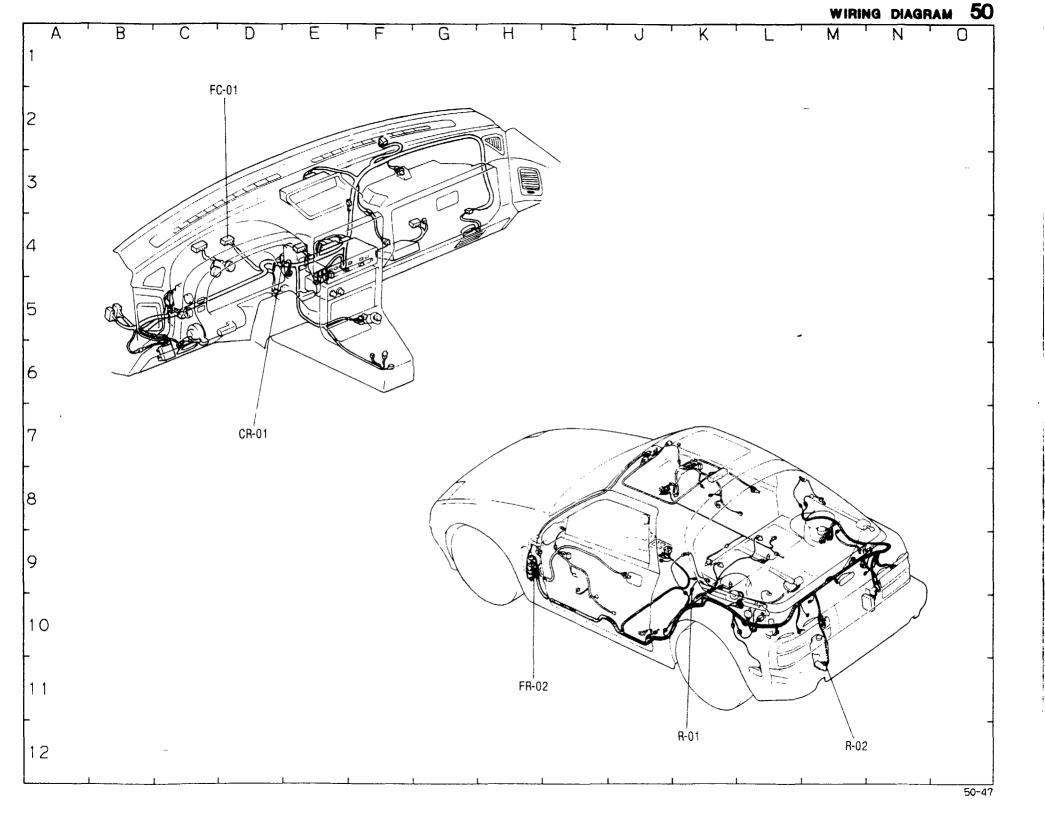

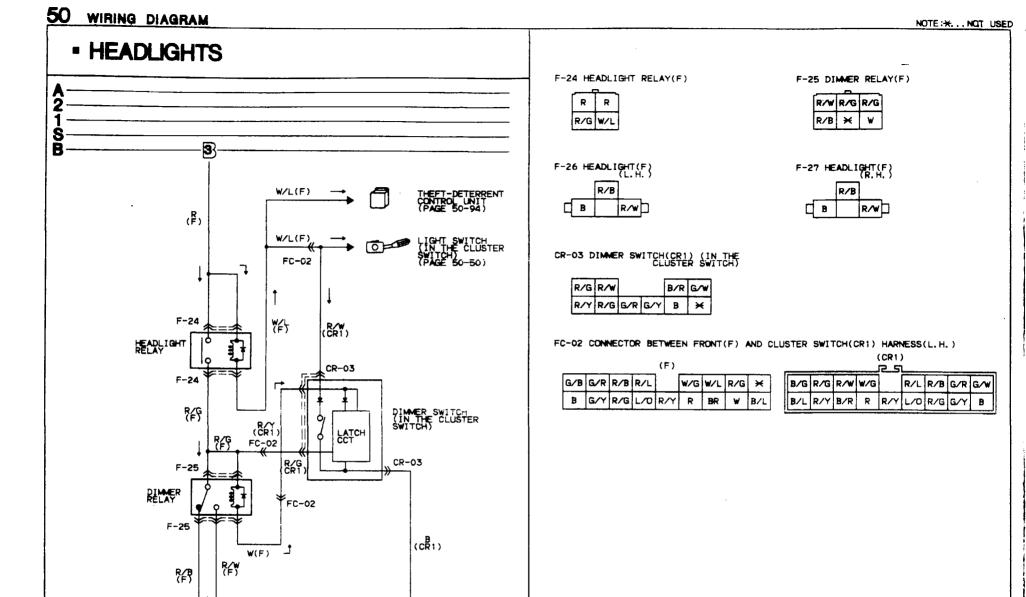


FC-02

(**B**)


R/W(F)

R/B (F) F-26

F-26

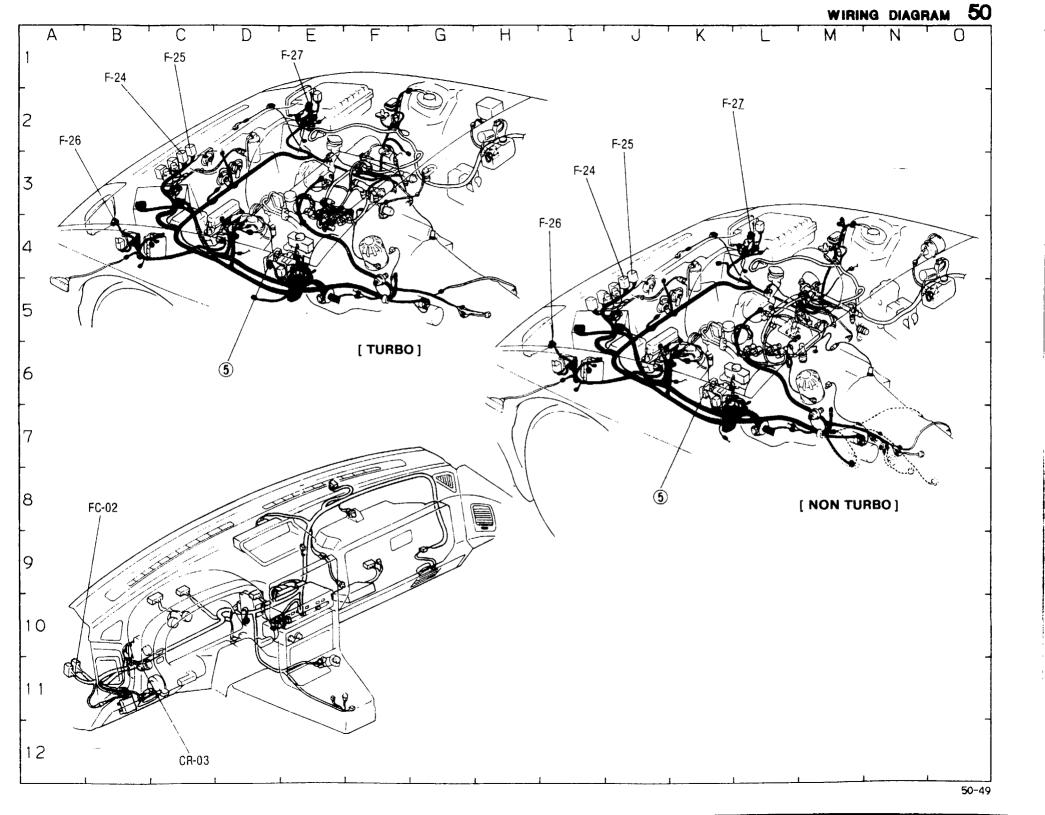

- RETRACTABLE HEADLIGHT - HEADLIGHT CLEANER - ILLUMINATION LIGHTS

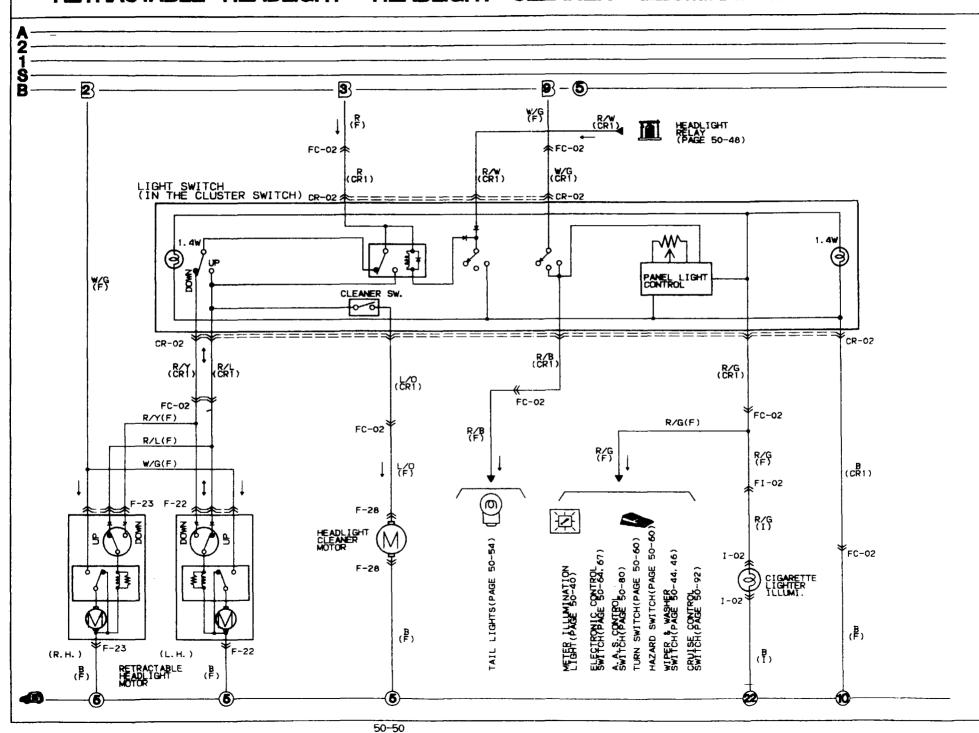





F-23 RETRACTABLE HEADLIGHT



F-28 HEADLIGHT CLEANER MOTOR(F)



I-02 CIGARETTE LIGHTER ILLUMINATION LIGHT(I)



CR-02 LIGHT SWITCH(CR1)(IN THE CLUSTER SWITCH)

1	×	R/Y	R/L			×	R/W	B/G
	R/G	W/G	R/B	В	R	L/0	B/L	B/R

FC-02 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR1)HARNESS(L.H.)

				(F)				
G/B	G∕R	R/B	R/L		W/G	W/L	R/G	×
В	G∕Y	R/G	L/0	R/Y	R	BR	W	B/L

				کے	<u> </u>			
B/G	R/G	R/W	W/G		R/L	R/B	G∕R	G∕₩
B/L	R/Y	B/R	R	R/Y	L/0	R/G	G∕Y	В


(CR1)

FI-02 CONNECTOR BETWEEN FRONT(F) AND INSTRUMENT PANEL(I)HARNESS


						(F)					
4	B /Y	>									
į	Y) LG/E	BR	L	LΥ	Y/L]	¥	G	G∕B	Z.	R∕G
	B	BR/w	\ 0	W/G	W/R	BR/w	B/Y	Y/R	R	R∕₩	R∕B

B BR/W L/O W/G W/R BR/W B/Y Y/R R R/W R/B	(Y) G/E	BR	L	L/Y	Y/L		*	G	G∕B	L/W	R/G
	В	BR/w	ᅝ	W/G	W/R	BR∕w	B/Y	Y/R	R	R/W	R/B


					(1)					
R/G	L/W	G/B	G	(X)	حدا	Y/L	LY	L	BR	KB/YX
R/B	R/W	R	Y/R	B/Y	BR/W	w/R	w/g	L/0	BR/W	В

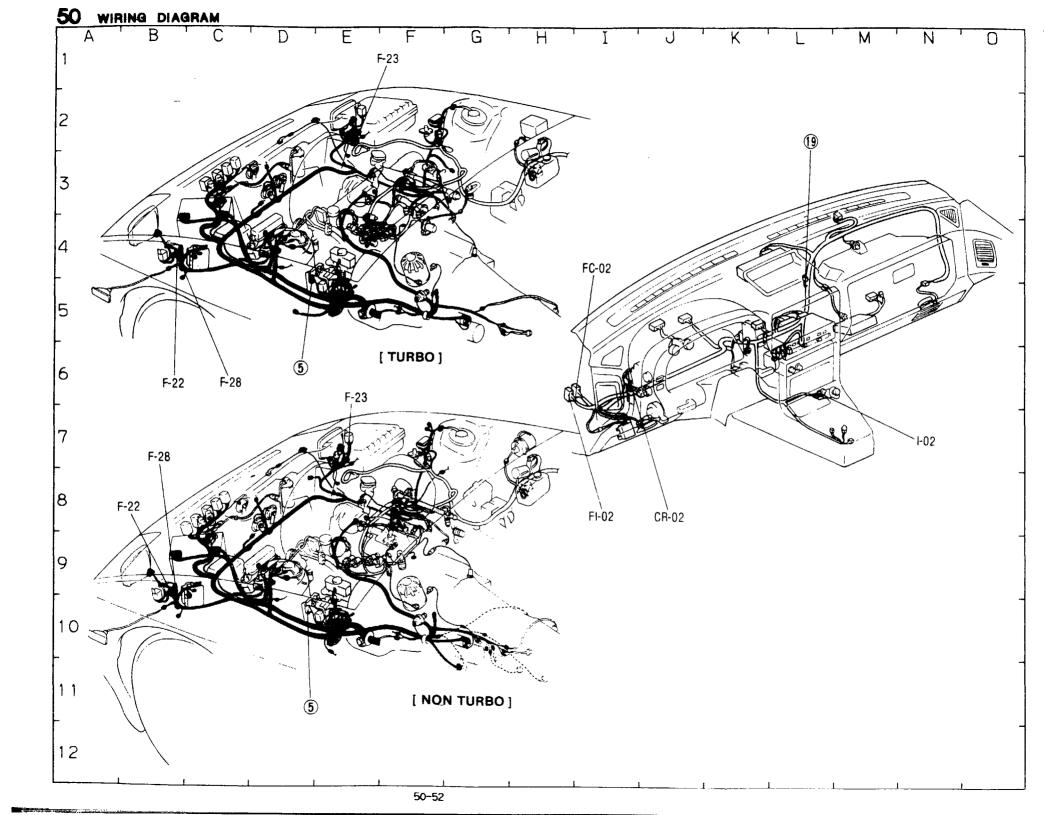



- COMBINATION LIGHTS - LICENSE LIGHTS - STORAGE BOX LIGHTS - GLOVE BOX LIGHT

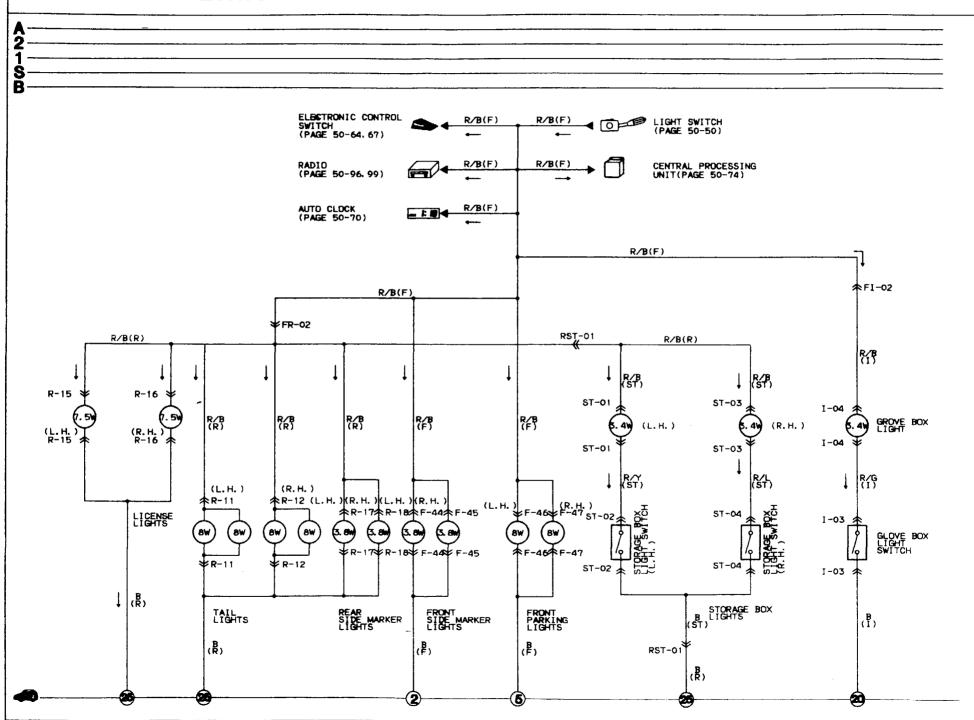


50-54

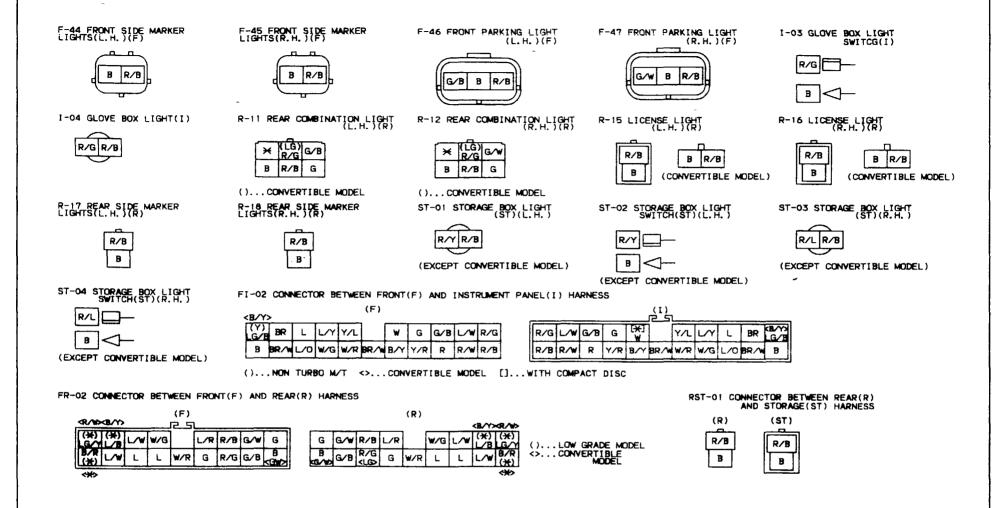

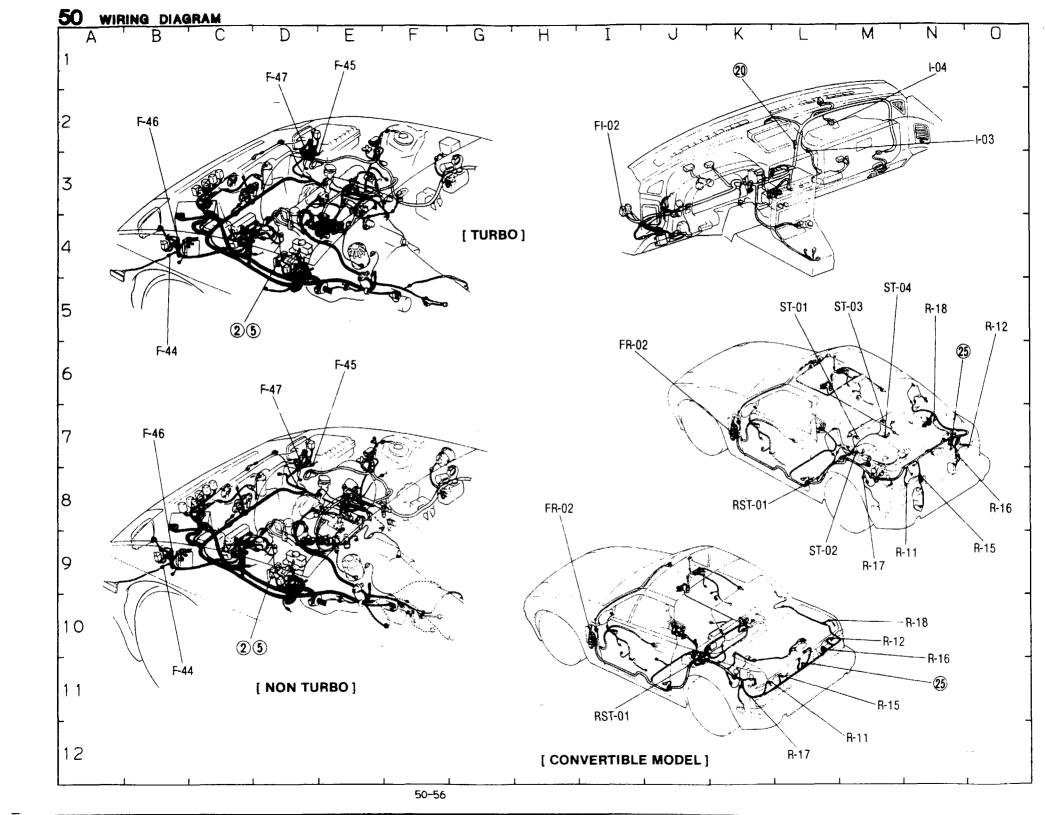

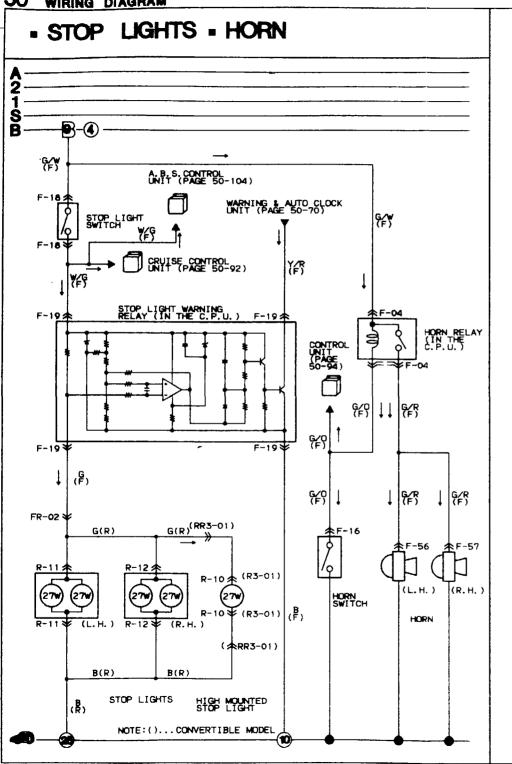

F-04 HORN RELAY(IN THE C.P.U.)(F)



()...LOW GRADE MODEL

()...LOW GRADE MODEL

F-18 STOP LIGHT SWITCH(F)

F-19 STOP LIGHT WARNING RELAY(F) (IN THE C.P.U.)



W/G Y/R G

F-56 HORN (L.H.) (F)

F-57 HORN (R.H.) (F)





R-10 HIGH MOUNTED STOP

R-11 REAR COMBINATION





R-12 REAR COMBINATION LIGHT(R)


R3-01 HIGH MOUNTED STOP LIGHT(R3)



(CONVERTIBLE MODEL)

<>...CONVERTIBLE MODEL

FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS




<>...CONVERTIBLE MODEL


G/W R/B L/R

RR3-01 CONNECTOR BETWEEN REAR(R) AND NO3 REAR(R3) HARNESS


(CONVERTIBLE MODEL)

(R3)

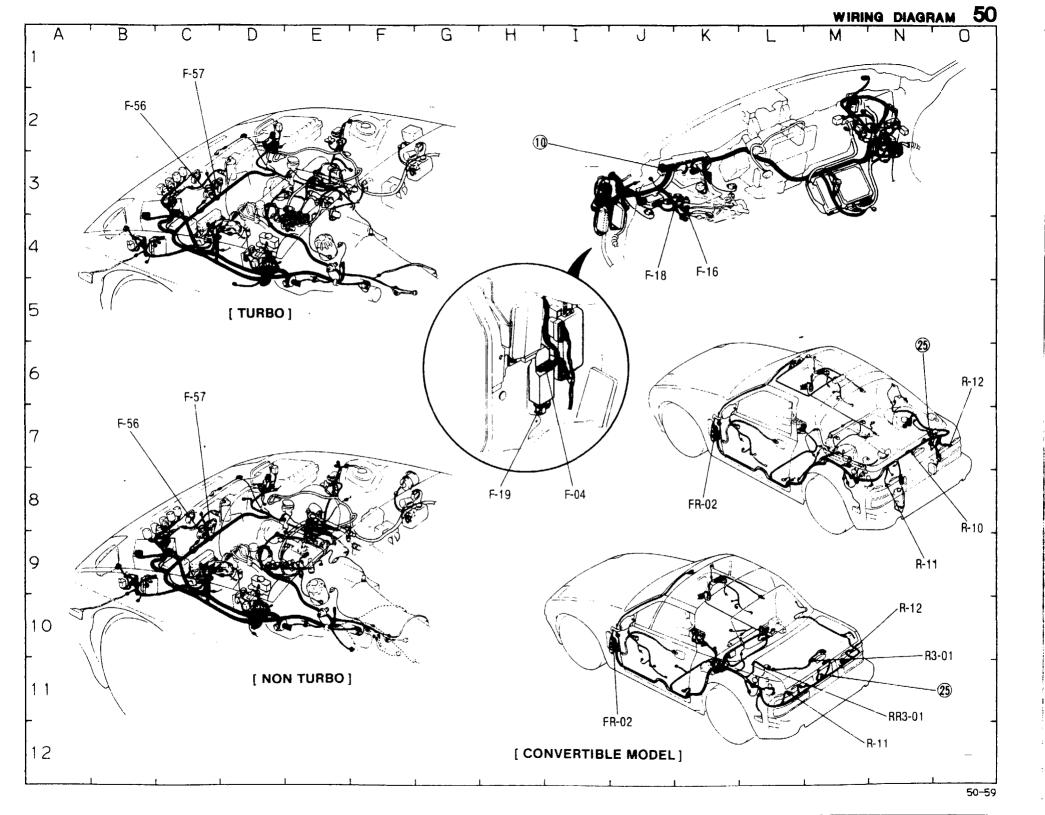


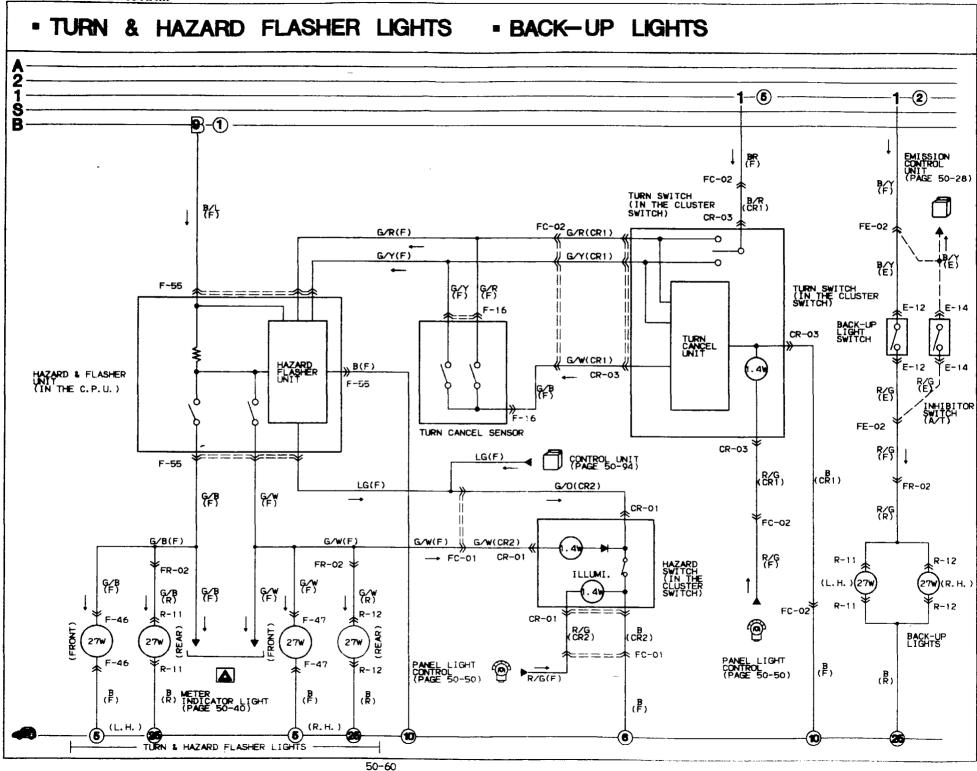

G/0 R/G

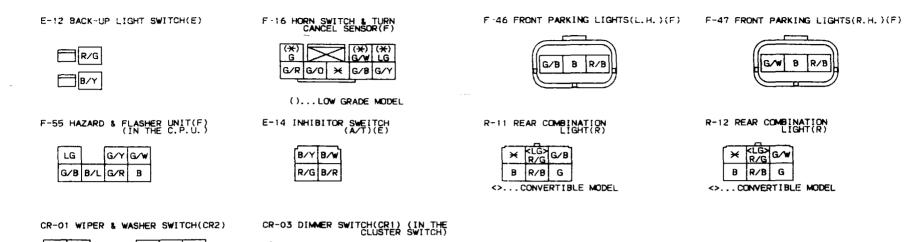

FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS




					(R)			<b y="">	dR/ ₩ >
i	G	G∕₩	R/B	L/R		W/G	L/W	(X)	(X)
ĺ	Book	G/B	R/G (LG)	G	W/R	L	L	L/W	B/R (*)
									< * >

B/R G/W

()...LOW GRADE MODEL <>...CONVERTIBLE MODEL

FC-01 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR2) HARNESS(R.H.)


R/G R/W





					CR2)				
В	G/Y	L/W	В/Ү	G/0		R/G	B/R	٦	7	L/0
×	G	G∕L	L/R	G⁄₩	*	×	L/G	L/B	L/Y	L/R


()...LOW GRADE MODEL <>...CONVERTIBLE MODEL


FC-02 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR1) HARNESS(L.H.)










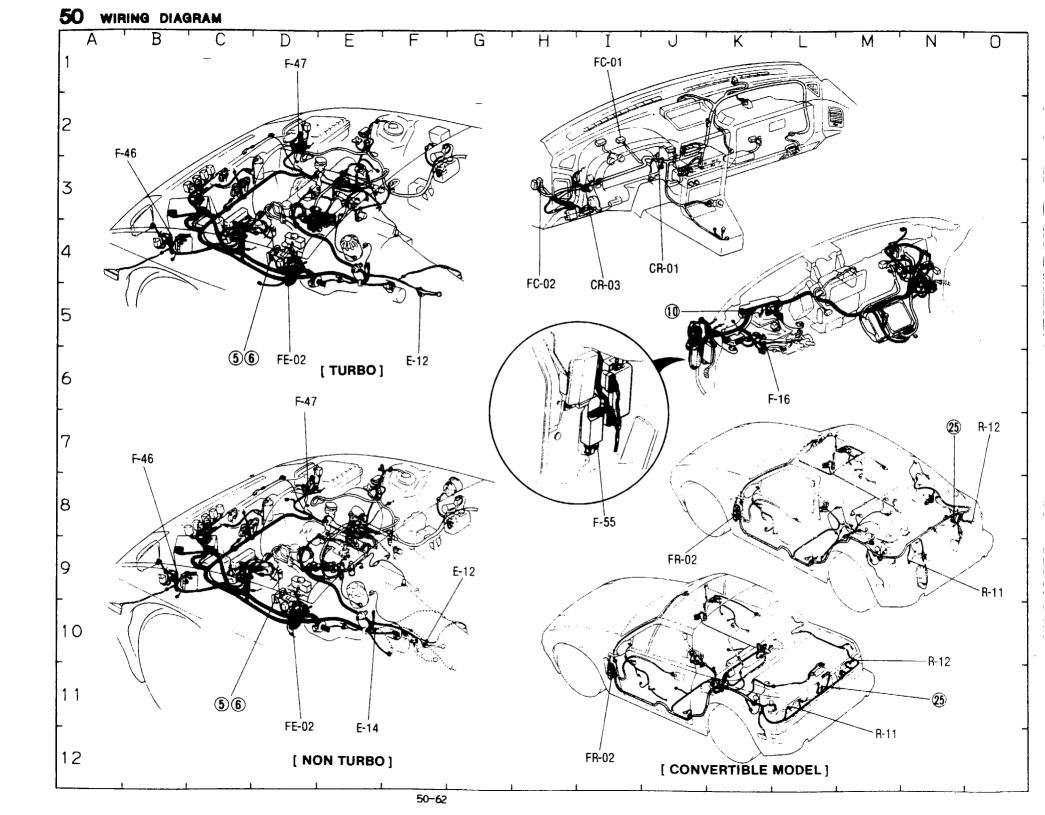

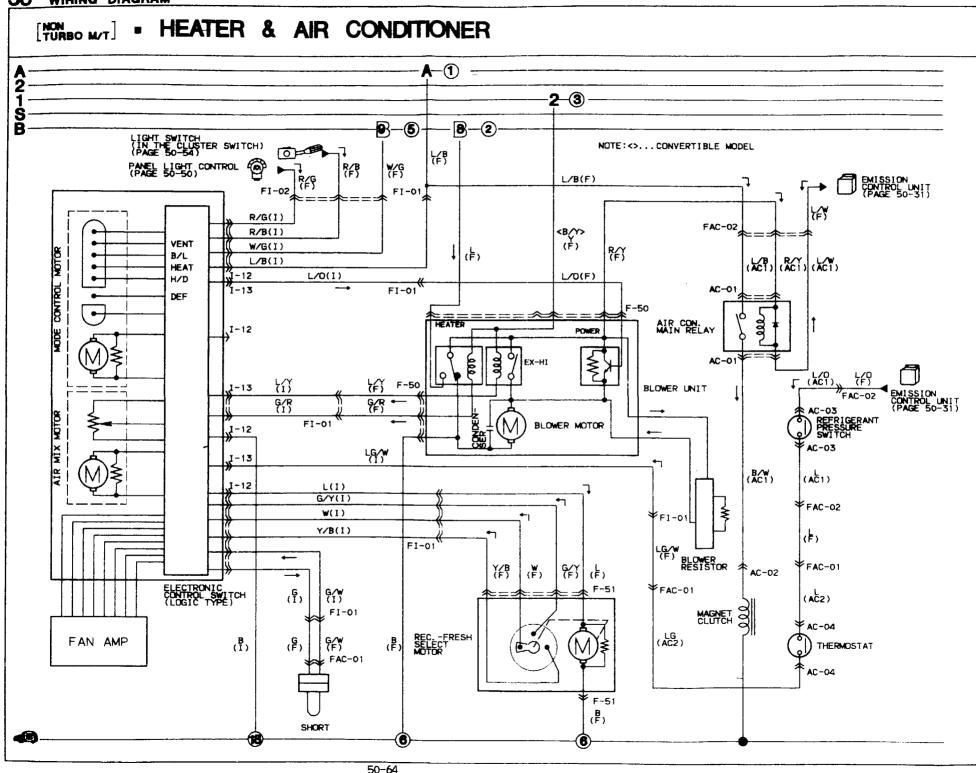

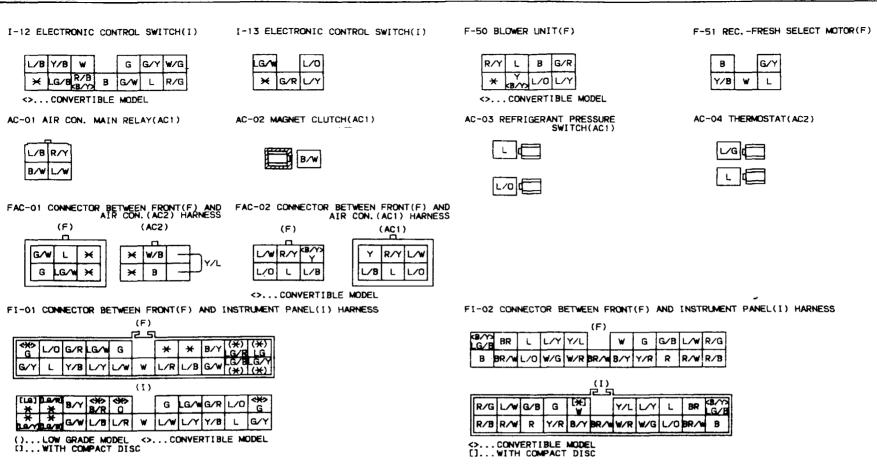


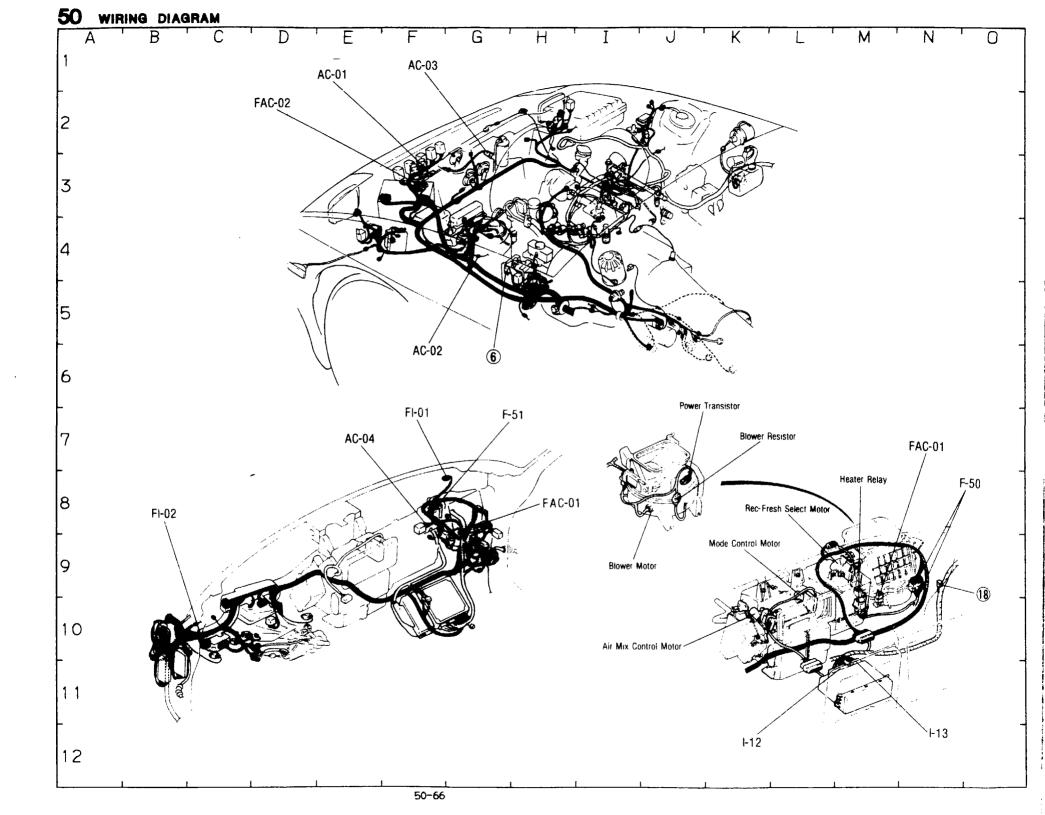

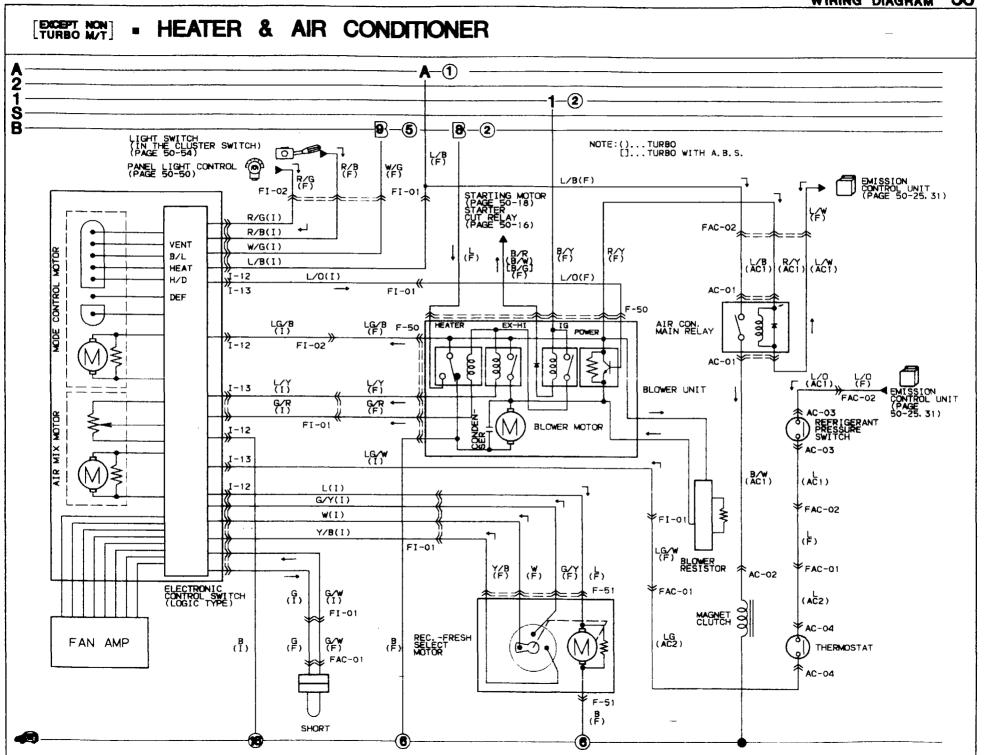

I-12 ELECTRONIC CONTROL SWITCH(I) F-51 REC, -FRESH SELECT MOTOR(F) I-13 ELECTRONIC CONTROL SWITCH(I) F-50 BLOWER UNIT(F) G w/G <B/G>
()...TURBO <>...TURBO WITH A.B.S. AC-03 REFRIGERANT PRESSURE AC-01 AIR CON. MAIN RELAY(AC1) AC-02 MAGNET CLUTCH(AC1) AC-04 THERMOSTAT(AC2) SWITCH(AC1) FAC-02 CONNECTOR BETWEEN FRONT(F) AND AIR CON. (AC1) HARNESS FAC-01 CONNECTOR BETWEEN FRONT(F) AND AIR CON. (AC2) HARNESS (F) (AC2) (F) (AC) × W/B L/WIR/Y R/Y


FI-01 CONNECTOR BETWEEN FRONT(F) AND INSTRUMENT PANEL(I) HARNESS




			(1)					
ELG DATE B/Y	B/R	0		G	LG∕₩	G∕R	ار	G
Terres GW	L/B	Ľ₹	W	L/W	LΥ	Y/B	٦	G/Y


()...TURBO <>...WITH A.B.S.

FI-02 CONNECTOR BETWEEN FRONT(F) AND INSTRUMENT PANEL(I) HARNESS

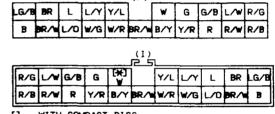

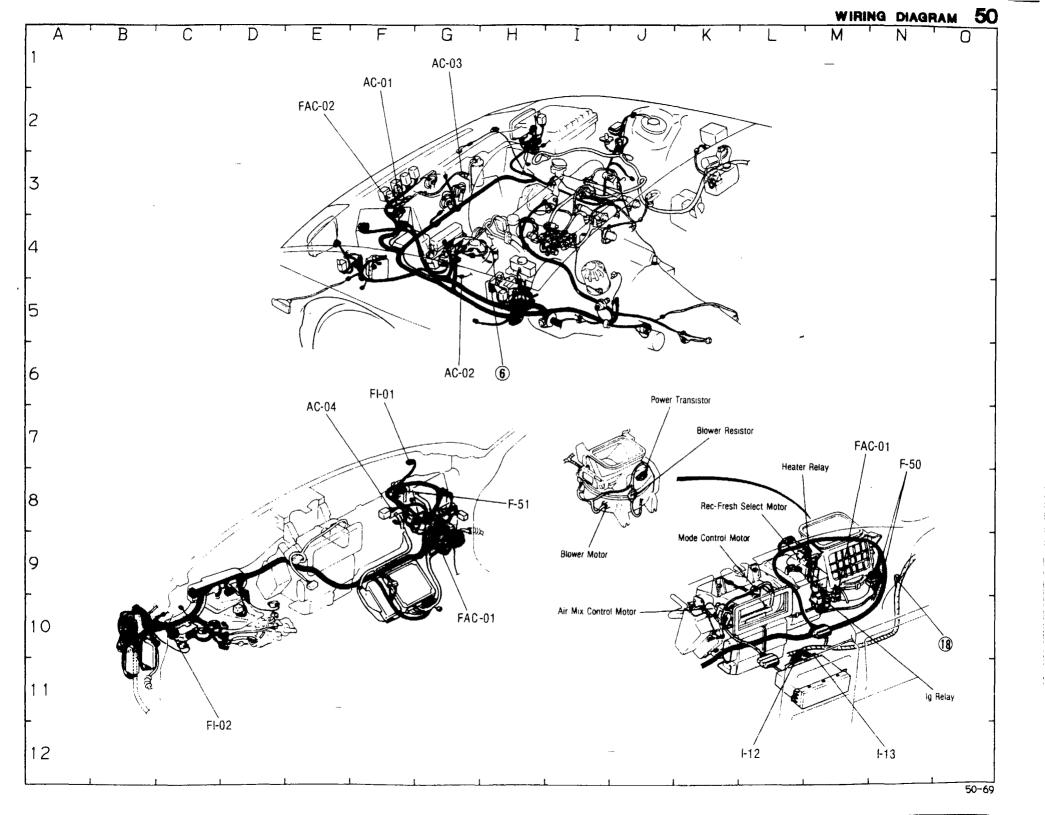

WARNING & AUTO CLOCK SYSTEM

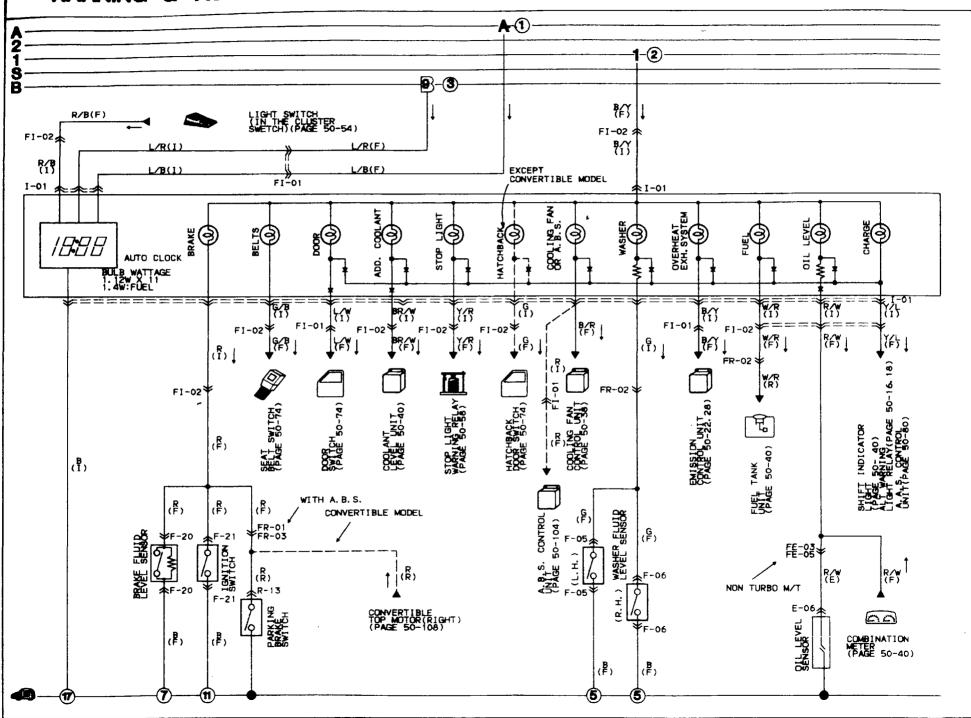





()...CONVERTIBLE MODEL <>...WITH A.B.S.

E-06 OIL LEVEL SENSOR(E)

R-13 PRKING BRAKE SWITCH(R)











FE-05 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E) HARNESS






FE-03 CONNECTOR BETWEEN FRONT(F) AND ENGINE(E)
HARNESS (NON TURBO) (TURBO)


(F)

В

×


B/R W/B








FR-01 CONNECTOR BETWEEN FRONT(F) AND REAR(R)HARNESS

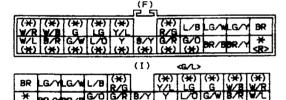


()...LOW GRADE MODEL <>...WITH A.B.S.

FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS





()...CONVERTIBLE MODEL <>...LOW GRADE MODEL

FR-03 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS

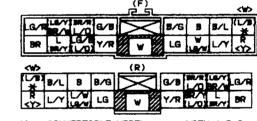

()...CONVERTIBLE MODEL <>...WITH A.B.S.





			(I)				•	
* * B/Y	B/R	(X)					L/0	¥σ
TEM G/B G/W	L/B	L/R	*	L/W	L/Y	Y/B	L	3

()...LOW GRADE MODEL <>...WITH COMPACT DISC

[]...CONVERTIBLE MODEL


FI-02 CONNECTOR BETWEEN FRONT(F) AND INSTRUMENT PANEL(I) HARNESS


<y></y>										
2	96	L	۲,	Y/L		W	G	G∕B	L/W	R/G
В	BR/W	3	ÿ	W/R	BR/w	B/Y	Y/R	R	R/W	R/B


					اكـــ	٠				
R/G	L/W	G∕B	G	[X]		Y/L	LY	L	BR	
R/B	R∕₩	R	Y/R	3/ Y	BR/W	W/R	w/G	L/0	BR/W	В

()...COVERTIBLE MODEL <>...NON TURBO M/T


[]...WITH COMPACT DISC

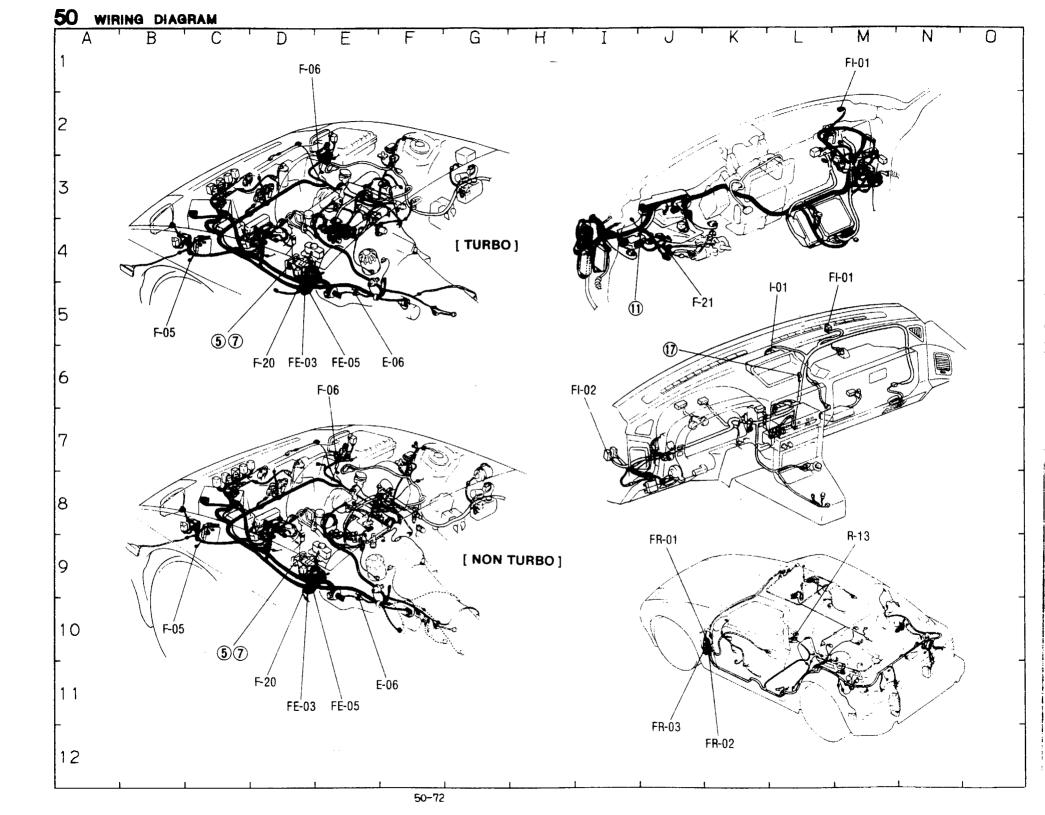

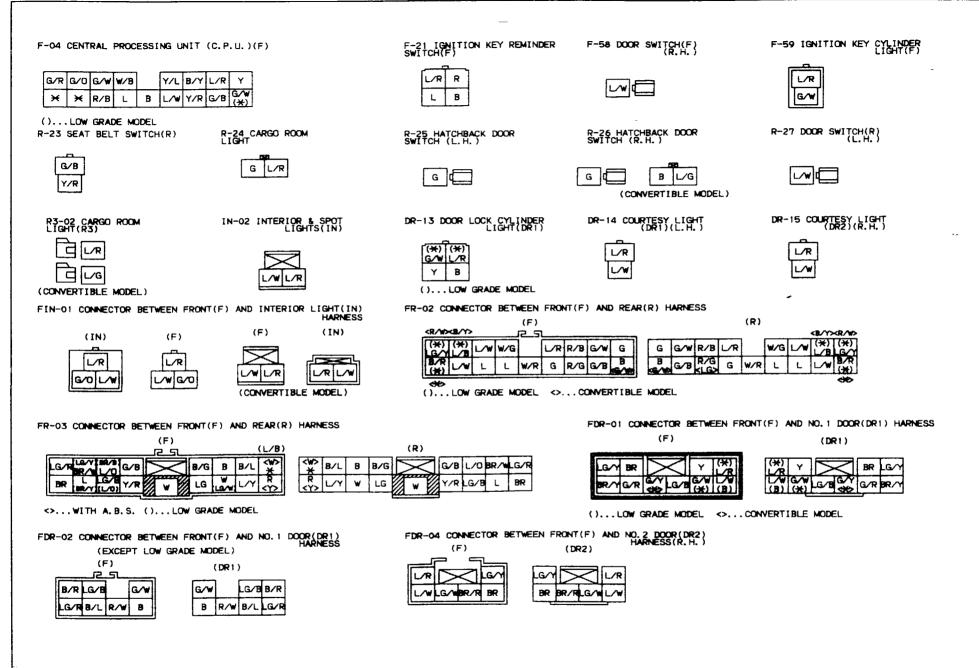

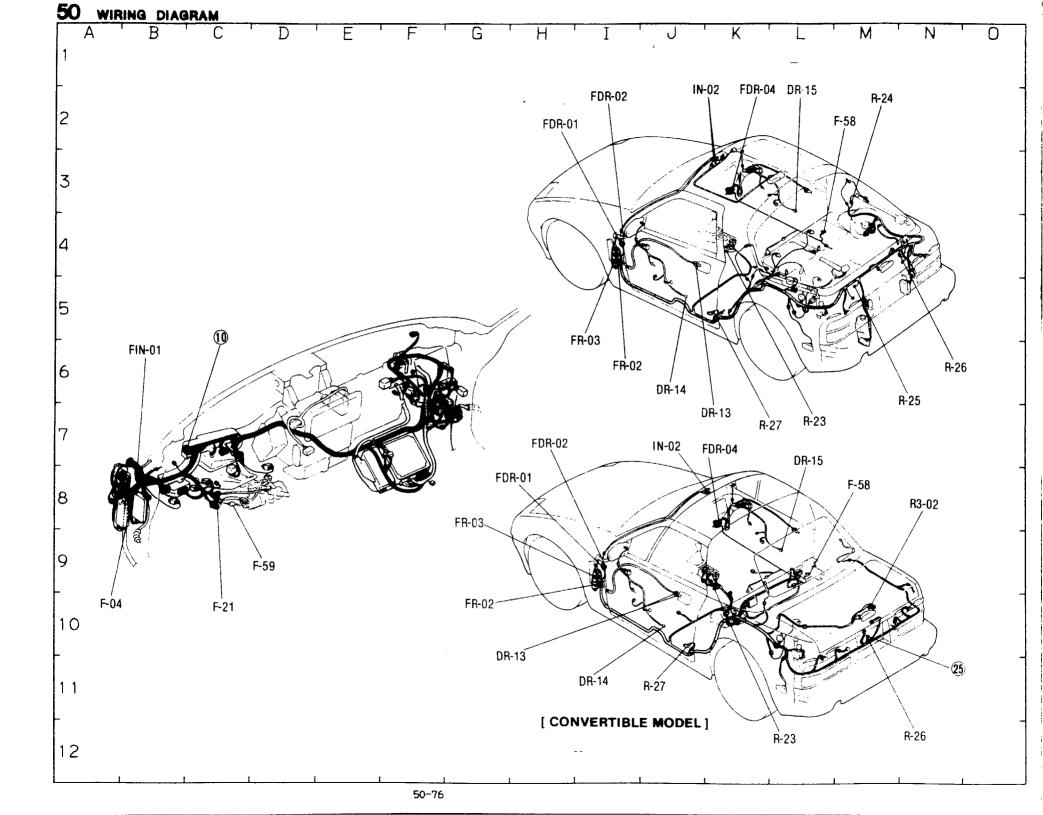



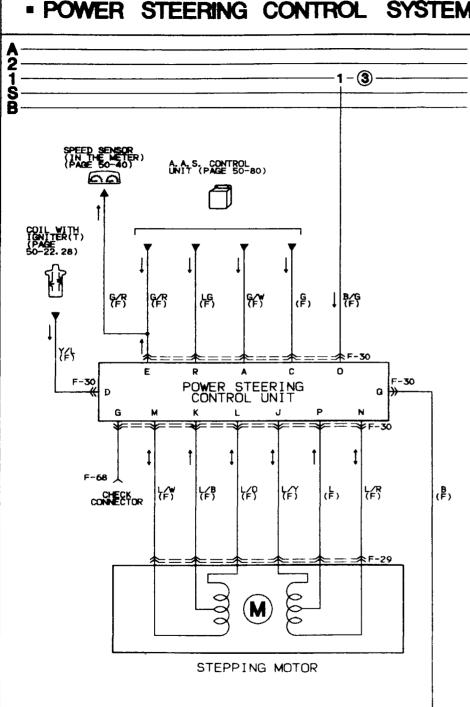

F-29 STEPPING MOTOR(F)


F-30 POWER STEERING CONTROL UNIT(F)

L/B	۲	L/R
L/W	L/O	٦


	Q	0	М	K		G	Ε	C	A					
	В	B/G	L/W	L/B		< ∀>	G/R	G	G∕₩					
	LG	L	L/R	L/O	L/Y	*	×	Y/L	×					
	R	Р	N	L	J	н	F	D	В					
<	<>	CON	/ERT	<>CONVERTIBLE MODEL										

F-68 CHECK CONNECTOR(F)



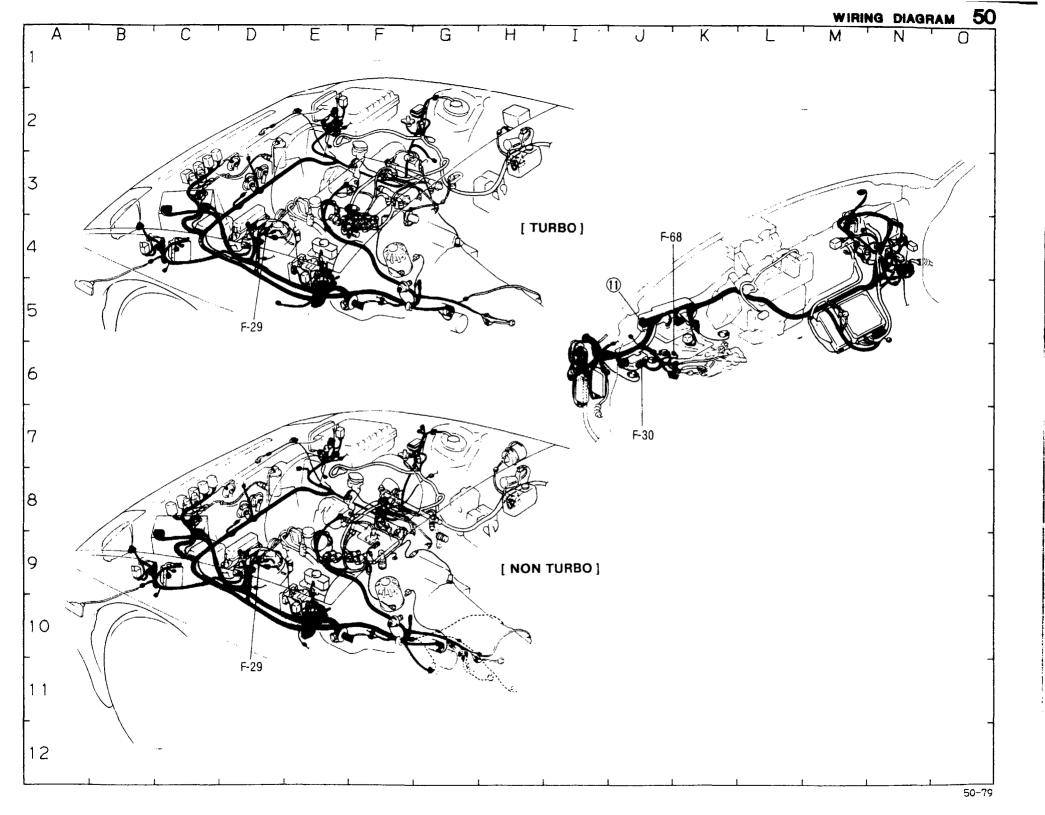

- AUTO ADJUSTING SUSPENSION CONTROL SYSTEM

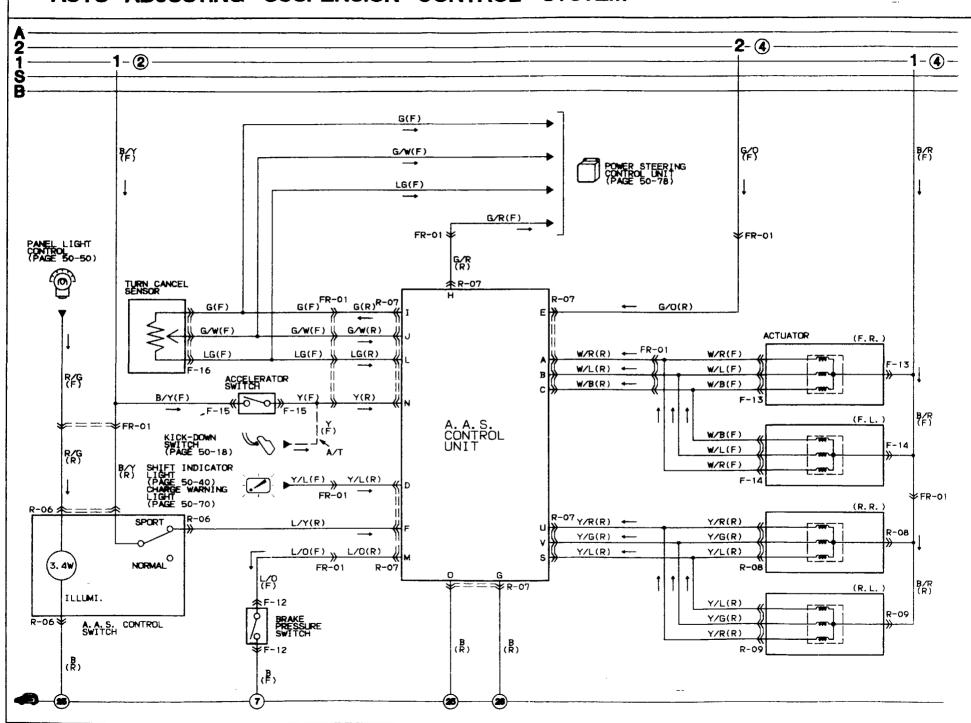

F-12 BRAKE PRESSURE SWITCH(F)

F-13 ACTUATOR(F,R.)(F)

F-14 ACTUATOR(F.L.)(F)

F-15 ACCELERATOR SWITCH(F)


F-16 HORN SWITCH & TURN CANCEL SENSOR(E)



×	W/B	₩∕R
×	B/R	W/L

B/Y

()...NON TURBO WITH A.B.S. OR A/T



R-06 A. A. S. CONTROL SWITCH(R) R-07 A. A. S. CONTROL UNIT(R)

i	R/G		B/Y
	В	7	×

<u>. U</u> .	s	Q.	0	м		_1_	G	E	С	Α
Y/R	Y/L	*	В	L/0		G	В	G/0	w/B	W/R
Y/6	*	*	*	Y	LG	G/W	G/R	LY	Y/L	W/L
	Ť	R	Р	N	L,	J	Н	F	D	В


R-08 ACTUATOR(R.R)(R)

R-09 ACTUATOR(R.L)(R)






FR-01 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS





<>... WITH A.B.S.

					(K)					
BR	LG/Y	LG/W	L/B	R/G		Y/L	GC/L>	G	W/B	W/R
* <r></r>	BR/Y	BR/R	G/O	G/R	B/Y	Y	L/O	G/W	B/R	W/L

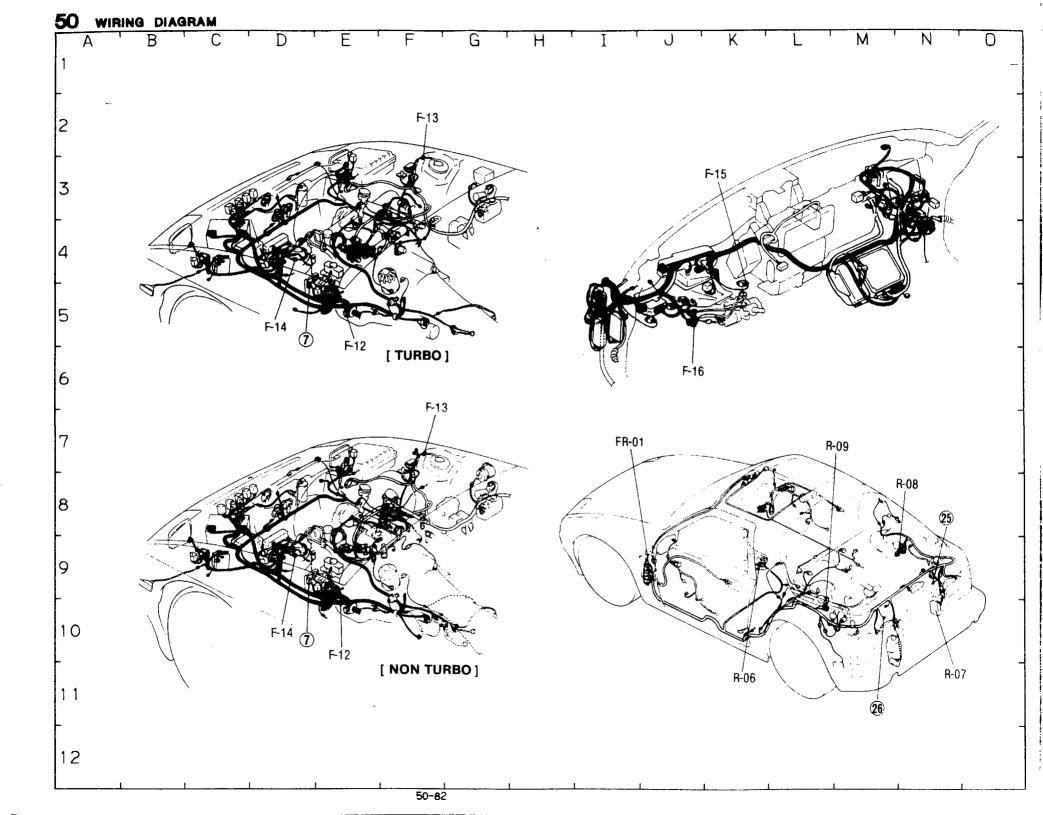



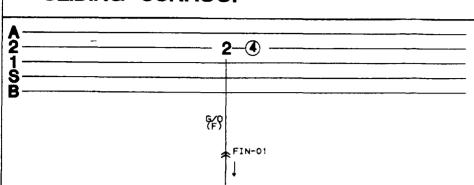

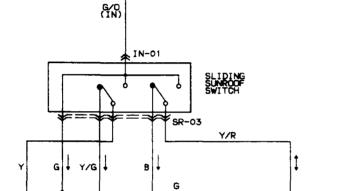

SR-02

SR-04


IN-01 SLIDING SUNROOF SWITCH(IN) SR-01 SUNROOF RELAY 1





SR-02 SUNROOF RELAY 2


SR-03 SLIDING SUNROOF SWITCH





SR-04 SLIDING SUNROOF MOTOR












SR-02

L/G

L/G

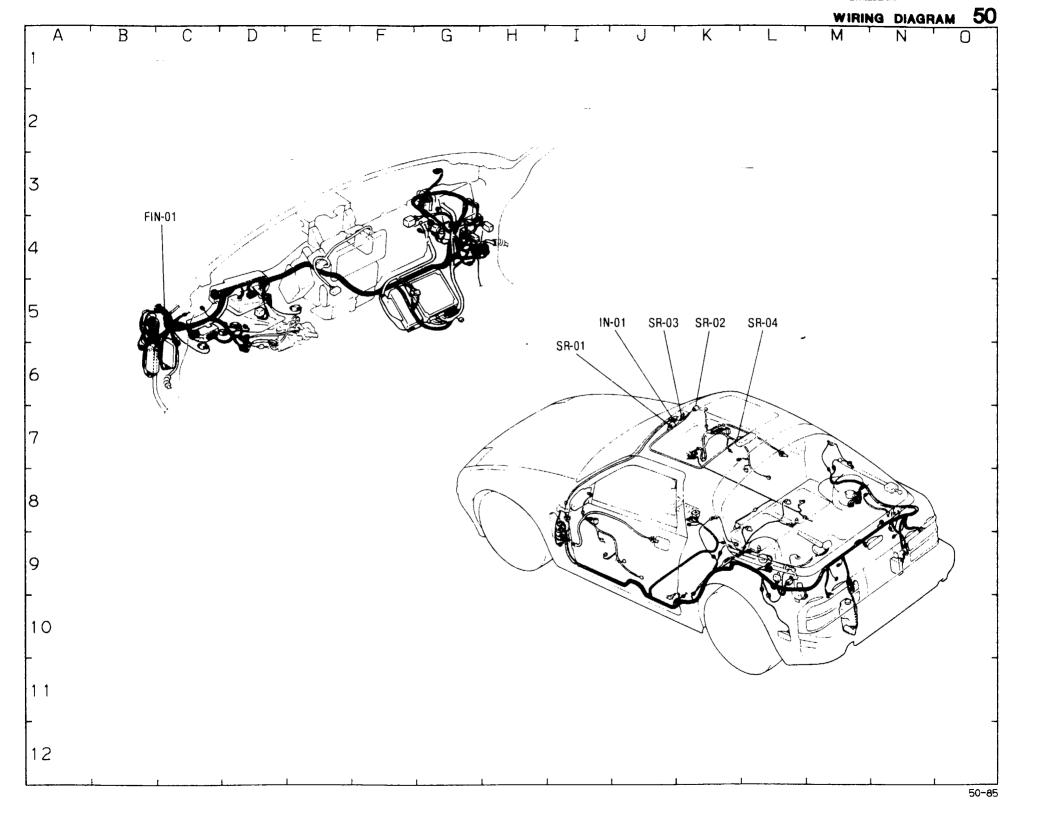

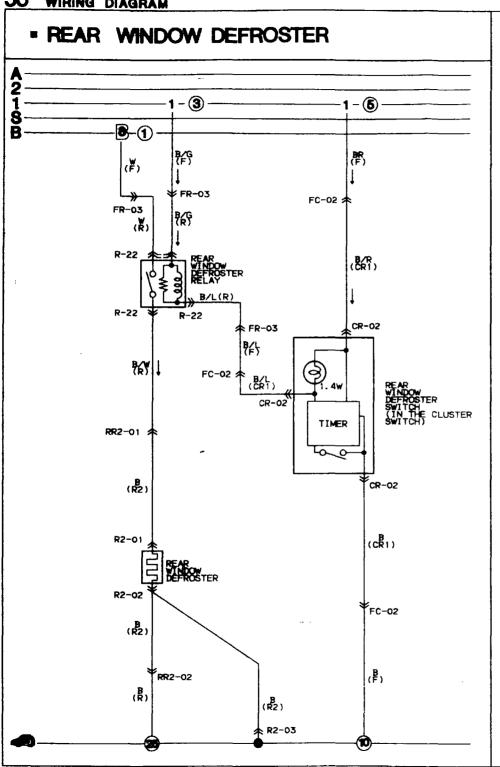


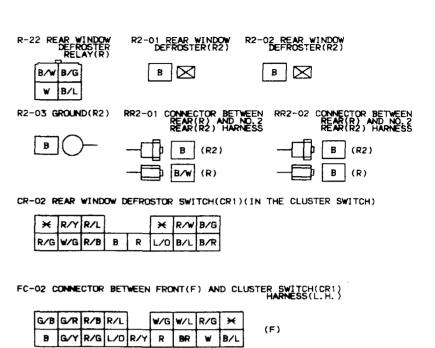

FR-03 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS


R/L R/B G/R G/W


(CRI)

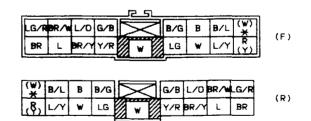

()... WITH A. B. S.

B/G R/G R/W W/G

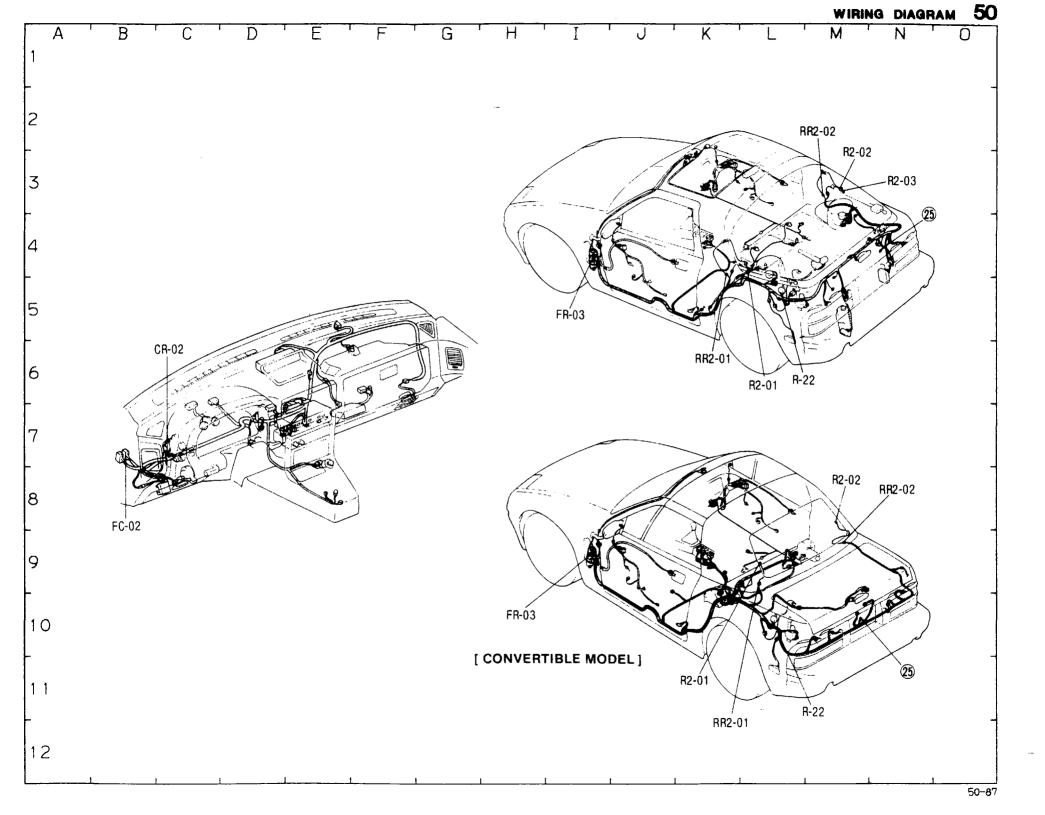

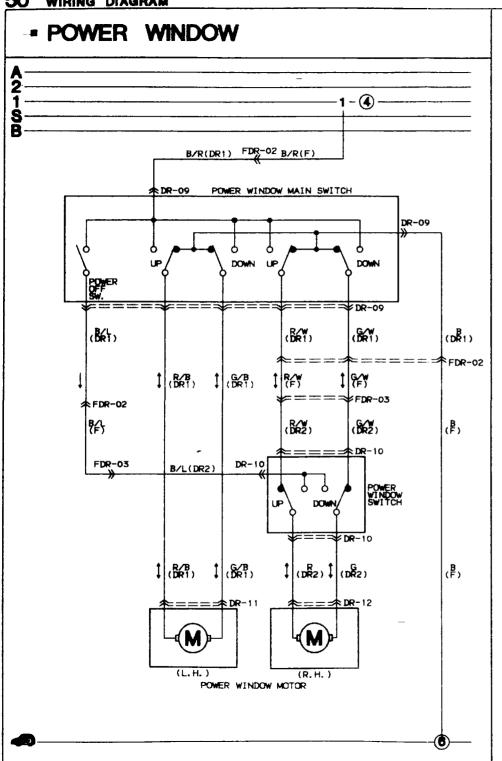

DR-09 POWER WINDOW MAIN SWITCH(DRI)


DR-10 POWER WINDOW SWITCH(DR2)

DR-11 POWER WINDOW MOTOR (L.H.)(DR1)

DR-12 POWER WINDOW MOTOR (R, H,)(DR2)





FDR-02 CONNECTOR BETWEEN FRONT(F) FDR-03 CONNECTOR BETWEEN FRONT(F) AND NO. 2 DODR (DR2) AND NO. 2 DODR (DR2) HARNESS




(DR1)


(DR2) G/W B/L LG G/R R/W

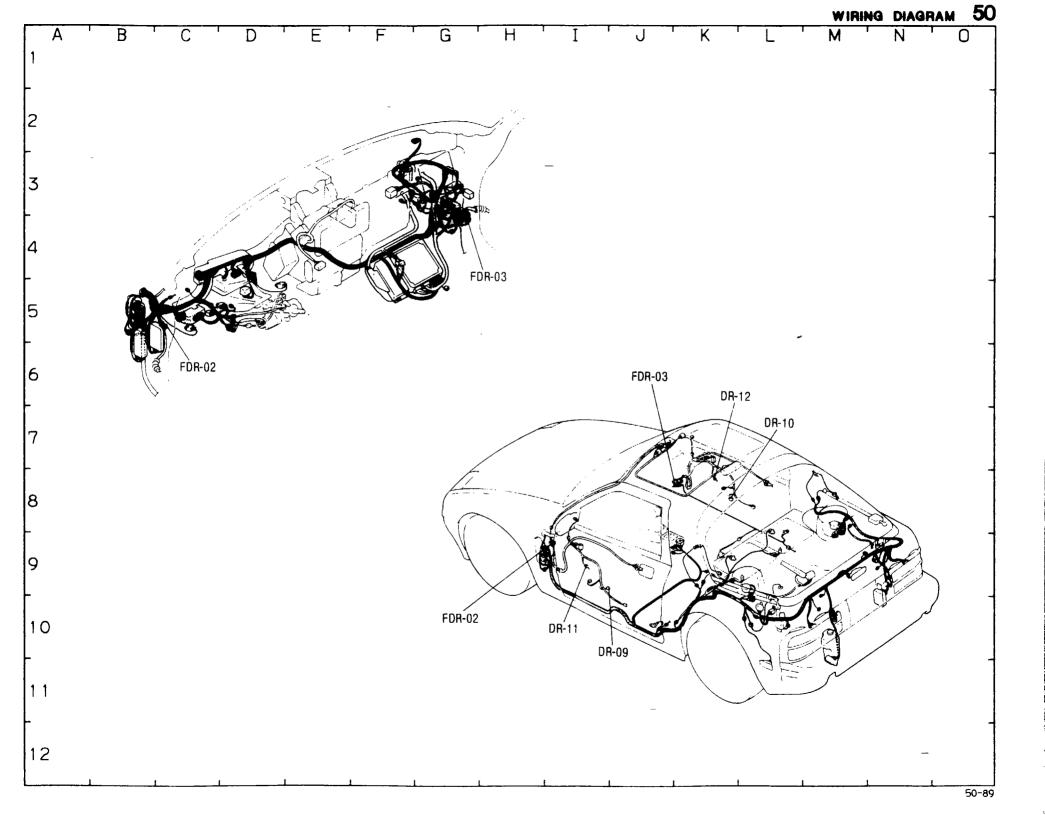

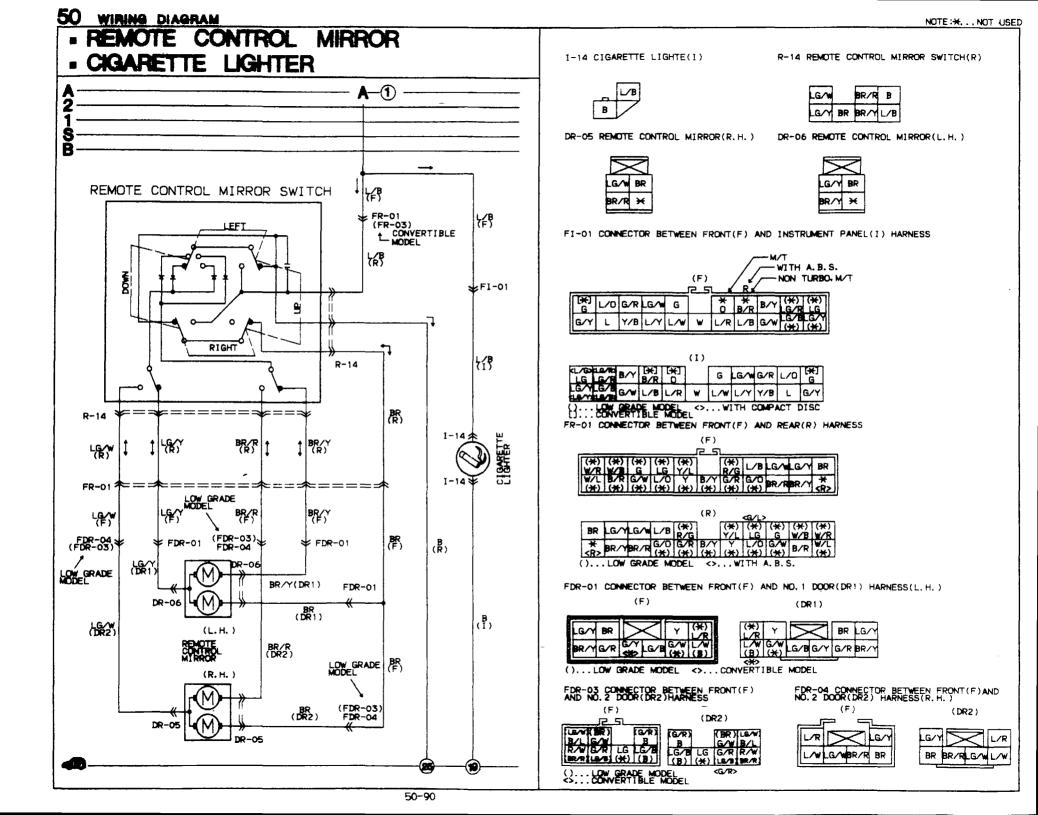


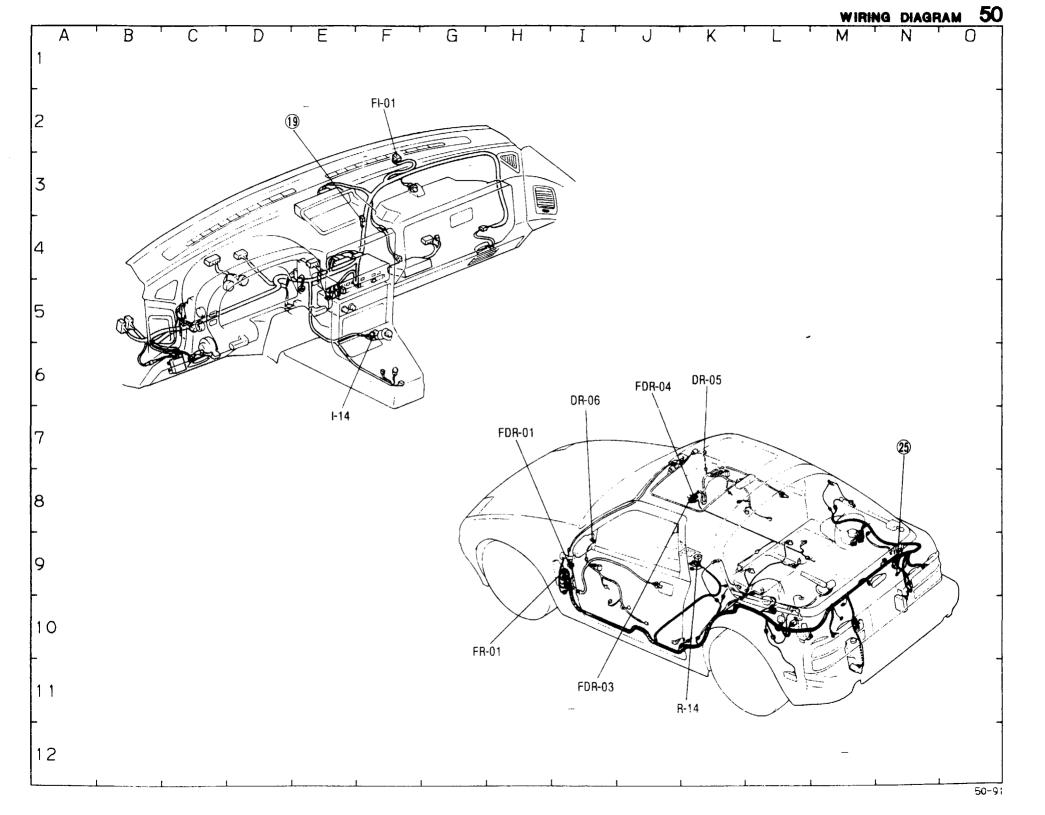



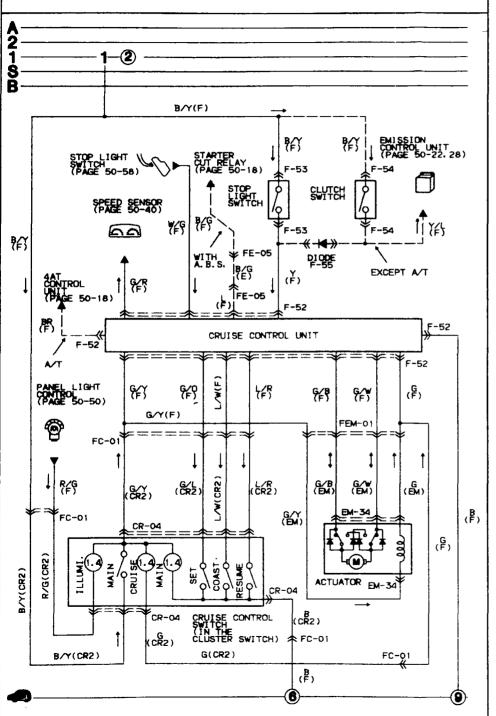

F-52 CRUISE CONTROL UNIT(F)



()...A/T <>...NON TURBO WITH A.B.S.


F-54 CLUTCH SWITCH(F) F-55 DIODE(F)



F-53 STOP LIGHT SWITCH(F)

EM-34 ACTUATOR (EM)








R-04 CRUISE CONTROL SWITCH (IN THE CLUSTER SWITCH) (CR2)





()...A/T


FEM-01 CONNECTOR BETWEEN FRONT(F) AND EMISSION(EM)HARNESS

L/W L/R B/W B/R B/W G G/Y
L L/Y B/W B/R B * G/B G/W

G/Y	ø	B/R		BR	BR/R	L/R	L/W
G∕₩	G∕B	(Y/W)	B	* (G∕B)	W/B	LΥ	L

()...TURBO <>...NON TURBO WITH A/T OR A.B.S.


FC-01 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR2)HARNESS





(CR2)


	В	G/Y	L/W	B/Y	c √0		R/G	B/R	٦	L/W	L/O
I	*	G	G/L	L/RY	G⁄₩	*	×	L/G	L/B	١	L/R

()...LOW GRADE MODEL <>...CONVERTIBLE MODEL

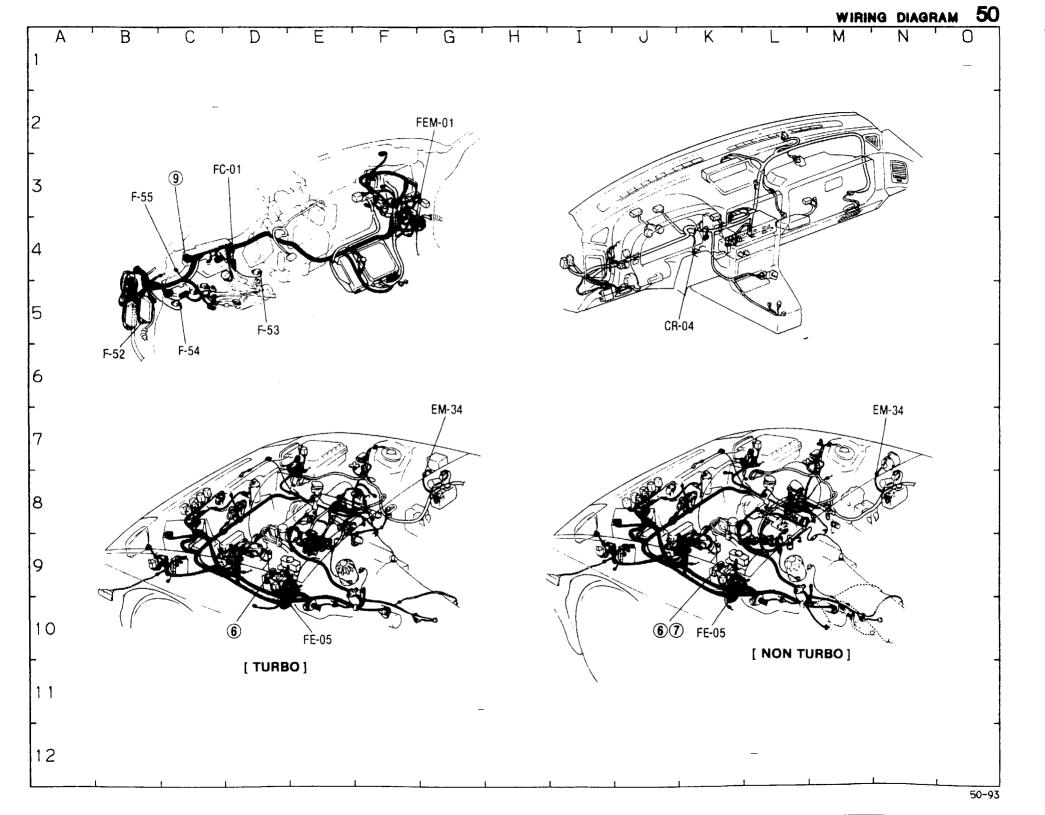


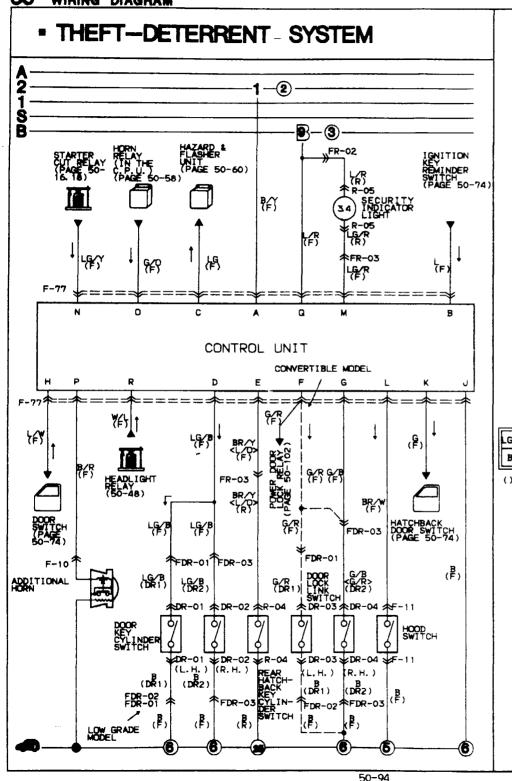


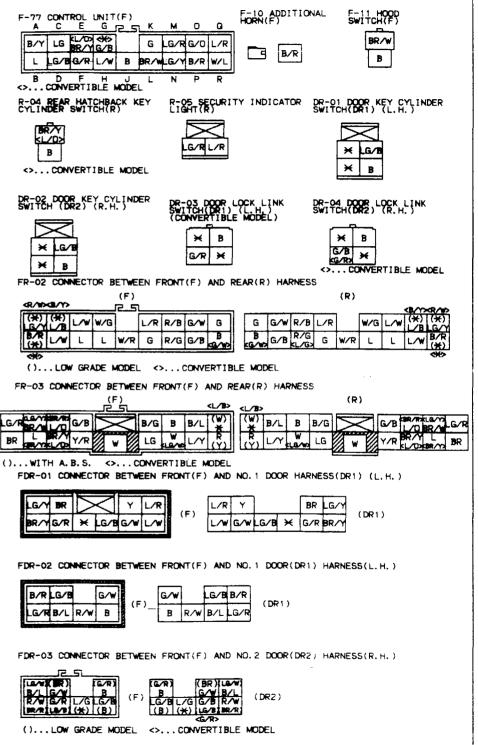

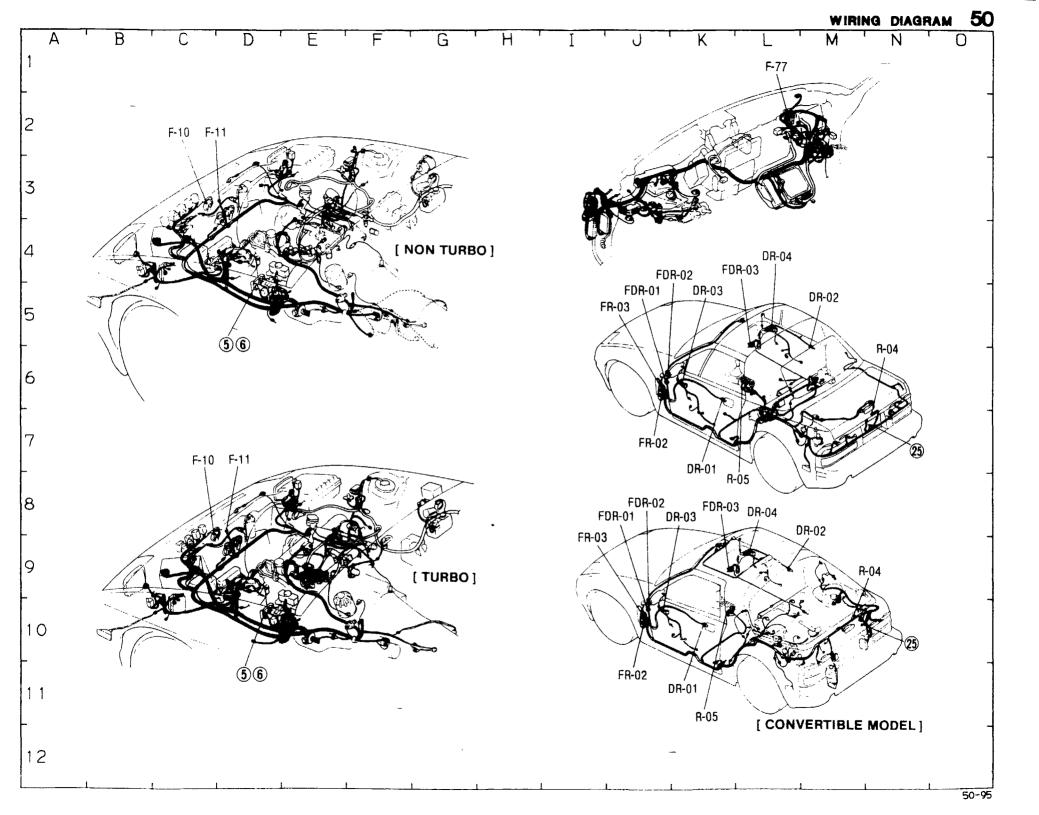



- AUDIO SYSTEM (WITH COMPACT DISC) - POWER ANTENNA

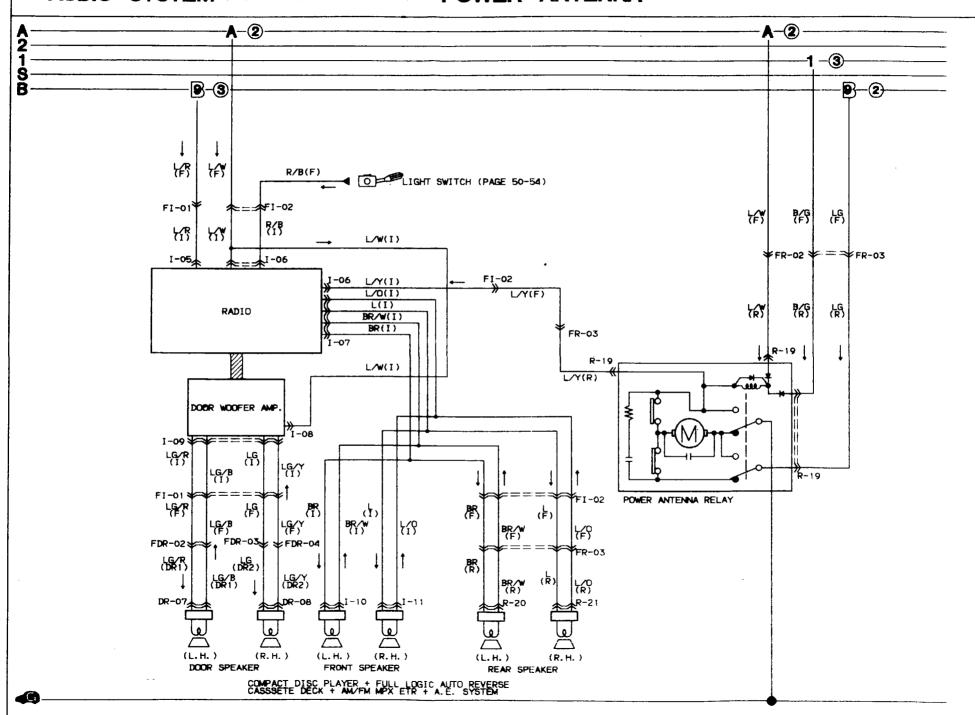


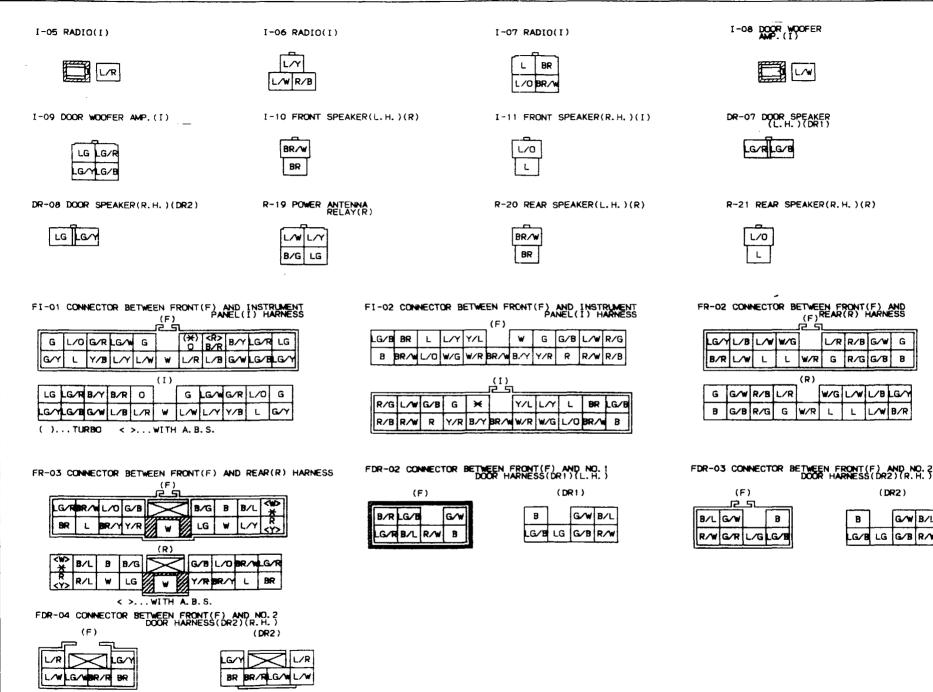



(DR2)

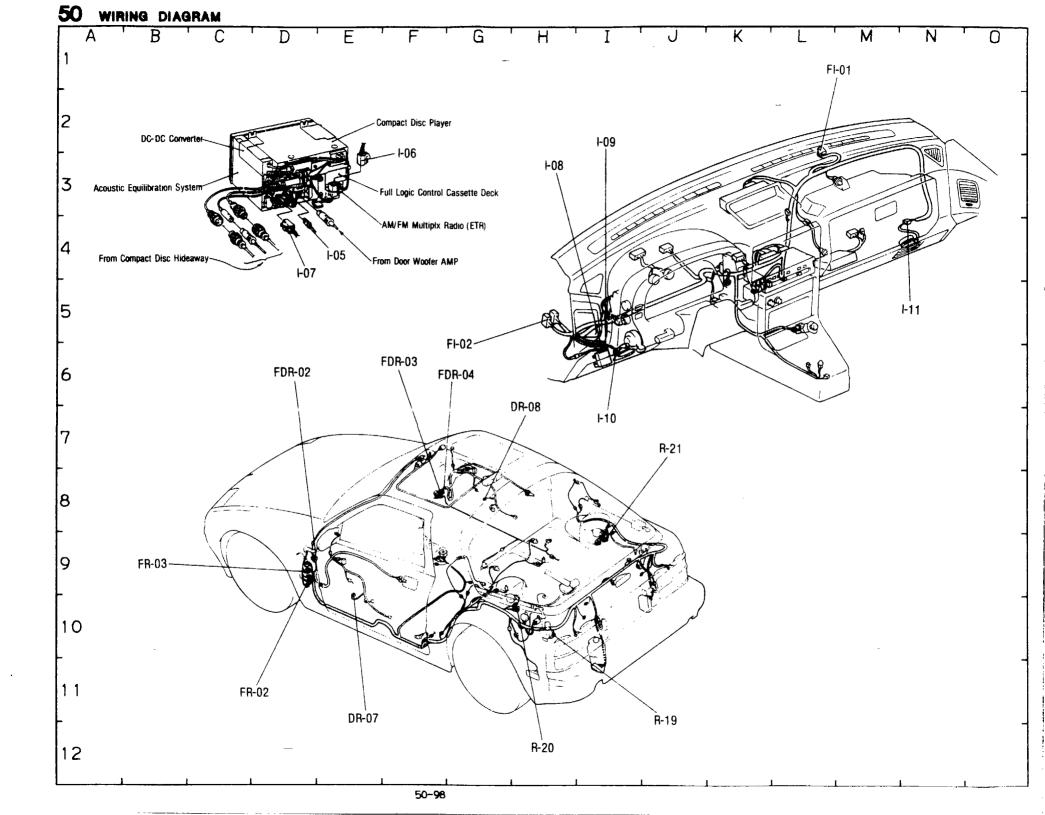

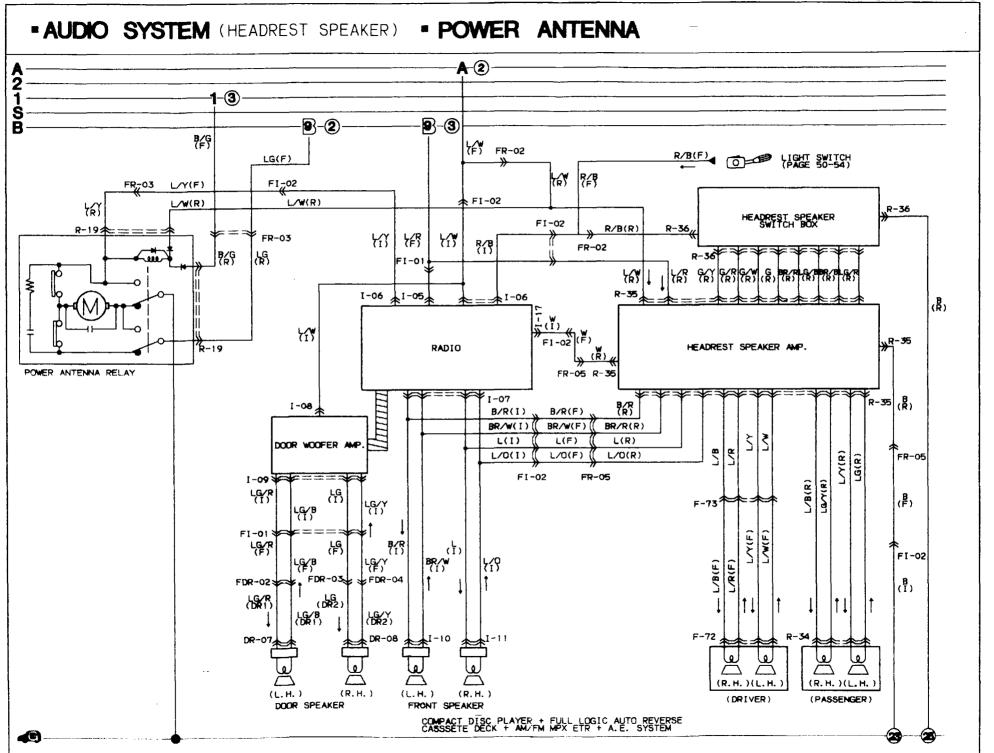

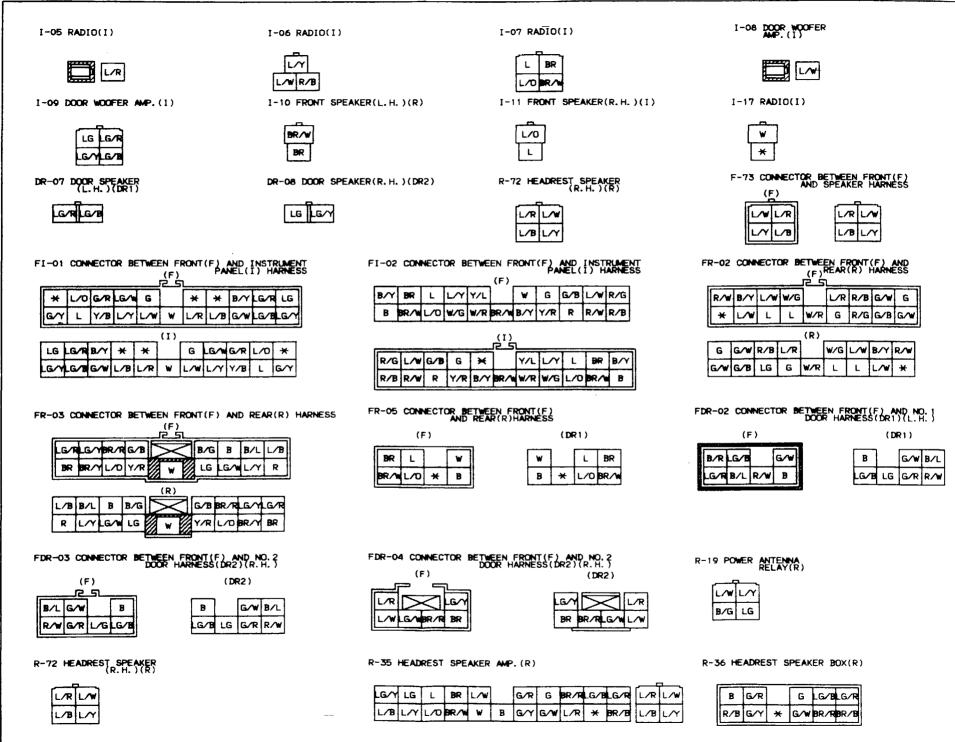


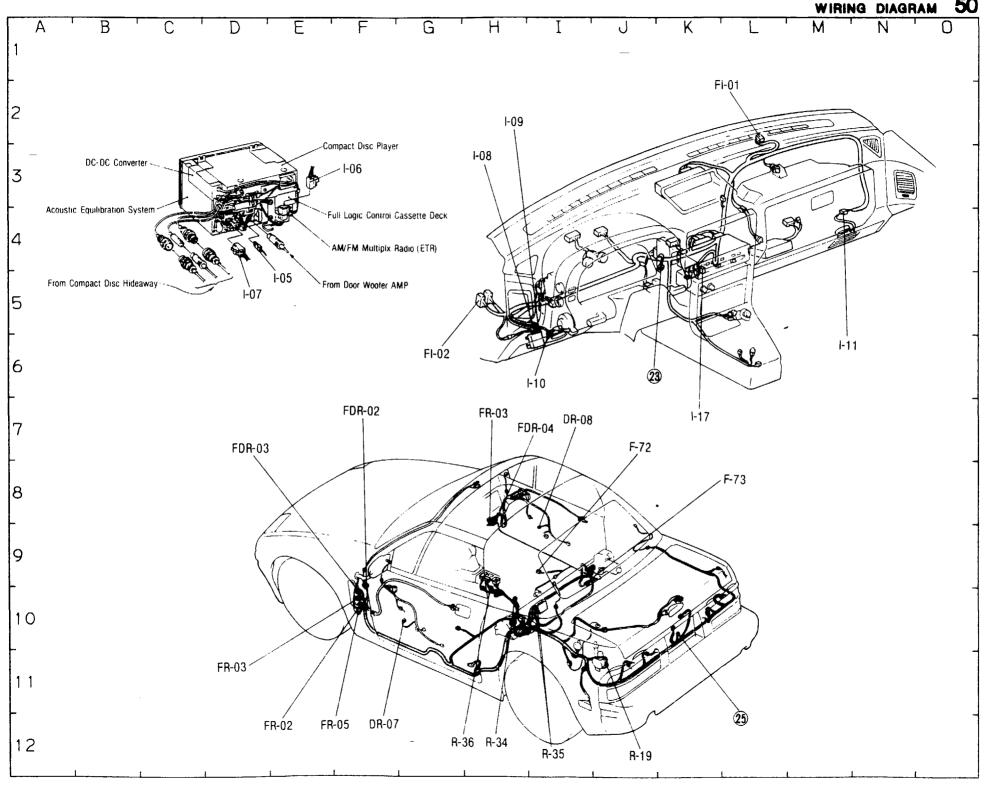

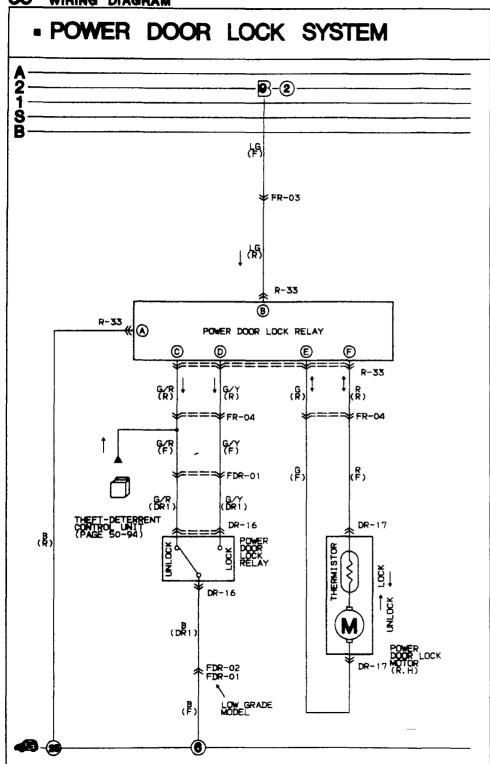

R-33 POWER DOOR LOCK RELAY(R)

DR-16 POWER DOOR LOCK SWITCH(DR1)





DR-17 POWER DOOR LOCK MOTOR(DR2)

FR-04 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS








FDR-01 CONNECTOR BETWEEN FRONT(F)AND DOOR NO. 1(DR1)HARNESS






()...LOW GRADE MODEL


FDR-02 CONNECTOR BETWEEN FRONT(F) AND NO. 1 DOOR(DR1) HARNESS



	(DR1)											
G∕w		LG/8	B/R									
В	R∕₩	B/L	LG/R									

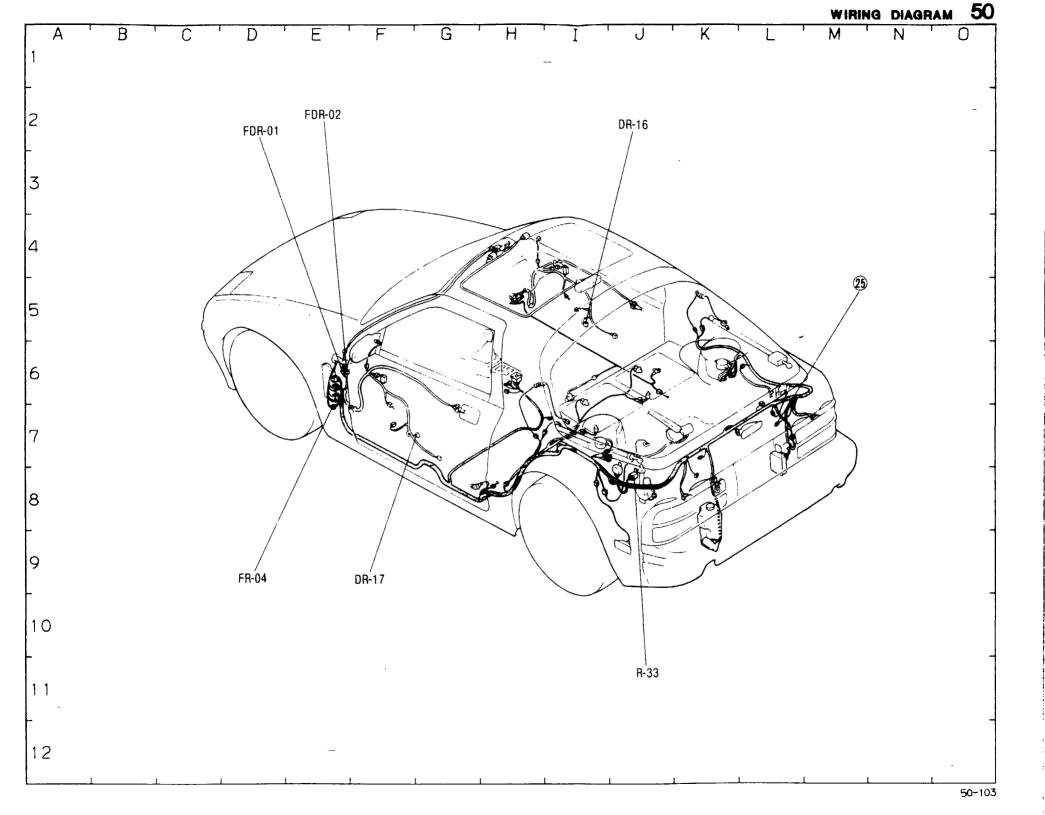

• ANTI-LOCK BRAKE SYSTEM

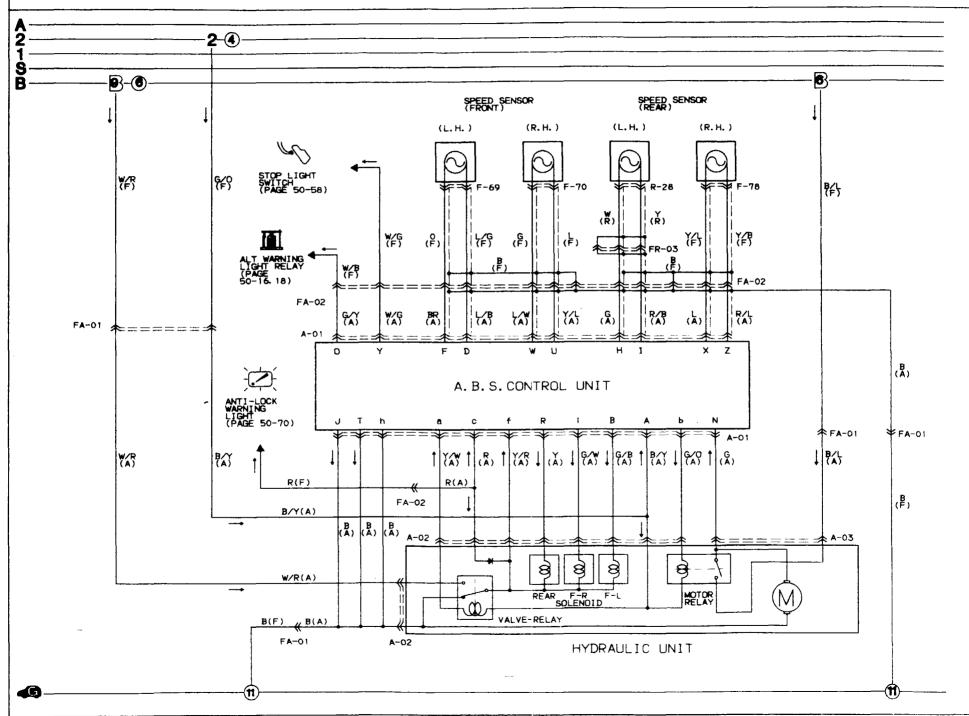

F-69 SPEED SENSOR(F.L.)(F)

F-70 SPEED SENSOR(F.R.)(F) F-78 SPEED SENSOR(R.R.)(F) R-28 SPEED SENSOR(R.L)(R)

A-02 HYDRAULIC UNIT(A)










A-03 HYDRAULIC UNIT(A)





A-01 CONTROL UNIT(A)

R	Q		Р	0	N	i N	4	L	K		J	I	ŀ	1 1	G	F	:	Ε	Đ)	С	В		A
				G/Y																				
G/	W	В	>	€ Y.	/R	×	×	R	G	/0	Y/	W R	/L	W/G	Į	-]	L/	w :	×	Υ/	L	В	×	Γ
		h	9	9	f		d	c		ь	a		Z.	Υ)	(W	1	٧	U		Т	s	

FA-01 CONNECTOR BETWEEN FRONT(F) AND A. B. S. (A) HARNESS

(F)

FA-02 CONNECTOR BETWEEN FRONT(F) AND A.B.S. (A) HARNESS






			_		_	
w/G	Y/L	W		G	0	W/B
R	Y/G	Y	В	L	L/G	В

G∕Y	B∕R	L/W		G	L	w/g	ł
В	L/B	Y/L	В	R/B	R/L	R	ľ


FR-03 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS

(F)




w	B/L	В	B/G		G/B	L/0	BR/W	LG/R
Υ	L/Y	>	LG		Y/R	LG/B	L	BR
				777	3			

(R)

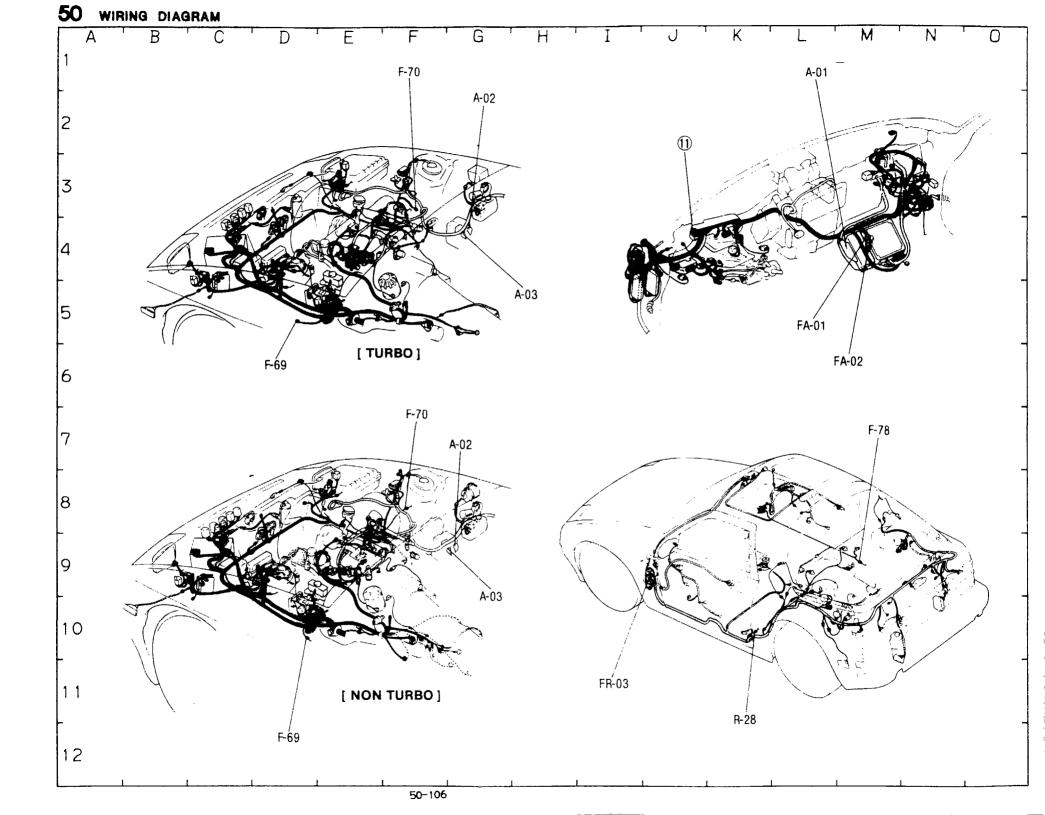

- CONVERTIBLE TOP CONTROL SYSTEM

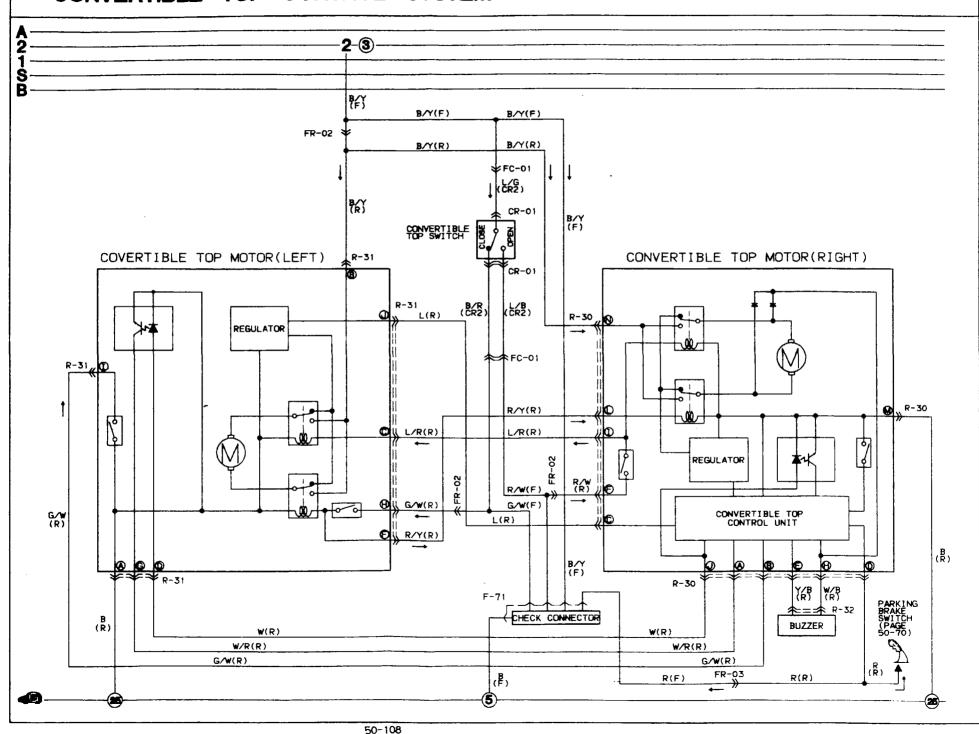

F-71 CHECK CONNECTOR(R) R-30 CONVERTIBLE TOP MOTOR(R.H.)(R) R-31 CONVERTIBLE TOP MOTOR(L.H.)(R) R-32 BUZZER(R)

R/W	B/Y	В
G∕₩	*	R

0	0	0		€	0	® _
В	*	L/R		Y/B	L	W/R
B/Y	R/Y	w	W/B	R/W	R	G/W
0	0	0	0	0	0	180

	0	G		0	(A)
	G∕₩	W/R		L/R	В
	٦	G/W	R/Y	W	B/Y
,	0	0	Ð	0	(B)



CR-01 CONVERTIBLE TOP SWITCH(CR2)


FR-02 CONNECTOR BETWEEN FRONT(F) AND REAR(R) HARNESS


G/0	R/G			L/G	L	L/B	1
B/R	G/W	B	L/R	L/W	L/O	LY	

				(F)	L			
R/W	B/Y	LW	W/G		L/R	R/B	G∕₩	G
×	L/W	L	L	W/R	G	R/G	G∕B	G∕₩


				_				
G	G∕₩	R/B	L/R		W/G	L\₩	B/Y	R/W
G/W	G/B	LG	G	W/R	L	L	L/W	*

FR-03 CONNECTOR BETWEEN FRONT(F)AND REAR(R)HARNESS





FC-01 CONNECTOR BETWEEN FRONT(F) AND CLUSTER SWITCH(CR2) HARNESS



Γ	В	G/Y	L/W	B/Y	G/0		R/G	B/R	L	L/V	L/Q
Γ	*	G	G/L	L/R	G∕ W	*	*	L/G	L/B	L/Y	L/R

(CR2)

